

Basic performance data - WAMAK TBW 200 EVI HeavyDuty 2L2

Heating - EN 14511		
Heating capacity [kW]	B0 / W35 (max)	192.2 (48.1 / 192.2)
	B0 / W35 (min)	48.1 (48.1 / 192.2)
	B0 / W34	192.0 (48.0 / 192.0)
Electrical power input [kW]	B0 / W35 (max)	43.4 (10.6 / 43.4)
	B0 / W35 (min)	10.6 (10.6 / 43.4)
	B0 / W34	42.5 (10.4 / 42.5)
Heating efficiency faktor [COP]	B0 / W35 (max)	4.43
	B0 / W35 (min)	4.52
	B0 / W34	4.52
Seasonal space heating energy efficiency - SCOP EN 14825		
Average Climate / Low Temperature [35 °C]	SCOP	5.02
	η [%]	200.8
	Label	A+++
	Qhe [kWh]	79033.8
	Pdesignh [kW]	192.2
	Tbivalent [°C]	-10
Cooling		
Cooling capacity - [kW]	A35 / W23-18	193.7
	A25 / W23-18	203.6
	A35 / W12-7	193.7
	A25 / W12-7	193.7
Seasonal space cooling energy efficiency - SEER EN 14825		
[W 23 / 18 °C]	SEER	5.14
	Qce [kWh]	21350.4
	η_c [%]	205.8
Sound EN 12102		
Acoustic power - Lw	dB(A)	69.6
Acoustic pressure - Lp	1 m dB(A)	61.6
	5 m dB(A)	47.6
	10 m dB(A)	41.6
Mechanical and operational information		
Compressor type (3~ 400/50)	SCROLL / 4 /	On/Off
Refrigerant	R410A (GWP - 2088)	2 x 11.5 kg
Operating limit temperatures heating - (min / max) [°C]		25 / 65
Operating limit temperatures source - (min / max) [°C]		-10 (7) / 30
Weight		1240 kg

Main technical data - WAMAK TBW 200 EVI HeavyDuty 2L2

Enclosure type			HD2L2			Heat energy rejection side data		
Basic dimensions	Height [mm]	2000		Operating limit temperatures heating	MAX [°C]	65		
	Width [mm]	1500			MIN [°C]	25		
	Length [mm]	1200		for more see operating limits diagram				
Weight [kg]	1240		Condenser	Port size	2 x VIC 2.1/2 "			
Colour	Gray			Type	BPHE			
Enclosure IP Class	IP20			Count	2			
Refrigeration cycle				Material	AISI 316			
Compressor	Type	Scroll		Maximal operating pressure - refrigerant [bar]		50		
	Number of stages	4		Maximal operating pressure - Water [bar]		6		
	On/Off			Testing pressure [bar]		70		
	Power factor Cosφ	0.64		Heat transfer medium		Water		
	Winding resistance	0.76 Ohm		Volume flow @ dT 5K (nom) - Water [m3/h]		8.31 ~ 33.22		
Refrigerant		R410A		Internal pressure drop - Water [kPa]		2 x 20		
	Volme	2 x 11.5 kg		Temperature difference	@ 35°C (nom)	5 K		
	GWP	2088			@ 55°C	8 K		
	Safety class	A1			@ 65°C	10 K		
Refrigeration oil type	POE RL32-3MAF		Renewable energy extraction side data					
	Oil volume	4 x 3.38 L		Operating limit temperatures source	MIN [°C]	-10 (7)		
Maximal pressure - refrigerant [bar]	50		for more see operating limits diagram					
	PED class	2		Evaporator	MAX [°C]	30		
EVI - vapour injection with economizer			Port size		2 x VIC 2.1/2 "			
Electrical connection data			Type		BPHE			
Line voltage [#~ V/Hz]	3~ 400/50		Count	2				
Current	nominal [A]	94.12		Material	AISI 316			
	maximal [A]	149.60		Maximal operating pressure - refrigerant [bar]		29		
	starting [A]	57.2		Heat transfer medium		Ethylenglykol		
Softstart	-		Brine proportion [%]		29			
Main safety	C160		Antifreeze to [°C]		-15			
Control System			Maximal operating pressure - Ethylenglykol [bar]		6			
Main controller	SIEMENS	RVS 61	Volume flow - Ethylenglykol [m3/h]		8.47 ~ 33.90			
Extension module	AVS75.3xx	AVS75.3xx	Internal pressure drop - Ethylenglykol [kPa]		2 x 20			
Bus Clip-In		LPB OCI346	Temperature difference - Ethylenglykol		4 K			
Online connection		Modbus OCI352						
Superheat controller		ToSyMo						
		SEC61						

*** with accessory

WAMAK TBW 200 EVI HeavyDuty 2L2

ErP (EU) No 811/2013: Technical parameters for heat pump space heaters

Model	TBW 200 EVI HeavyDuty 2L2
Air-to-water heat pump	no
Brine-to-water heat pump	yes
Water-to-water heat pump	no
Low-temperature heat pump	no
Equipped with a supplementary heater	no
Heat pump combination heater	no
Temperature application	low (35°C - 30°C)
Climate conditions	average

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output at Tdesignh	Prated	192.2	kW	Seasonal space heating energy efficiency	η_s	200.8	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	192.0	kW	Tj = -7 °C	COPd	4.52	-
Tj = +2 °C	Pdh	191.0	kW	Tj = +2 °C	COPd	4.9	-
Tj = +7 °C	Pdh	190.1	kW	Tj = +7 °C	COPd	5.4	-
Tj = +12 °C	Pdh	189.1	kW	Tj = +12 °C	COPd	5.7	-
Tj = bivalent temperature	Pdh	192.2	kW	Tj = bivalent temperature	COPd	4.4	-
Tj = operation limit temperature	Pdh	---	kW	Tj = operation limit temperature	COPd	---	-
Bivalent temperature	Tbiv	-10	°C	Tj = operation limit temperature	TOL	---	°C
Power consumption in modes other than active mode				Heating water operating limit temperature	WTOL	65	°C
Off mode	Poff	0.010	kW	Supplementary heater			
Thermostat-off mode	Pto	0.010	kW	Rated heat output	Psup	37.1	kW
Standby mode	Psb	0.010	kW	Type of energy input	electricity		
Crankcase heater mode	Pck	0.000	kW	For air-to-water heat pumps:			
Other items				Rated air flow rate, outdoors	-	---	m ³ /h
Capacity control	multi-stage			For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger			
Sound power level							
indoors	Lwa	70	dB				
outdoors	Lwa	---	dB				
Annual energy consumption	Q _{HE}	79033.8	kWh				

Contact details: WAMAK, s.r.o., Orovnicna 252, 96652, Orovnicna, Slovakia, info@wamak.sk

WAMAK TBW 200 EVI HeavyDuty 2L2

ErP (EU) No 811/2013: Technical parameters for heat pump space heaters

Model	TBW 200 EVI HeavyDuty 2L2
Air-to-water heat pump	no
Brine-to-water heat pump	yes
Water-to-water heat pump	no
Low-temperature heat pump	no
Equipped with a supplementary heater	no
Heat pump combination heater	no
Temperature application	middle (55 °C - 47 °C)
Climate conditions	average

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output at Tdesignh	Prated	196.6	kW	Seasonal space heating energy efficiency	η_s	160.7	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	197.8	kW	Tj = -7 °C	COPd	3.29	-
Tj = +2 °C	Pdh	197.8	kW	Tj = +2 °C	COPd	4.1	-
Tj = +7 °C	Pdh	194.4	kW	Tj = +7 °C	COPd	4.6	-
Tj = +12 °C	Pdh	193.3	kW	Tj = +12 °C	COPd	5.0	-
Tj = bivalent temperature	Pdh	196.6	kW	Tj = bivalent temperature	COPd	2.9	-
Tj = operation limit temperature	Pdh	---	kW	Tj = operation limit temperature	COPd	---	-
Bivalent temperature	Tbiv	-10	°C	Tj = operation limit temperature	TOL	---	°C
Power consumption in modes other than active mode				Heating water operating limit temperature	WTOL	65	°C
Off mode	Poff	0.010	kW	Supplementary heater			
Thermostat-off mode	Pto	0.010	kW	Rated heat output	Psup	37.1	kW
Standby mode	Psb	0.010	kW	Type of energy input	electricity		
Crankcase heater mode	Pck	0.000	kW	For air-to-water heat pumps:			
Other items				Rated air flow rate, outdoors	-	---	m ³ /h
Capacity control	multi-stage			For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger			
Sound power level							
indoors	Lwa	70	dB				
outdoors	Lwa	---	dB				
Annual energy consumption	Q _{HE}	101026.4	kWh				

Contact details: WAMAK, s.r.o., Orovnicna 252, 96652, Orovnicna, Slovakia, info@wamak.sk



ENERG Y IIA
 енергия - ενεργεια IE IA



TBW 200 EVI
 HeavyDuty 2L2



55 °C

35 °C



A+++

A+++



70 dB



--- dB

■ 207	■ 197
■ 197	■ 193
■ 193	■ 183
kW	kW



2019

811/2013

TBW 200 EVI
 HeavyDuty 2L2

ErP Data

	55 °C	35 °C
Energy class	A+++	A+++
η [%]	160.7	200.8
P_{rated} [kW]	197	193
Q_{HE} [kWh/y]	101027	79034
SCOP [-]	4.02	5.02
$T_{bivalent}$ [°C]	-10	-10

CONTROLLER



+ QAA55/75 class VII 3.5% ↓
 - QAA55/75 class III 1.5% ↓

Heating performance data

Version: v2024.010-BW-WW

Source - Brine [0°C] / Low Temperature [35°C]

ZHI46K1P-TWD_R410A_4_BWW

Operating conditions		Qh	P	COP
1	B0 / W30-35	192.2	43.4	4.43
2	B0 / W30-35 (MIN)	48.1	10.6	4.52
A	B0 / Wxx-34	192.0	42.5	4.52
B	B0 / Wxx-30	191.0	38.8	4.92
C	B0 / Wxx-27	47.5	8.9	5.35
D	B0 / Wxx-24	47.3	8.3	5.71
E	B0 / Wxx-35	192.2	43.4	4.43
F	B0 / Wxx-35	192.2	43.4	4.43

SCOP DATA EN 14825:2018	
Source - Brine [0°C] / Low Temperature [35°C]	
SCOPon	5.02
SCOPnet	5.02
SCOP	5.02
η [%]	200.83
Label	A+++
Qh [kWh]	79034
Pdesignh [kW]	192.2
Tbivalent [°C]	-10

Source - Brine [0°C] / Medium Temperature [55°C]

Operating conditions		Qh	P	COP
1	B0 / W47-55	196.6	68.0	2.89
2	B0 / W47-55 (MIN)	49.1	16.5	2.95
A	B0 / Wxx-52	197.8	62.1	3.29
B	B0 / Wxx-42	197.8	48.5	4.13
C	B0 / Wxx-36	48.6	10.5	4.62
D	B0 / Wxx-30	48.3	9.5	5.08
E	B0 / Wxx-55	196.6	68.0	2.89
F	B0 / Wxx-54	198.0	63.5	3.12

SCOP DATA EN 14825:2018	
Source - Brine [0°C] / Medium Temperature [55°C]	
SCOPon	4.02
SCOPnet	4.02
SCOP	4.02
η [%]	160.73
Label	A+++
Qh [kWh]	101026
Pdesignh [kW]	196.6
Tbivalent [°C]	-10

Source - Water [10°C] / Low Temperature [35°C]

Operating conditions		Qh	P	COP
1	W10 / W30-35	242.4	43.4	5.58
2	W10 / W30-35 (MIN)	60.6	10.6	5.70
A	W10 / Wxx-34	242.4	42.5	5.70
B	W10 / Wxx-30	242.6	39.0	6.21
C	W10 / Wxx-27	242.6	36.6	6.76
D	W10 / Wxx-24	242.6	34.3	7.21
E	W10 / Wxx-35	242.4	43.4	5.58
F	W10 / Wxx-35	242.4	43.4	5.58

SCOP DATA EN 14825:2018	
Source - Water [10°C] / Low Temperature [35°C]	
SCOPon	6.35
SCOPnet	6.35
SCOP	6.34
η [%]	253.69
Label	A+++
Qh [kWh]	78909
Pdesignh [kW]	242.4
Tbivalent [°C]	-10.00

WAMAK TBW 200 EVI HeavyDuty 2L2

Source - Water [10°C] / Medium Temperature [55°C]

	Operating conditions	Qh	P	COP
1	W10 / W47-55	241.8	68.1	3.55
2	W10 / W47-55 (MIN)	60.5	16.7	3.63
A	W10 / Wxx-52	244.2	62.0	3.94
B	W10 / Wxx-42	244.8	48.4	5.06
C	W10 / Wxx-36	245.2	43.0	5.83
D	W10 / Wxx-30	245.4	39.1	6.41
E	W10 / Wxx-55	241.8	68.1	3.55
F	W10 / Wxx-55	241.8	68.1	3.55

SCOP DATA EN 14825:2018	
Source - Water [10°C] / Medium Temperature [55°C]	
SCOPon	4.92
SCOPnet	4.92
SCOP	4.92
η [%]	196.92
Label	A+++
Qh [kWh]	101418
Pdesignh [kW]	241.8
Tbivalent [°C]	-10.00

Low temperature cooling W 12 / 7°C

	Operating conditions	Qc	P	EER
A	W30-35 / W12-7	149.6	46.4	3.22
B	W26-xx / W12-7	152.3	42.5	3.59
C	W22-xx / W12-7	154.7	38.8	3.98
D	W18-xx / W12-7	155.7	37.1	4.20

SEER DATA EN 14825:2018 [W 12 / 7°C]	
SEERon	3.86
SEER	3.86
Qc [kWh]	87300
η [%]	154.49

Radiant cooling W 23 / 18°C

	Operating conditions	Qc	P	EER
A	W50-xx / W23-18	173.7	73.0	2.38
B	W40-xx / W23-18	187.8	58.0	3.24
C	W30-35 / W23-18	199.0	46.4	4.29
D	W26-xx / W23-18	202.7	42.5	4.77


SEER DATA EN 14825:2018 [W 23 / 18°C]	
SEERon	5.15
SEER	5.14
Qc [kWh]	87300
η [%]	205.77

WAMAK TBW 200 EVI HeavyDuty 2L2

ZHI46K1P-TWD_R410A_4_BWW


Performance lines - heating

- Qh-nom-35
- - - Qh-min-35
- - - Qh-max-65
- Qh-nom-45
- Qh-nom-55
- Qh-nom-65

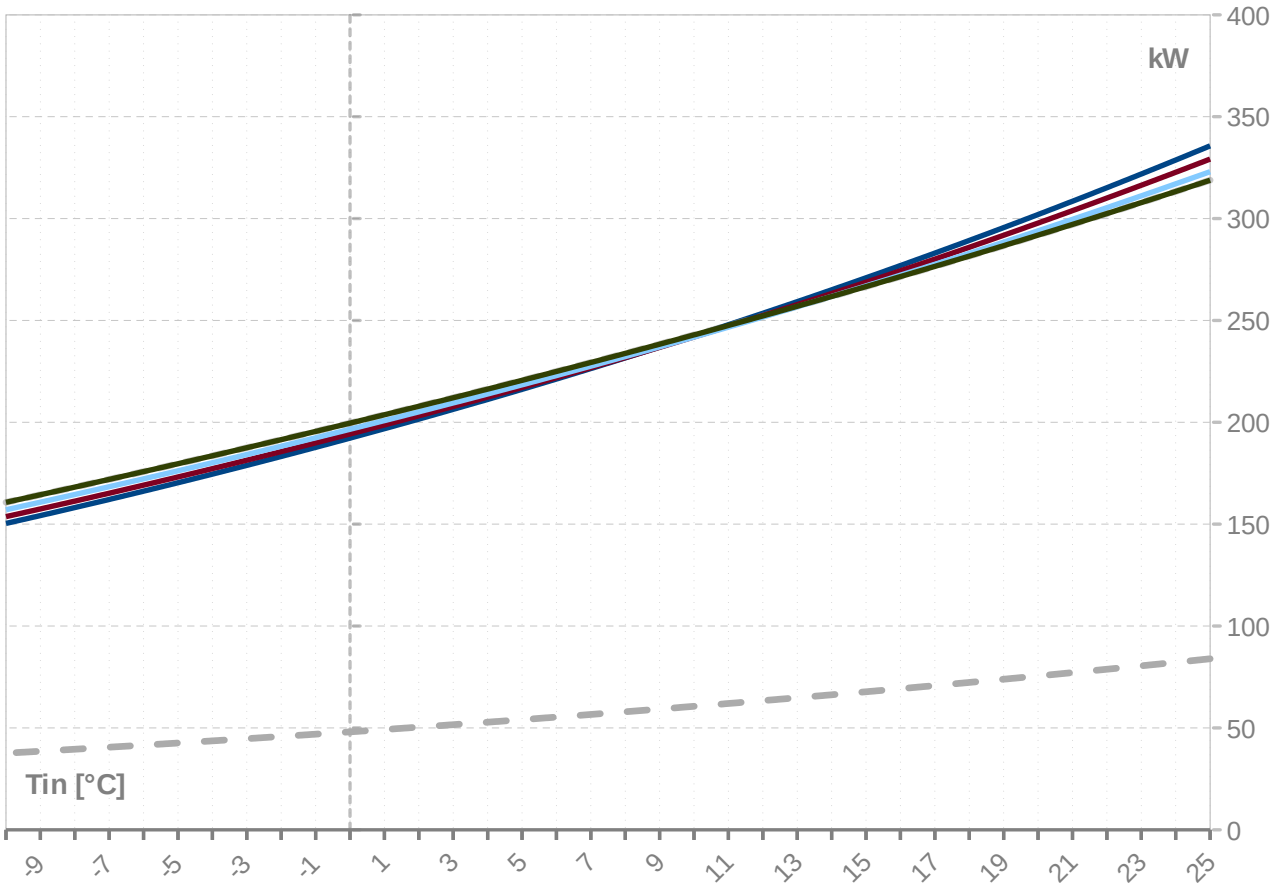

Performance lines - cooling

- Qc-nom-12-7
- Qc-nom-23-18

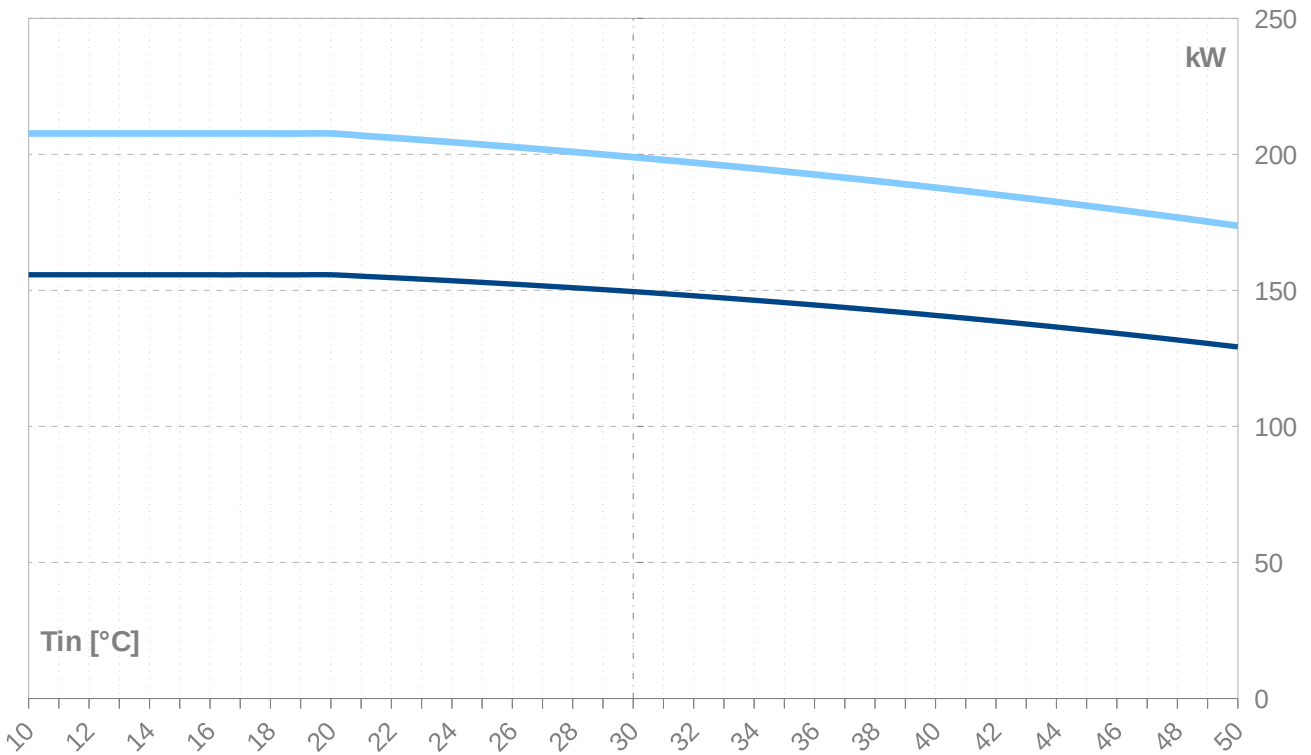

WAMAK TBW 200 EVI HeavyDuty 2L2

Th -OU	35										
Ts -IN [°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin min [kW]	Pin max [kW]	COP nom kW / kW	Qc nom [kW]	Qc min [kW]	Qc max [kW]	I nom [A]
25	335.7	83.9	335.7	44.2	10.8	44.2	7.59	294.4	73.6	294.4	93.6
24	328.7	82.2	328.7	44.1	10.8	44.1	7.45	287.5	71.9	287.5	93.4
23	321.9	80.5	321.9	44.0	10.8	44.0	7.31	280.8	70.2	280.8	93.3
22	315.1	78.8	315.1	43.9	10.8	43.9	7.18	274.1	68.5	274.1	93.2
21	308.5	77.1	308.5	43.8	10.7	43.8	7.04	267.6	66.9	267.6	93.1
20	302.0	75.5	302.0	43.8	10.7	43.8	6.90	261.1	65.3	261.1	93.0
19	295.6	73.9	295.6	43.7	10.7	43.7	6.76	254.8	63.7	254.8	93.0
18	289.3	72.3	289.3	43.6	10.7	43.6	6.63	248.5	62.1	248.5	92.9
17	283.0	70.8	283.0	43.6	10.7	43.6	6.49	242.3	60.6	242.3	92.9
16	276.9	69.2	276.9	43.5	10.7	43.5	6.36	236.3	59.1	236.3	92.9
15	270.9	67.7	270.9	43.5	10.7	43.5	6.23	230.3	57.6	230.3	93.0
14	265.0	66.3	265.0	43.5	10.6	43.5	6.10	224.4	56.1	224.4	93.0
13	259.2	64.8	259.2	43.5	10.6	43.5	5.96	218.6	54.7	218.6	93.1
12	253.5	63.4	253.5	43.4	10.6	43.4	5.84	212.9	53.2	212.9	93.1
11	247.9	62.0	247.9	43.4	10.6	43.4	5.71	207.3	51.8	207.3	93.2
10	242.4	60.6	242.4	43.4	10.6	43.4	5.58	201.8	50.5	201.8	93.3
9	237.0	59.2	237.0	43.4	10.6	43.4	5.46	196.4	49.1	196.4	93.4
8	231.6	57.9	231.6	43.4	10.6	43.4	5.34	191.1	47.8	191.1	93.5
7	226.4	56.6	226.4	43.4	10.6	43.4	5.22	185.9	46.5	185.9	93.6
6	221.2	55.3	221.2	43.4	10.6	43.4	5.10	180.7	45.2	180.7	93.7
5	216.2	54.0	216.2	43.4	10.6	43.4	4.98	175.7	43.9	175.7	93.8
4	211.2	52.8	211.2	43.4	10.6	43.4	4.87	170.7	42.7	170.7	93.9
3	206.3	51.6	206.3	43.4	10.6	43.4	4.75	165.8	41.4	165.8	94.1
2	201.6	50.4	201.6	43.4	10.6	43.4	4.64	161.0	40.3	161.0	94.2
1	196.8	49.2	196.8	43.4	10.6	43.4	4.53	156.3	39.1	156.3	94.3
0	192.2	48.1	192.2	43.4	10.6	43.4	4.43	151.7	37.9	151.7	94.4
-1	187.7	46.9	187.7	43.4	10.6	43.4	4.32	147.1	36.8	147.1	94.5
-2	183.2	45.8	183.2	43.4	10.6	43.4	4.22	142.7	35.7	142.7	94.6
-3	178.8	44.7	178.8	43.4	10.6	43.4	4.12	138.3	34.6	138.3	94.7
-4	174.5	43.6	174.5	43.4	10.6	43.4	4.02	134.0	33.5	134.0	94.8
-5	170.3	42.6	170.3	43.4	10.6	43.4	3.93	129.8	32.5	129.8	94.8
-6	166.2	41.5	166.2	43.4	10.6	43.4	3.83	125.7	31.4	125.7	94.9
-7	162.1	40.5	162.1	43.3	10.6	43.3	3.74	121.6	30.4	121.6	94.9
-8	158.1	39.5	158.1	43.3	10.6	43.3	3.65	117.7	29.4	117.7	95.0
-9	154.2	38.6	154.2	43.3	10.6	43.3	3.56	113.8	28.4	113.8	95.0
-10	150.4	37.6	150.4	43.2	10.6	43.2	3.48	110.0	27.5	110.0	95.0
-11	146.6	36.6	146.6	43.2	10.6	43.2	3.39	106.3	26.6	106.3	95.0
-12	142.9	35.7	142.9	43.1	10.6	43.1	3.31	102.6	25.7	102.6	94.9
-13	139.2	34.8	139.2	43.1	10.5	43.1	3.23	99.0	24.8	99.0	94.9
-14	135.7	33.9	135.7	43.0	10.5	43.0	3.16	95.6	23.9	95.6	94.8
-15	132.2	33.0	132.2	42.9	10.5	42.9	3.08	92.1	23.0	92.1	94.7

-- attention: operating limits not reflected in performance table

ZHI46K1P-TWD_R410A_4_BWW

WAMAK TBW 200 EVI HeavyDuty 2L2

Th -OU	45										
[°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin min [kW]	Pin max [kW]	COP nom kW / kW	Qc nom [kW]	Qc min [kW]	Qc max [kW]	I nom [A]
25	329.2	82.3	329.2	53.3	13.1	53.3	6.18	279.4	69.9	279.4	105.8
24	322.7	80.7	322.7	53.3	13.0	53.3	6.06	273.0	68.2	273.0	105.7
23	316.3	79.1	316.3	53.3	13.0	53.3	5.94	266.6	66.7	266.6	105.6
22	310.1	77.5	310.1	53.2	13.0	53.2	5.82	260.3	65.1	260.3	105.5
21	303.9	76.0	303.9	53.2	13.0	53.2	5.71	254.2	63.5	254.2	105.4
20	297.8	74.4	297.8	53.2	13.0	53.2	5.59	248.1	62.0	248.1	105.4
19	291.8	73.0	291.8	53.2	13.0	53.2	5.48	242.1	60.5	242.1	105.4
18	285.9	71.5	285.9	53.3	13.0	53.3	5.37	236.2	59.0	236.2	105.4
17	280.1	70.0	280.1	53.3	13.0	53.3	5.26	230.4	57.6	230.4	105.4
16	274.4	68.6	274.4	53.3	13.1	53.3	5.15	224.6	56.2	224.6	105.4
15	268.8	67.2	268.8	53.3	13.1	53.3	5.04	219.0	54.7	219.0	105.4
14	263.2	65.8	263.2	53.3	13.1	53.3	4.94	213.4	53.4	213.4	105.4
13	257.8	64.4	257.8	53.4	13.1	53.4	4.83	207.9	52.0	207.9	105.5
12	252.4	63.1	252.4	53.4	13.1	53.4	4.73	202.5	50.6	202.5	105.5
11	247.1	61.8	247.1	53.4	13.1	53.4	4.63	197.2	49.3	197.2	105.6
10	241.9	60.5	241.9	53.4	13.1	53.4	4.53	192.0	48.0	192.0	105.6
9	236.8	59.2	236.8	53.5	13.1	53.5	4.43	186.9	46.7	186.9	105.6
8	231.8	57.9	231.8	53.5	13.1	53.5	4.33	181.8	45.4	181.8	105.7
7	226.8	56.7	226.8	53.5	13.1	53.5	4.24	176.8	44.2	176.8	105.7
6	221.9	55.5	221.9	53.5	13.1	53.5	4.14	171.9	43.0	171.9	105.8
5	217.1	54.3	217.1	53.6	13.1	53.6	4.05	167.1	41.8	167.1	105.8
4	212.4	53.1	212.4	53.6	13.1	53.6	3.96	162.4	40.6	162.4	105.9
3	207.8	51.9	207.8	53.6	13.1	53.6	3.88	157.7	39.4	157.7	105.9
2	203.2	50.8	203.2	53.6	13.1	53.6	3.79	153.1	38.3	153.1	105.9
1	198.7	49.7	198.7	53.6	13.1	53.6	3.71	148.6	37.2	148.6	105.9
0	194.3	48.6	194.3	53.6	13.1	53.6	3.62	144.2	36.0	144.2	105.9
-1	189.9	47.5	189.9	53.6	13.1	53.6	3.54	139.8	35.0	139.8	105.9
-2	185.6	46.4	185.6	53.6	13.1	53.6	3.46	135.6	33.9	135.6	105.9
-3	181.4	45.3	181.4	53.6	13.1	53.6	3.39	131.4	32.8	131.4	105.8
-4	177.2	44.3	177.2	53.5	13.1	53.5	3.31	127.2	31.8	127.2	105.8
-5	173.2	43.3	173.2	53.5	13.1	53.5	3.24	123.2	30.8	123.2	105.7
-6	169.1	42.3	169.1	53.5	13.1	53.5	3.16	119.2	29.8	119.2	105.6
-7	165.2	41.3	165.2	53.4	13.1	53.4	3.09	115.3	28.8	115.3	105.5
-8	161.3	40.3	161.3	53.4	13.1	53.4	3.02	111.5	27.9	111.5	105.4
-9	157.5	39.4	157.5	53.3	13.0	53.3	2.96	107.7	26.9	107.7	105.2
-10	153.7	38.4	153.7	53.2	13.0	53.2	2.89	104.0	26.0	104.0	105.0
-11	150.0	37.5	150.0	53.1	13.0	53.1	2.82	100.4	25.1	100.4	104.8
-12	146.3	36.6	146.3	53.0	13.0	53.0	2.76	96.8	24.2	96.8	104.6
-13	142.7	35.7	142.7	52.9	12.9	52.9	2.70	93.4	23.3	93.4	104.3
-14	139.2	34.8	139.2	52.7	12.9	52.7	2.64	89.9	22.5	89.9	104.0
-15	135.7	33.9	135.7	52.6	12.9	52.6	2.58	86.6	21.6	86.6	103.7

-- attention: operating limits not reflected in performance table

WAMAK TBW 200 EVI HeavyDuty 2L2

Th -OU	55										
[°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin min [kW]	Pin max [kW]	COP nom kW / kW	Qc nom [kW]	Qc min [kW]	Qc max [kW]	I nom [A]
25	323.0	80.8	323.0	67.4	16.5	67.4	4.79	260.1	65.0	260.1	122.6
24	317.0	79.3	317.0	67.4	16.5	67.4	4.70	254.1	63.5	254.1	122.6
23	311.1	77.8	311.1	67.5	16.5	67.5	4.61	248.1	62.0	248.1	122.6
22	305.3	76.3	305.3	67.5	16.5	67.5	4.52	242.3	60.6	242.3	122.6
21	299.6	74.9	299.6	67.6	16.5	67.6	4.44	236.5	59.1	236.5	122.6
20	294.0	73.5	294.0	67.6	16.6	67.6	4.35	230.8	57.7	230.8	122.6
19	288.4	72.1	288.4	67.7	16.6	67.7	4.26	225.2	56.3	225.2	122.6
18	282.9	70.7	282.9	67.7	16.6	67.7	4.18	219.7	54.9	219.7	122.7
17	277.5	69.4	277.5	67.8	16.6	67.8	4.10	214.3	53.6	214.3	122.7
16	272.2	68.1	272.2	67.8	16.6	67.8	4.01	208.9	52.2	208.9	122.8
15	267.0	66.7	267.0	67.9	16.6	67.9	3.93	203.6	50.9	203.6	122.8
14	261.8	65.4	261.8	67.9	16.6	67.9	3.86	198.4	49.6	198.4	122.9
13	256.7	64.2	256.7	67.9	16.6	67.9	3.78	193.2	48.3	193.2	122.9
12	251.7	62.9	251.7	68.0	16.6	68.0	3.70	188.2	47.0	188.2	123.0
11	246.7	61.7	246.7	68.0	16.7	68.0	3.63	183.2	45.8	183.2	123.0
10	241.8	60.5	241.8	68.1	16.7	68.1	3.55	178.3	44.6	178.3	123.0
9	237.0	59.3	237.0	68.1	16.7	68.1	3.48	173.4	43.4	173.4	123.1
8	232.3	58.1	232.3	68.1	16.7	68.1	3.41	168.6	42.2	168.6	123.1
7	227.6	56.9	227.6	68.1	16.7	68.1	3.34	163.9	41.0	163.9	123.1
6	223.0	55.7	223.0	68.1	16.7	68.1	3.27	159.3	39.8	159.3	123.1
5	218.4	54.6	218.4	68.1	16.7	68.1	3.20	154.8	38.7	154.8	123.1
4	213.9	53.5	213.9	68.1	16.7	68.1	3.14	150.3	37.6	150.3	123.1
3	209.5	52.4	209.5	68.1	16.7	68.1	3.07	145.9	36.5	145.9	123.0
2	205.1	51.3	205.1	68.1	16.7	68.1	3.01	141.5	35.4	141.5	123.0
1	200.8	50.2	200.8	68.1	16.7	68.1	2.95	137.2	34.3	137.2	122.9
0	196.6	49.1	196.6	68.0	16.7	68.0	2.89	133.0	33.3	133.0	122.8
-1	192.4	48.1	192.4	68.0	16.7	68.0	2.83	128.9	32.2	128.9	122.7
-2	188.2	47.1	188.2	67.9	16.6	67.9	2.77	124.8	31.2	124.8	122.6
-3	184.2	46.0	184.2	67.9	16.6	67.9	2.71	120.8	30.2	120.8	122.4
-4	180.1	45.0	180.1	67.8	16.6	67.8	2.66	116.8	29.2	116.8	122.2
-5	176.2	44.0	176.2	67.7	16.6	67.7	2.60	112.9	28.2	112.9	122.0
-6	172.2	43.1	172.2	67.6	16.6	67.6	2.55	109.1	27.3	109.1	121.8
-7	168.4	42.1	168.4	67.5	16.5	67.5	2.50	105.4	26.3	105.4	121.5
-8	164.5	41.1	164.5	67.3	16.5	67.3	2.44	101.7	25.4	101.7	121.2
-9	160.8	40.2	160.8	67.2	16.5	67.2	2.39	98.0	24.5	98.0	120.9
-10	157.1	39.3	157.1	67.0	16.4	67.0	2.34	94.5	23.6	94.5	120.6
-11	153.4	38.3	153.4	66.9	16.4	66.9	2.29	90.9	22.7	90.9	120.2
-12	149.7	37.4	149.7	66.7	16.3	66.7	2.25	87.5	21.9	87.5	119.8
-13	146.2	36.5	146.2	66.4	16.3	66.4	2.20	84.1	21.0	84.1	119.3
-14	142.6	35.7	142.6	66.2	16.2	66.2	2.15	80.8	20.2	80.8	118.8
-15	139.1	34.8	139.1	66.0	16.2	66.0	2.11	77.5	19.4	77.5	118.3

-- attention: operating limits not reflected in performance table

WAMAK TBW 200 EVI HeavyDuty 2L2

Th -OU	65 (T-max)										
[°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin min [kW]	Pin max [kW]	COP nom kW / kW	Qc nom [kW]	Qc min [kW]	Qc max [kW]	I nom [A]
25	318.8	79.7	318.8	85.9	21.0	85.9	3.71	238.6	59.7	238.6	144.0
24	313.3	78.3	313.3	85.9	21.0	85.9	3.65	233.0	58.3	233.0	144.1
23	307.8	77.0	307.8	86.0	21.1	86.0	3.58	227.5	56.9	227.5	144.2
22	302.4	75.6	302.4	86.1	21.1	86.1	3.51	222.1	55.5	222.1	144.3
21	297.1	74.3	297.1	86.1	21.1	86.1	3.45	216.7	54.2	216.7	144.4
20	291.9	73.0	291.9	86.2	21.1	86.2	3.39	211.4	52.8	211.4	144.6
19	286.7	71.7	286.7	86.3	21.1	86.3	3.32	206.1	51.5	206.1	144.7
18	281.6	70.4	281.6	86.3	21.1	86.3	3.26	201.0	50.2	201.0	144.8
17	276.5	69.1	276.5	86.4	21.1	86.4	3.20	195.9	49.0	195.9	144.9
16	271.5	67.9	271.5	86.4	21.2	86.4	3.14	190.9	47.7	190.9	145.0
15	266.6	66.7	266.6	86.4	21.2	86.4	3.08	185.9	46.5	185.9	145.1
14	261.8	65.4	261.8	86.5	21.2	86.5	3.03	181.0	45.3	181.0	145.2
13	257.0	64.2	257.0	86.5	21.2	86.5	2.97	176.2	44.0	176.2	145.3
12	252.2	63.1	252.2	86.5	21.2	86.5	2.92	171.4	42.9	171.4	145.4
11	247.5	61.9	247.5	86.5	21.2	86.5	2.86	166.7	41.7	166.7	145.4
10	242.9	60.7	242.9	86.5	21.2	86.5	2.81	162.1	40.5	162.1	145.5
9	238.3	59.6	238.3	86.5	21.2	86.5	2.75	157.5	39.4	157.5	145.5
8	233.8	58.5	233.8	86.5	21.2	86.5	2.70	153.0	38.3	153.0	145.5
7	229.4	57.3	229.4	86.5	21.2	86.5	2.65	148.6	37.1	148.6	145.5
6	225.0	56.2	225.0	86.5	21.2	86.5	2.60	144.2	36.1	144.2	145.5
5	220.6	55.2	220.6	86.4	21.2	86.4	2.55	139.9	35.0	139.9	145.5
4	216.3	54.1	216.3	86.4	21.1	86.4	2.50	135.7	33.9	135.7	145.4
3	212.0	53.0	212.0	86.3	21.1	86.3	2.46	131.5	32.9	131.5	145.4
2	207.8	52.0	207.8	86.2	21.1	86.2	2.41	127.3	31.8	127.3	145.3
1	203.7	50.9	203.7	86.1	21.1	86.1	2.37	123.3	30.8	123.3	145.2
0	199.6	49.9	199.6	86.0	21.1	86.0	2.32	119.2	29.8	119.2	145.0
-1	195.5	48.9	195.5	85.9	21.0	85.9	2.28	115.3	28.8	115.3	144.8
-2	191.5	47.9	191.5	85.8	21.0	85.8	2.23	111.4	27.8	111.4	144.6
-3	187.5	46.9	187.5	85.6	21.0	85.6	2.19	107.5	26.9	107.5	144.4
-4	183.5	45.9	183.5	85.4	20.9	85.4	2.15	103.8	25.9	103.8	144.1
-5	179.6	44.9	179.6	85.3	20.9	85.3	2.11	100.0	25.0	100.0	143.8
-6	175.8	43.9	175.8	85.1	20.8	85.1	2.07	96.4	24.1	96.4	143.5
-7	172.0	43.0	172.0	84.8	20.8	84.8	2.03	92.7	23.2	92.7	143.1
-8	168.2	42.0	168.2	84.6	20.7	84.6	1.99	89.2	22.3	89.2	142.7
-9	164.4	41.1	164.4	84.3	20.7	84.3	1.95	85.7	21.4	85.7	142.3
-10	160.7	40.2	160.7	84.1	20.6	84.1	1.91	82.2	20.5	82.2	141.8
-11	157.0	39.3	157.0	83.8	20.5	83.8	1.87	78.8	19.7	78.8	141.3
-12	153.4	38.3	153.4	83.5	20.4	83.5	1.84	75.4	18.9	75.4	140.7
-13	149.7	37.4	149.7	83.1	20.4	83.1	1.80	72.1	18.0	72.1	140.1
-14	146.2	36.5	146.2	82.8	20.3	82.8	1.77	68.9	17.2	68.9	139.5
-15	142.6	35.6	142.6	82.4	20.2	82.4	1.73	65.7	16.4	65.7	138.8

-- attention: operating limits not reflected in performance table

WAMAK TBW 200 EVI HeavyDuty 2L2

Tc -OU		W 12 / 7 °C									
Ts -IN	Qc nom	Qc min	Qc max	Pin nom	Pin min	Pin max	EER	Qh nom	Qh min	Qh max	I nom
[°C]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	kW / kW	[kW]	[kW]	[kW]	[A]
40	140.8	35.2	140.8	58.0	14.2	58.0	2.43	195.0	48.7	195.0	111.0
39	141.8	35.5	141.8	56.7	13.9	56.7	2.50	194.8	48.7	194.8	109.5
38	142.8	35.7	142.8	55.4	13.6	55.4	2.58	194.6	48.6	194.6	108.0
37	143.7	35.9	143.7	54.2	13.3	54.2	2.65	194.4	48.6	194.4	106.6
36	144.6	36.2	144.6	53.0	13.0	53.0	2.73	194.1	48.5	194.1	105.2
35	145.5	36.4	145.5	51.8	12.7	51.8	2.81	193.9	48.5	193.9	103.9
34	146.4	36.6	146.4	50.7	12.4	50.7	2.89	193.7	48.4	193.7	102.6
33	147.2	36.8	147.2	49.6	12.1	49.6	2.97	193.5	48.4	193.5	101.4
32	148.0	37.0	148.0	48.5	11.9	48.5	3.05	193.3	48.3	193.3	100.1
31	148.8	37.2	148.8	47.4	11.6	47.4	3.14	193.1	48.3	193.1	98.9
30	149.6	37.4	149.6	46.4	11.4	46.4	3.22	192.9	48.2	192.9	97.8
29	150.3	37.6	150.3	45.4	11.1	45.4	3.31	192.7	48.2	192.7	96.6
28	151.0	37.7	151.0	44.4	10.9	44.4	3.40	192.4	48.1	192.4	95.5
27	151.7	37.9	151.7	43.4	10.6	43.4	3.49	192.2	48.1	192.2	94.4
26	152.3	38.1	152.3	42.5	10.4	42.5	3.59	192.0	48.0	192.0	93.3
25	152.9	38.2	152.9	41.5	10.2	41.5	3.68	191.7	47.9	191.7	92.2
24	153.6	38.4	153.6	40.6	9.9	40.6	3.78	191.5	47.9	191.5	91.2
23	154.1	38.5	154.1	39.7	9.7	39.7	3.88	191.2	47.8	191.2	90.2
22	154.7	38.7	154.7	38.8	9.5	38.8	3.98	191.0	47.7	191.0	89.1
21	155.2	38.8	155.2	38.0	9.3	38.0	4.09	190.7	47.7	190.7	88.1
20	155.7	38.9	155.7	37.1	9.1	37.1	4.20	190.4	47.6	190.4	87.1



Tc [°C]		W 23 / 18 °C									
0	Qc nom	Qc min	Qc max	Pin nom	Pin min	Pin max	EER	Qh nom	Qh min	Qh max	I nom
[°C]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	kW / kW	[kW]	[kW]	[kW]	[A]
40	187.8	46.9	187.8	58.0	14.2	58.0	3.24	241.8	60.4	242.0	110.9
39	189.0	47.3	189.0	56.7	13.9	56.7	3.33	241.8	60.5	241.9	109.3
38	190.2	47.6	190.2	55.4	13.6	55.4	3.43	241.9	60.5	241.9	107.8
37	191.4	47.9	191.4	54.2	13.3	54.2	3.53	241.9	60.5	241.8	106.3
36	192.6	48.1	192.6	53.0	13.0	53.0	3.63	241.9	60.5	241.8	104.9
35	193.7	48.4	193.7	51.8	12.7	51.8	3.74	242.0	60.5	241.8	103.5
34	194.8	48.7	194.8	50.7	12.4	50.7	3.84	242.0	60.5	241.8	102.1
33	195.9	49.0	195.9	49.6	12.1	49.6	3.95	242.1	60.5	241.8	100.8
32	196.9	49.2	196.9	48.5	11.9	48.5	4.06	242.1	60.5	241.8	99.5
31	198.0	49.5	198.0	47.4	11.6	47.4	4.17	242.2	60.5	241.8	98.2
30	199.0	49.7	199.0	46.4	11.4	46.4	4.29	242.2	60.6	241.8	96.9
29	200.0	50.0	200.0	45.4	11.1	45.4	4.41	242.3	60.6	241.8	95.7
28	200.9	50.2	200.9	44.4	10.9	44.4	4.53	242.3	60.6	241.9	94.5
27	201.8	50.5	201.8	43.4	10.6	43.4	4.65	242.4	60.6	241.9	93.3
26	202.7	50.7	202.7	42.5	10.4	42.5	4.77	242.4	60.6	241.9	92.1
25	203.6	50.9	203.6	41.5	10.2	41.5	4.90	242.5	60.6	242.0	90.9
24	204.5	51.1	204.5	40.6	9.9	40.6	5.03	242.5	60.6	242.0	89.8
23	205.3	51.3	205.3	39.7	9.7	39.7	5.17	242.5	60.6	242.1	88.7
22	206.1	51.5	206.1	38.8	9.5	38.8	5.31	242.6	60.6	242.1	87.5
21	206.9	51.7	206.9	38.0	9.3	38.0	5.45	242.6	60.6	242.2	86.4
20	207.7	51.9	207.7	37.1	9.1	37.1	5.60	242.6	60.6	242.2	85.3




-- attention: operating limits not reflected in performance table

LEGEND:




Ts-IN: Temperature renewable source - inlet [°C]
Th-OU: Temperature heating - outlet (flow) [°C]
Tc-OU: Temperature cooling - outlet (flow) [°C]
Qh nom: Heating capacity nominal
Qh min: Heating capacity minimal
Qh max: Heating capacity maximal
Pin nom: Power input at nominal heating capacity
Pin min: Power input at minimal heating capacity
Pin max: Power input at maximal heating capacity
COP nom: coefficient of performance at nominal heating capacity
Qc nom: cooling / heat extraction capacity at nominal heating capacity
Qc min: cooling / heat extraction at minimal heating capacity
Qc max: cooling / heat extraction at maximal heating capacity
I nom: Current at nominal heating capacity
EER: energy efficiency ratio at nominal cooling capacity



Operating limits

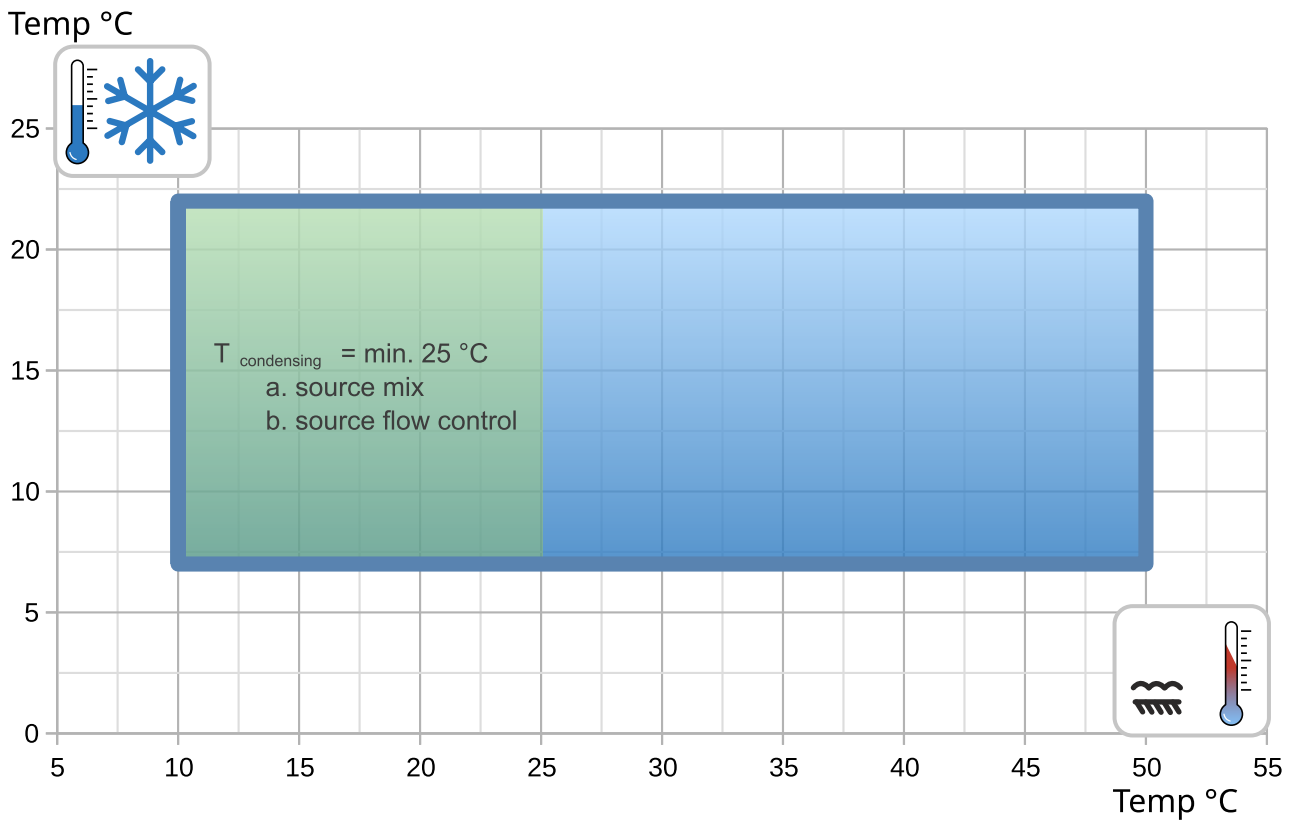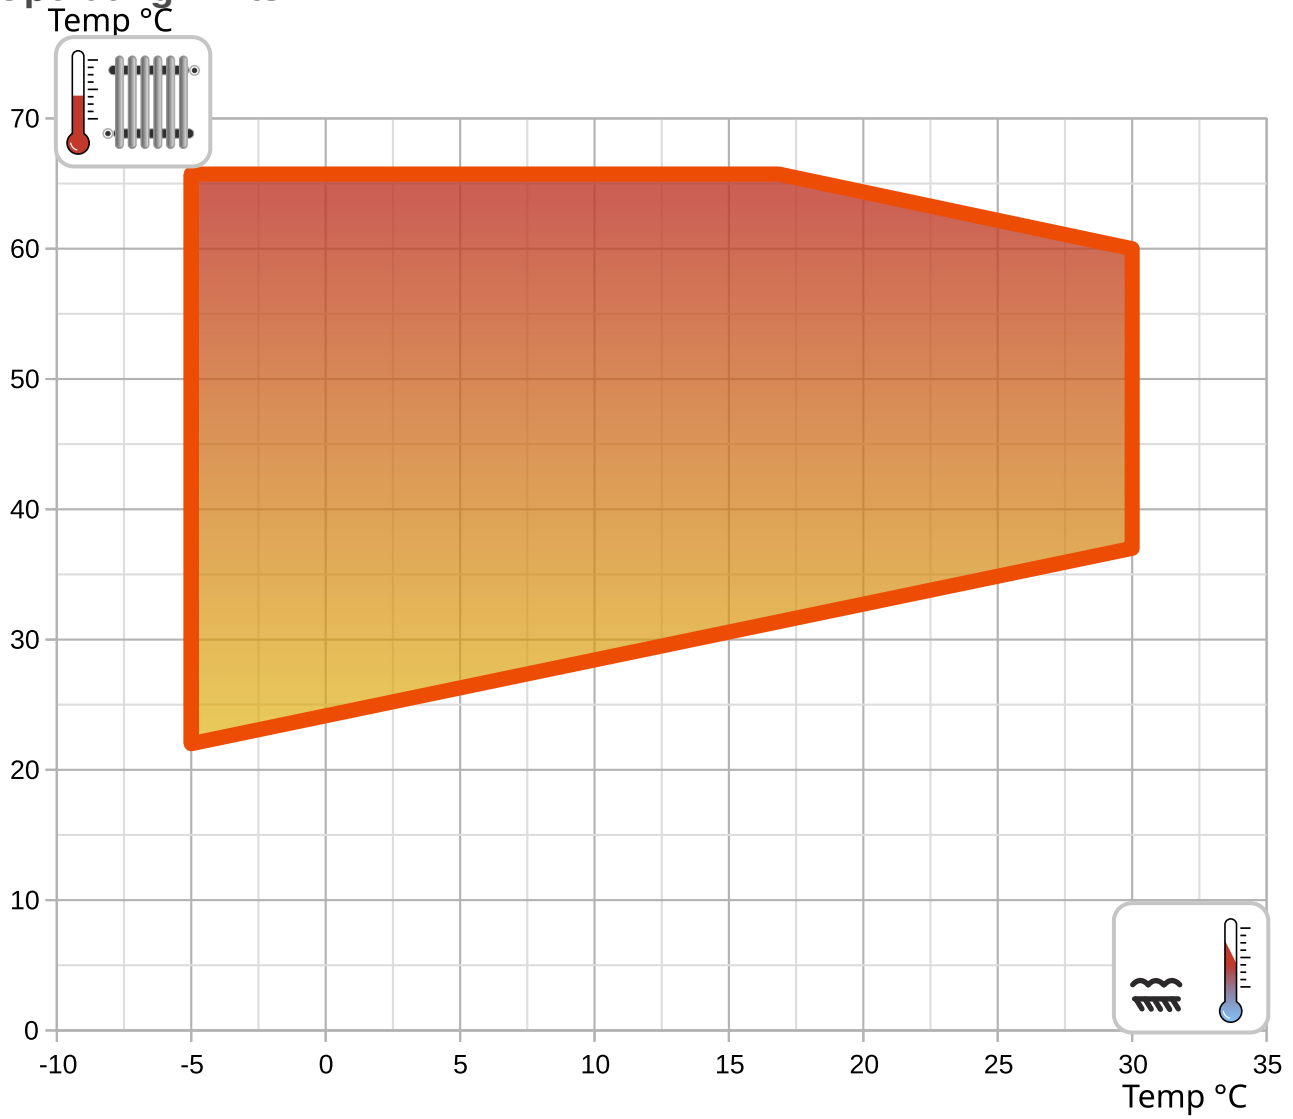


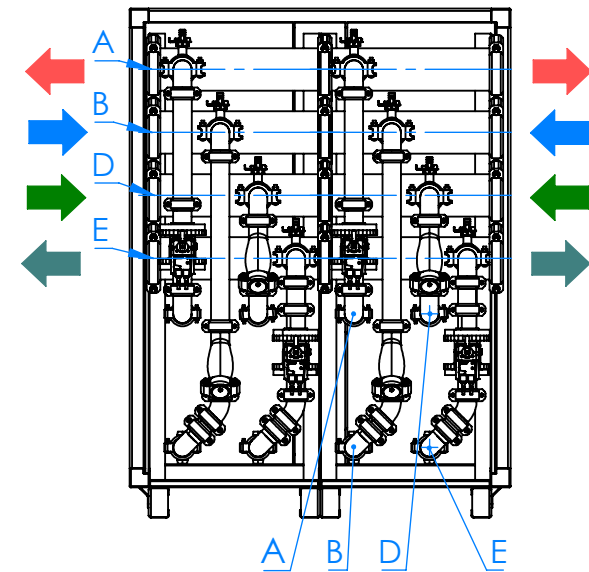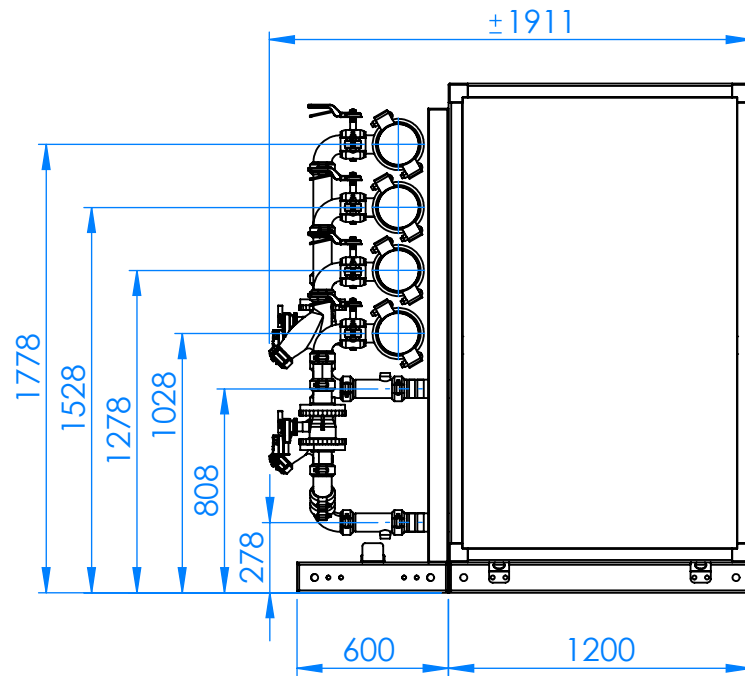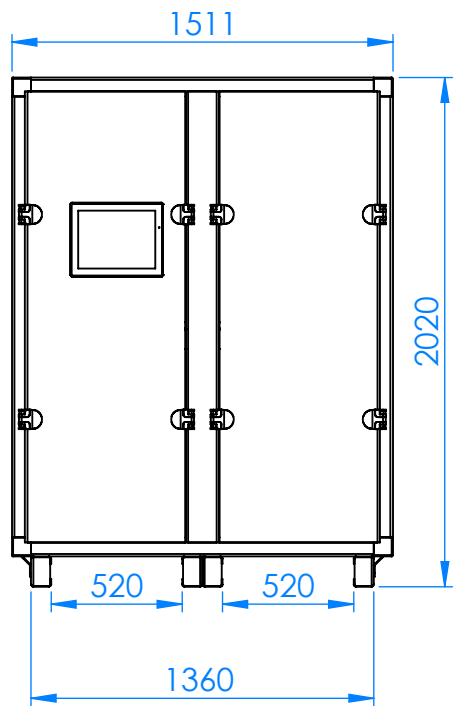


2xHD HD-M1

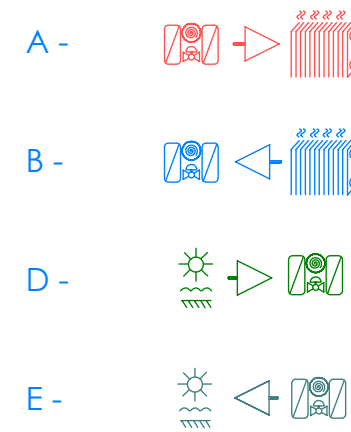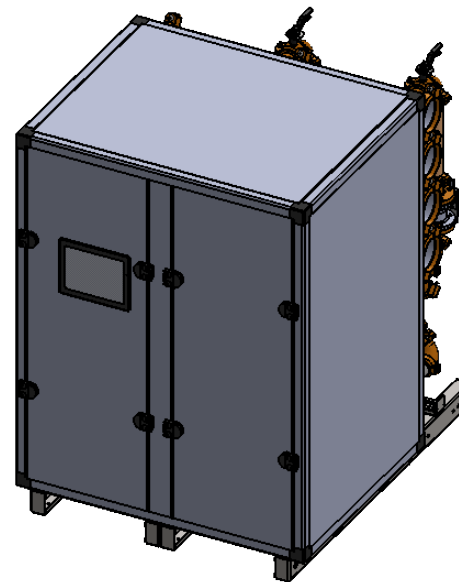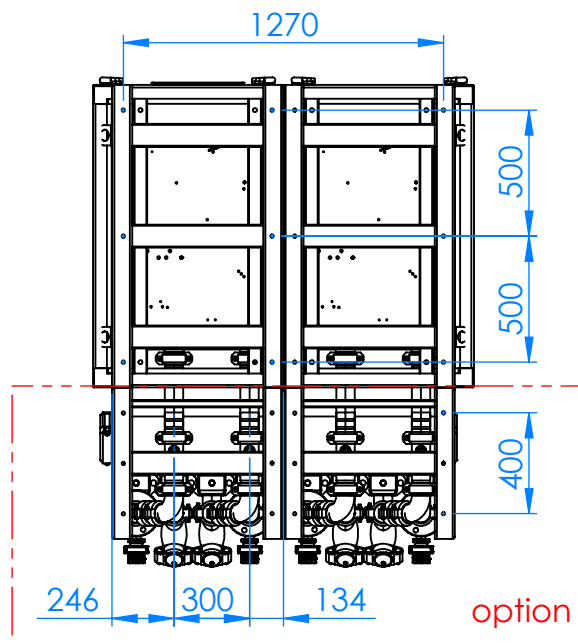

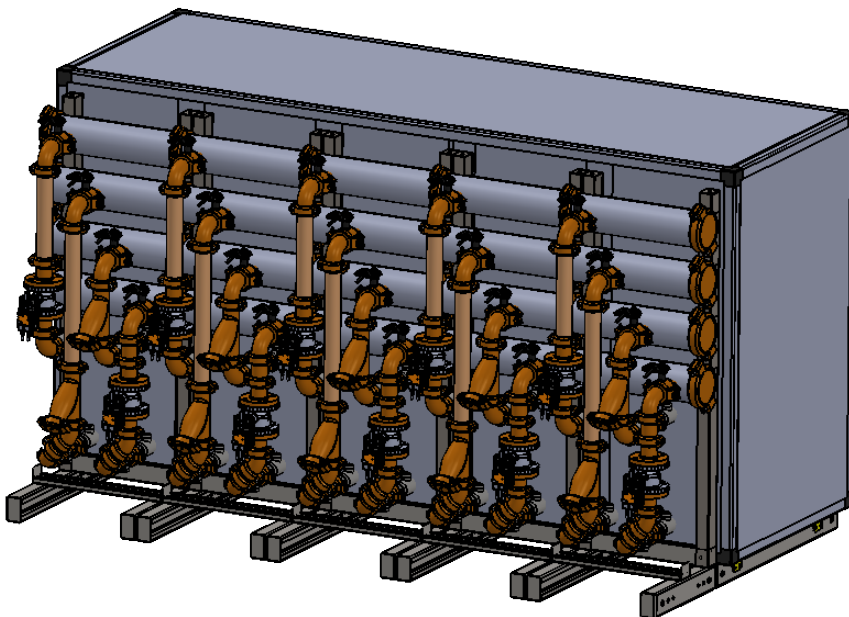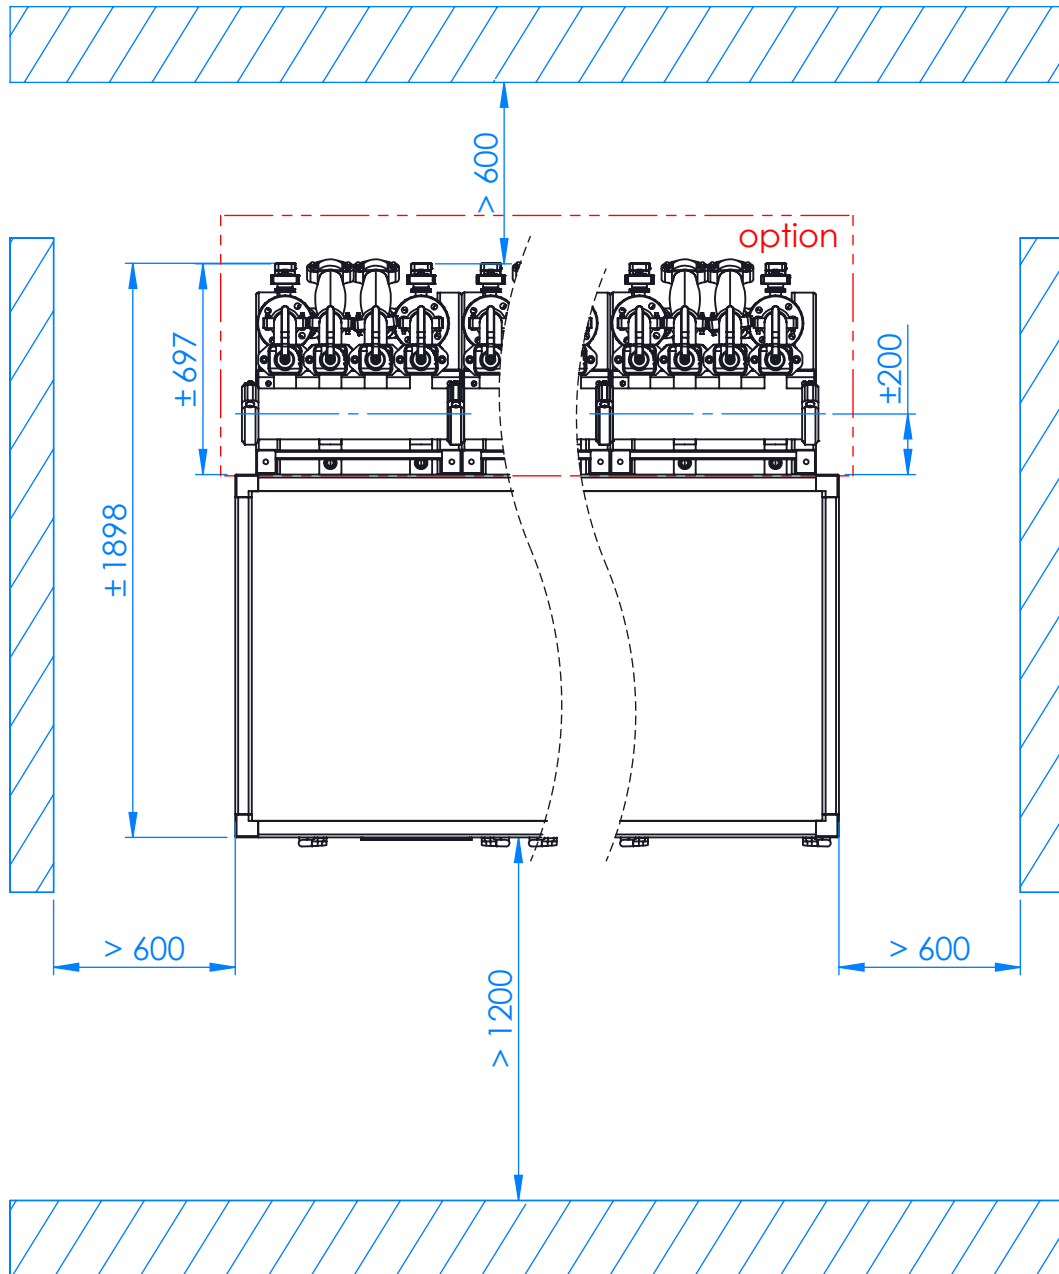

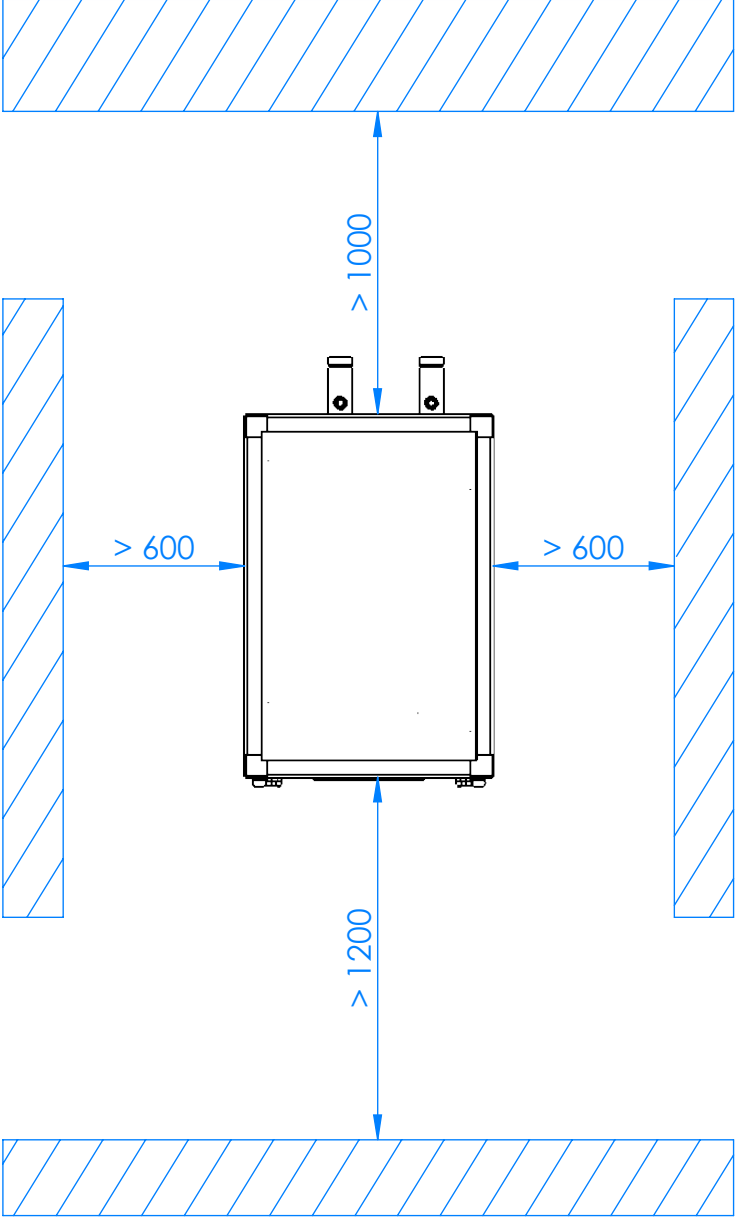

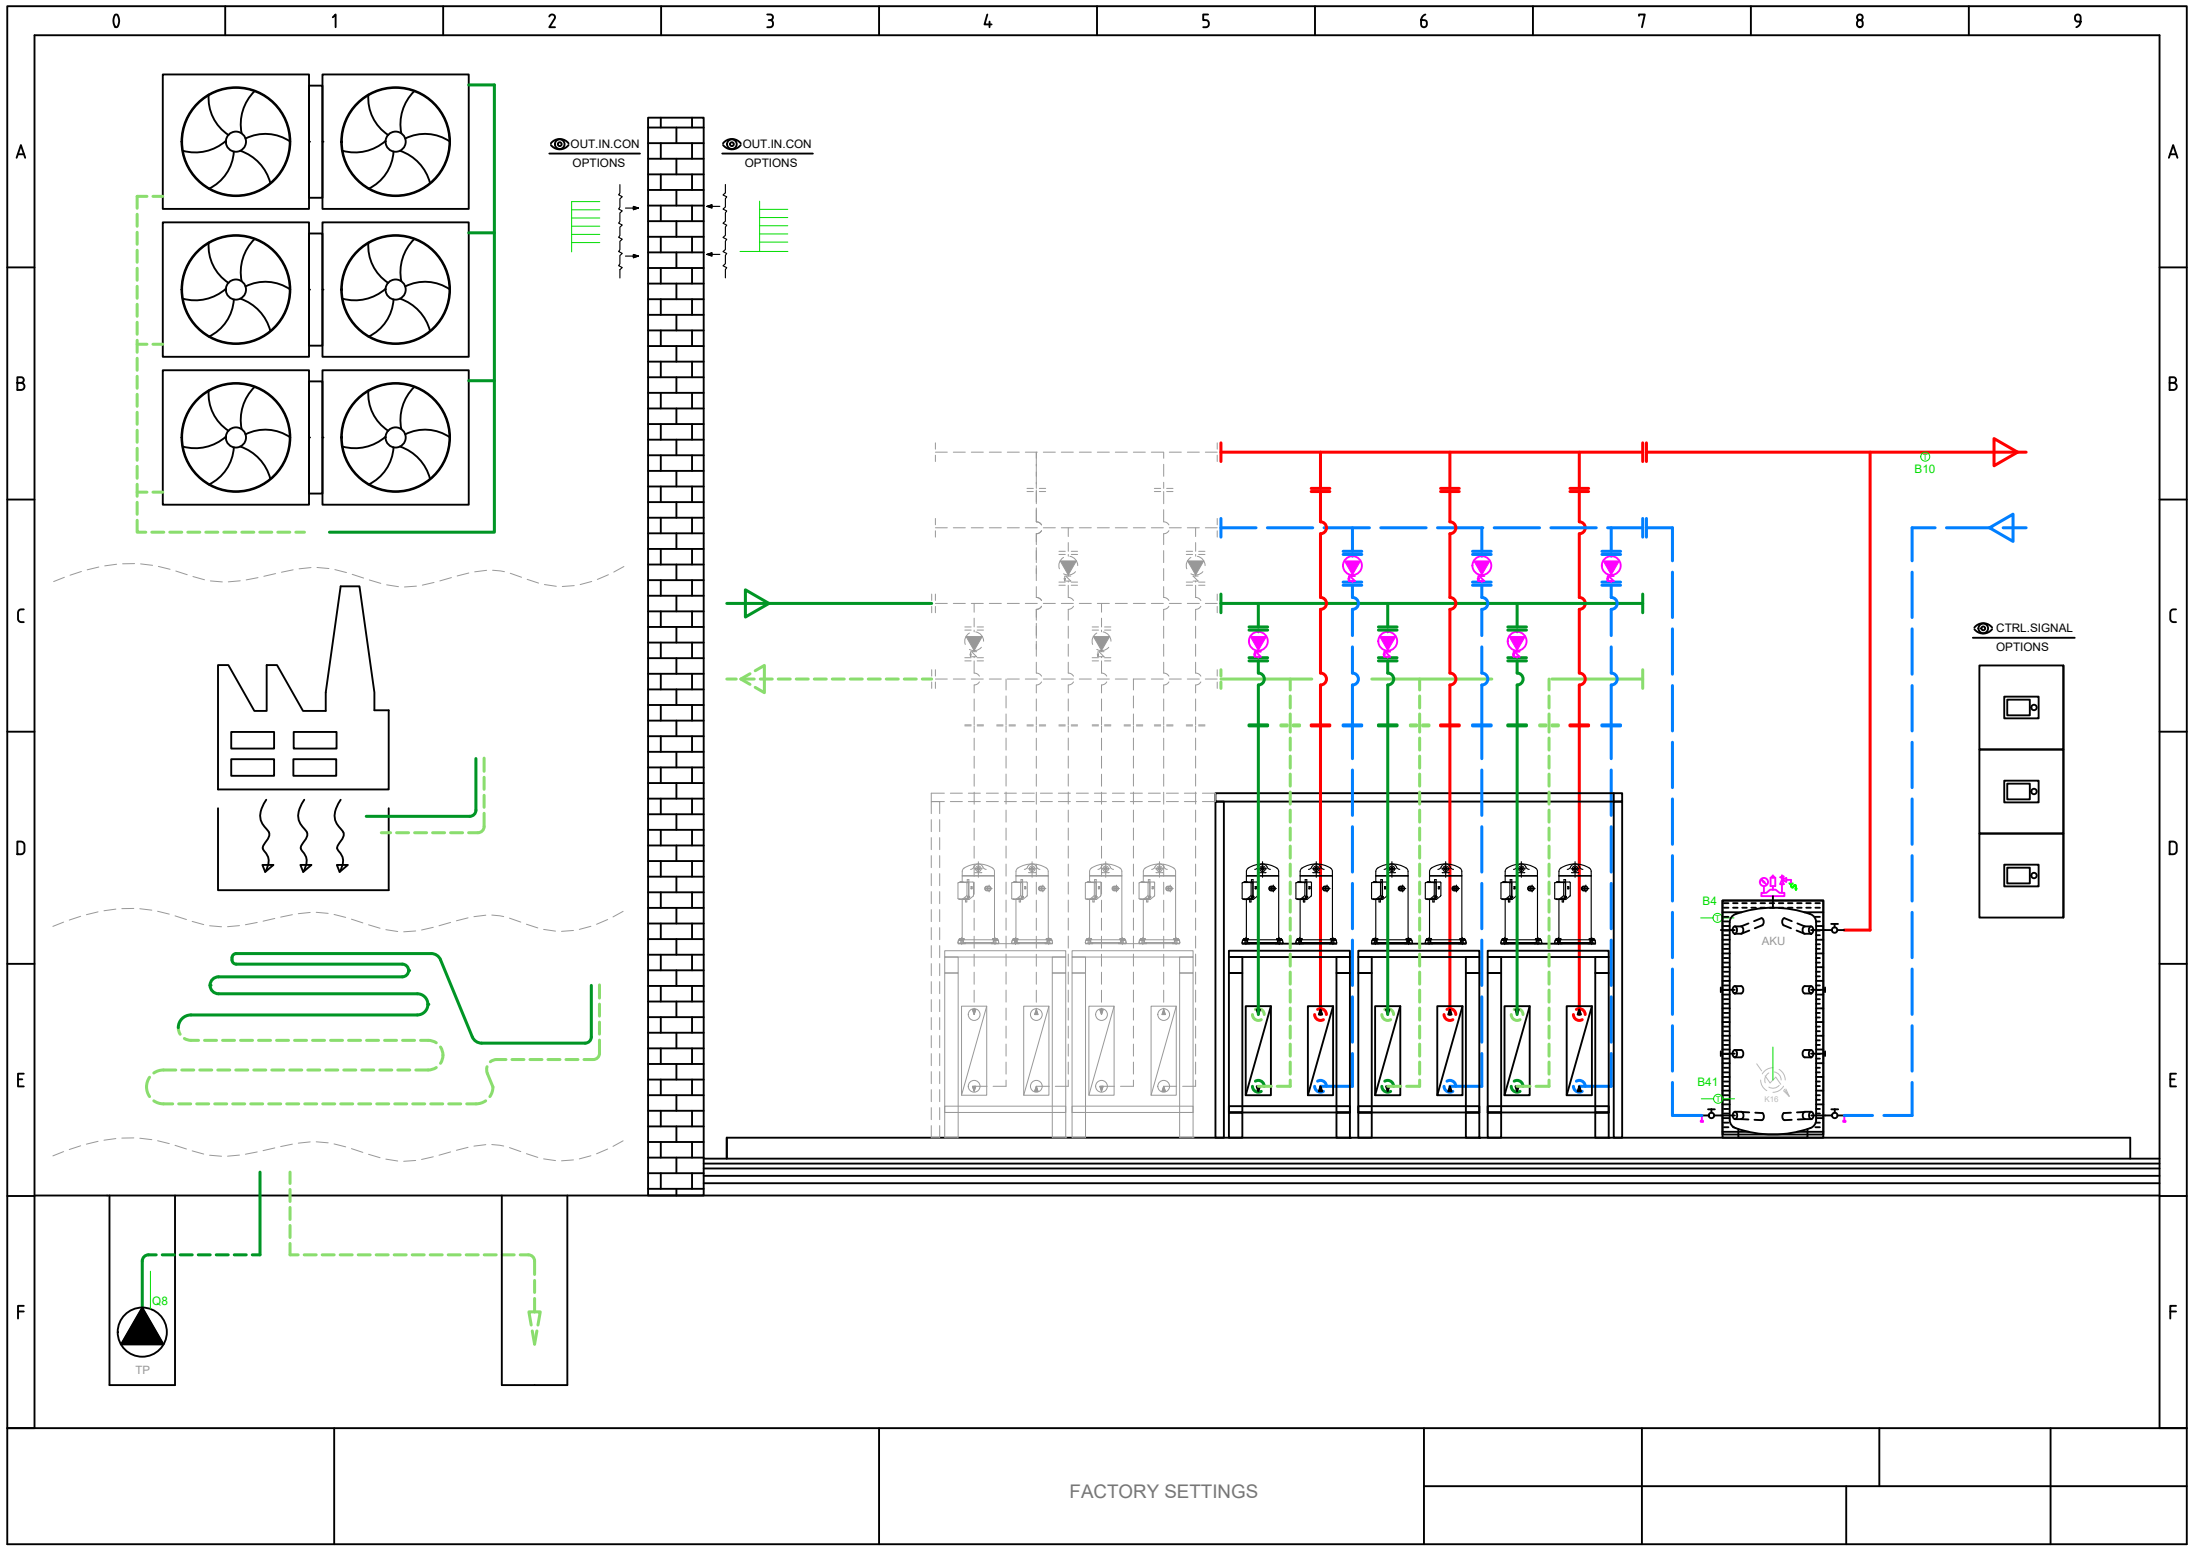

Total: max 6A
1 x QX...: max 2A

Main power supply 230V / 50 Hz
Ground
Neutral conductor

- E9 Low-pressure switch E9
- E10 High-pressure switch E10
- E15 Flow switch source E15
- E24 Flow switch consumers E24
- E6 Electrical utility lock E6
- E12 Overload compressor 2 E12
- E21 Mains supervision E21
- E22 Mains supervision E22
- E23 Mains supervision E23
- E11 Overload compressor 1 E11
- K1 Compressor stage 1 K1

Q8 Source pump Q8

Q9 Condenser pump Q9


K10 Alarm output K10

K40 Crankcase heater K40

K81 Valve evaporator K81

K82 Valve EVI K82


K2 Compressor stage 2 K2

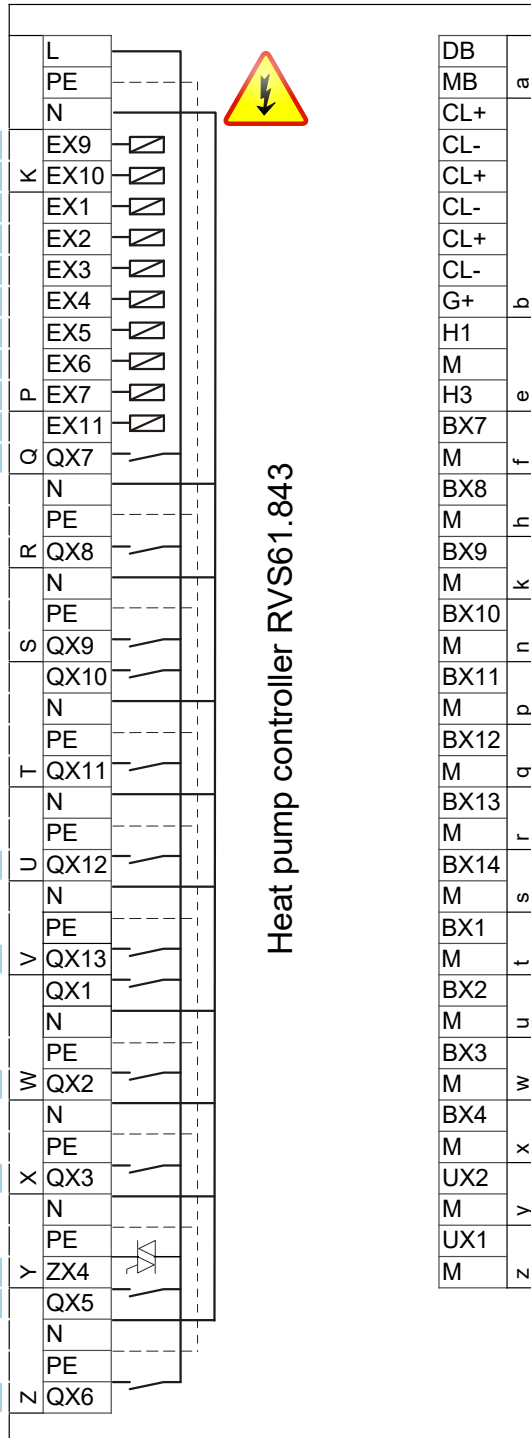

- DB LPB Bus data
- MB LPB Bus GND
- CL+ Room unit QAA...
- CL- Room unit QAA...
- CL+ Room unit QAA... 2.
- CL- Room unit QAA... 2.
- CL+ Room unit QAA... 3.
- CL- Room unit QAA... 3.
- G+ 12V supply → OUT
- H1
- M
- H3 Consumer request VK1
- BX7 B81 Hot-gas sensor K1 B81
- M
- BX8
- M
- BX9
- M
- BX10 B21 HP flow sensor B21
- M
- BX11
- M
- BX12 B71 HP return sensor B71
- M
- BX13 B91 Source inlet sensor B91
- M
- BX14 B84 Source outl sens B92/B84
- M
- BX1
- M
- BX2
- M
- BX3 B83 Refrig sensor liquid B83
- M
- BX4 B82 Hot-gas sensor K2 B82
- M
- UX2 Condenser pump Q9
- M
- UX1 0..10 V Signal
- M
- Z 0..10 V Signal




- AVS75.390
- AVS75.391
- AVS75.370






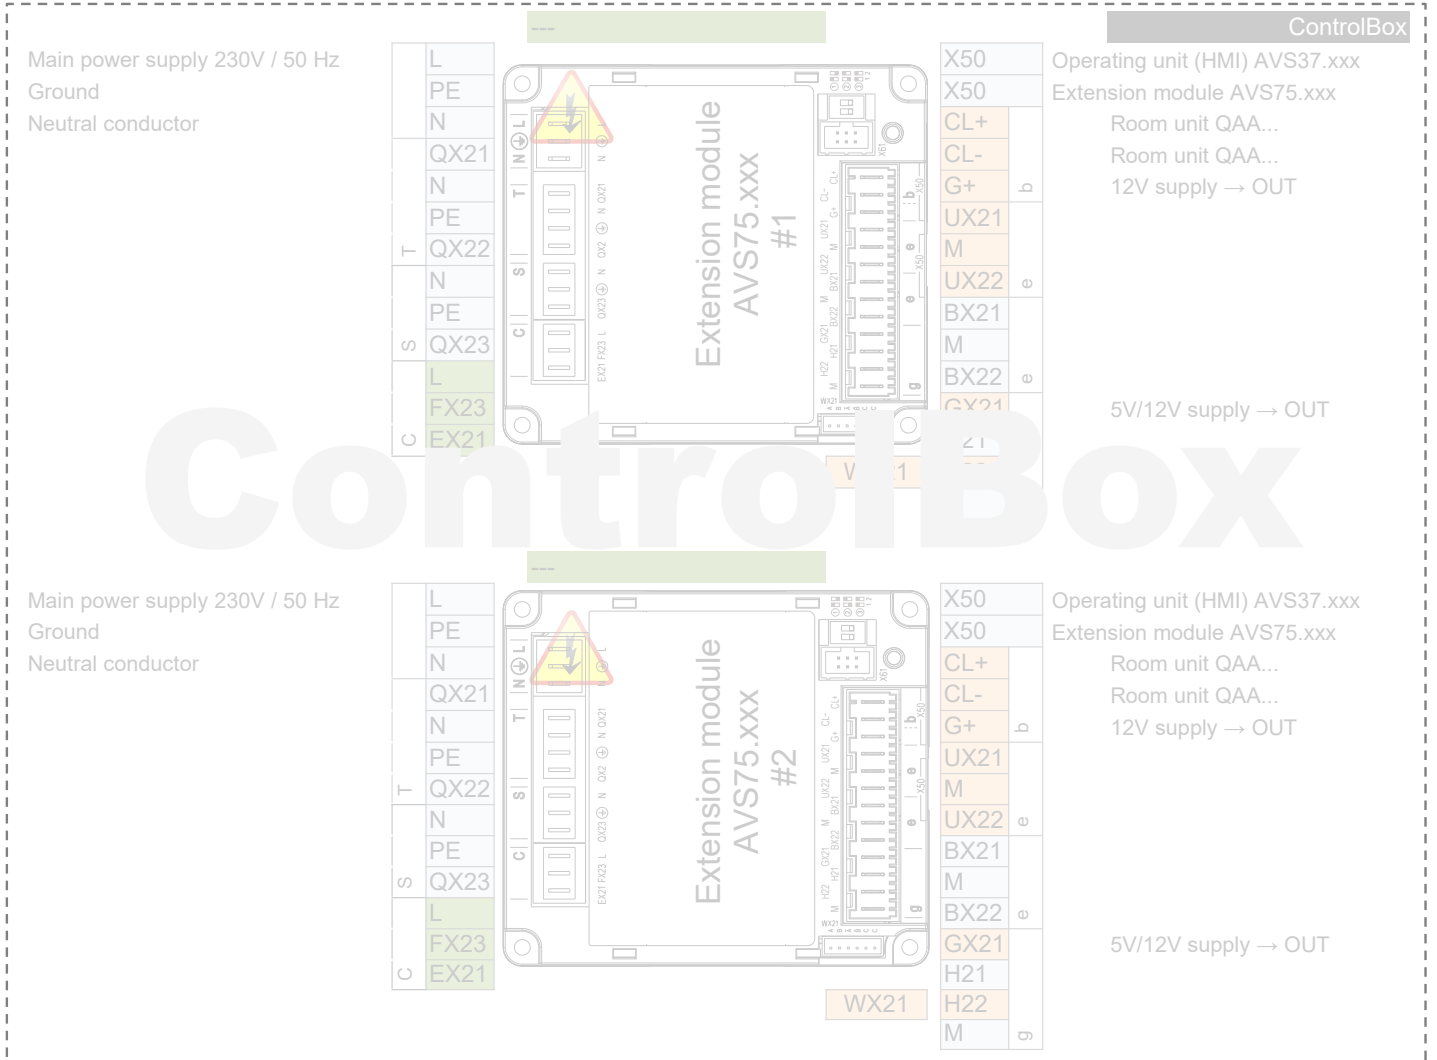


HEAT PUMP


EXTERNAL
INTERNAL




K1 K2 K82 K81 K40 K10 Q8 UX1 Q9 UX2





M-K1 MV-EVI-K1 Q1K M-K1 MV-EVI-K2 Q2K



0...10V




0...10V

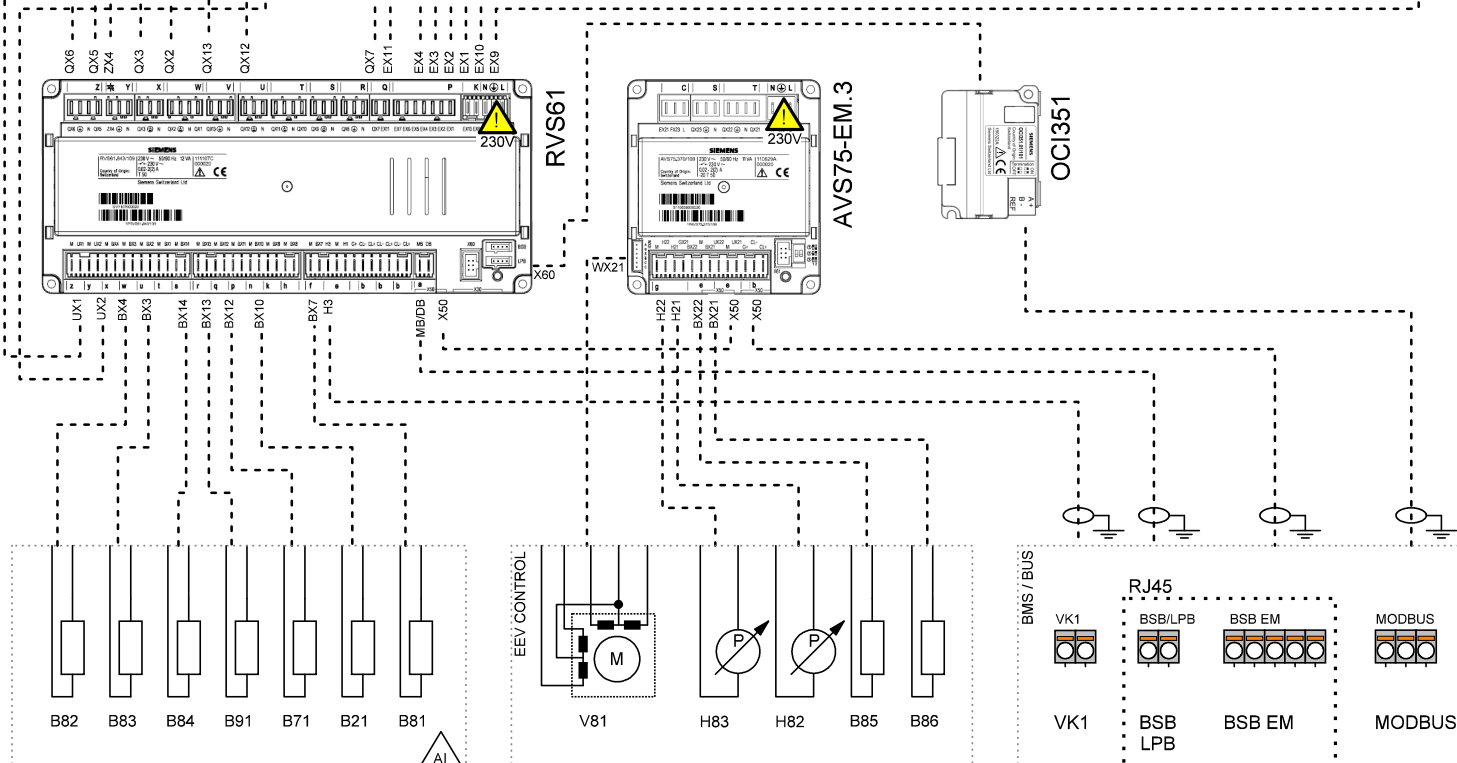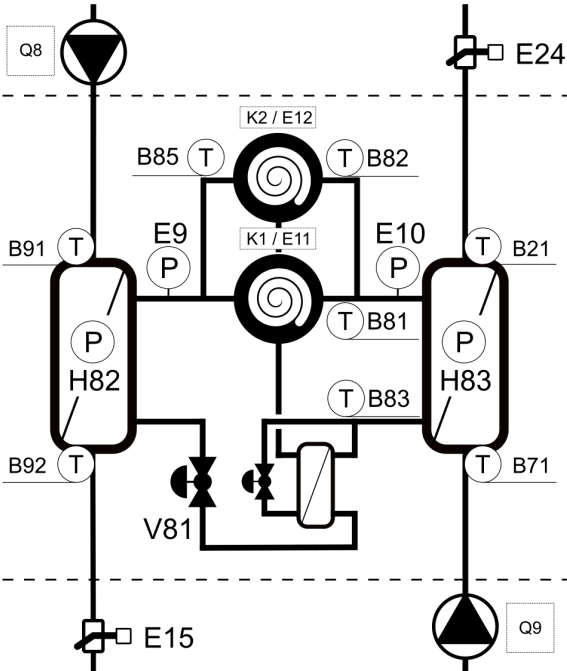

PWR SPLY: 3~ 400V, 50 Hz
CTRL: 1~ 230V, 50 HZ

Company	Title	Version / Note	Number	Created by	Date	Page
	TBW-TWW	05/2024				1

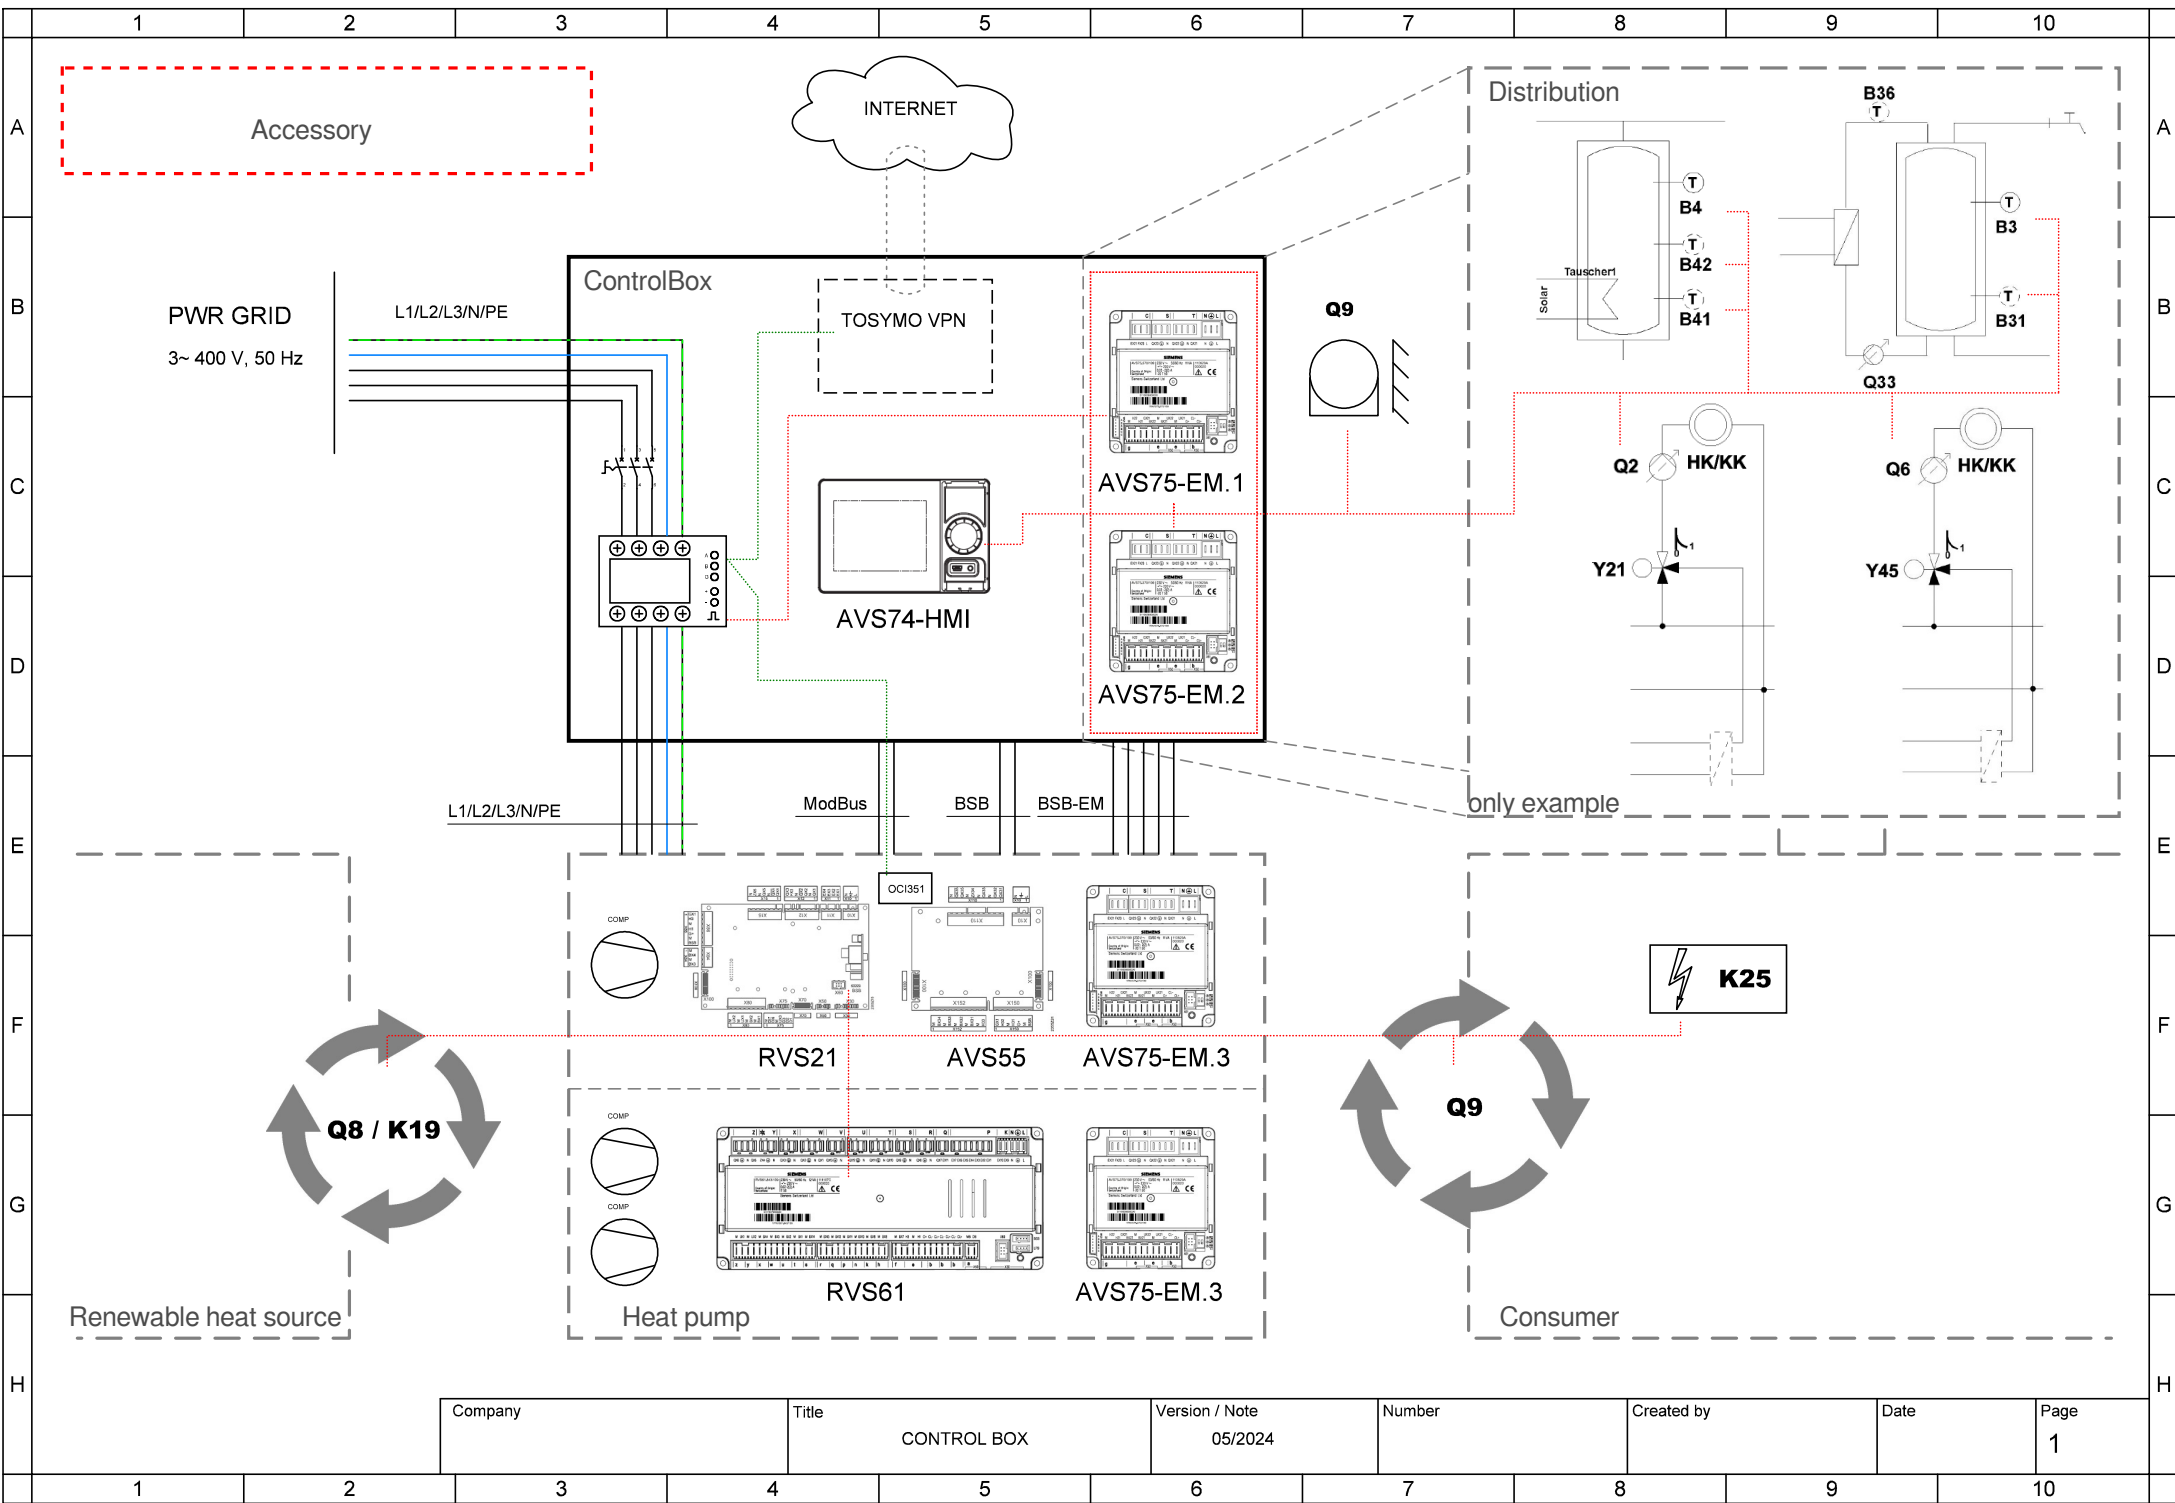

Company	Title	Version / Note	Number	Created by	Date	Page
	CONTROL BOX	05/2024				1



Company	Title	Version / Note	Number	Created by	Date	Page
	CONTROL BOX	05/2024				2



Company	Title	Version / Note	Number	Created by	Date	Page
	CONTROL BOX	05/2024				3



Company

Title

CONTROL BOX

Version / Note

05/2024

Number

Created by

Date

Page

4


- AVS75.390
- AVS75.391
- AVS75.370

- AVS75.370**
 Main power supply 230V / 50 Hz
 Ground
 Neutral conductor
Y1 Mixing valve Open

Y2 Mixing valve Close

Q2 Heat circuit pump HC1 Q2

L Phase 230V
E61 Smart grid E61

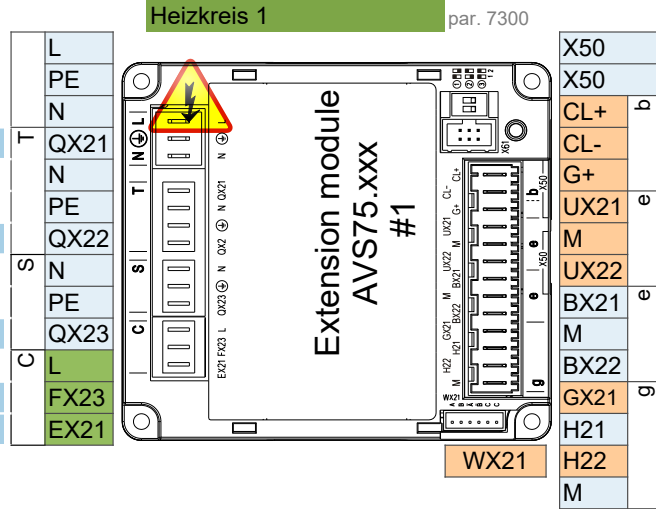

- Extension module AVS75.xxx
 Room unit QAA...
 Room unit QAA...

B1 Flow sensor 1


 Pulse count

- AVS75.370**
 Main power supply 230V / 50 Hz
 Ground
 Neutral conductor
Q3 DHW ctrl elem Q3

K6 El imm heater DHW K6

Q6 Heat circuit pump HC2 Q6

L Phase 230V
E62 Smart grid E62

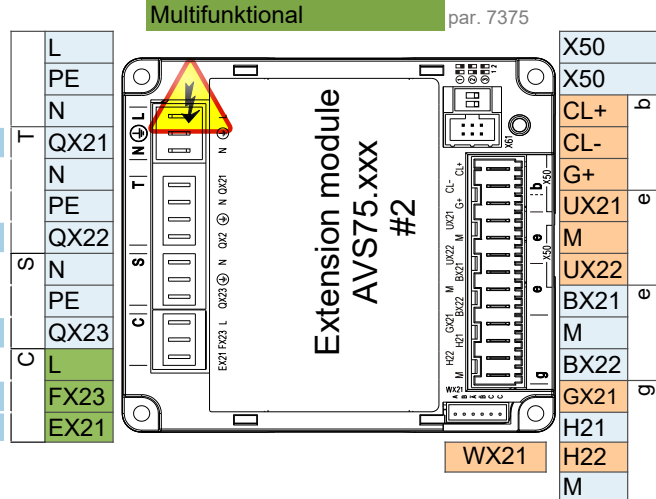


- Operating unit (HMI) AVS37.xxx
 Extension module AVS75.xxx
 Room unit QAA...
 Room unit QAA...

B3 DHW sensor B3

B4 Buffer sensor B4

- Main power supply 230V / 50 Hz
 Ground
 Neutral conductor

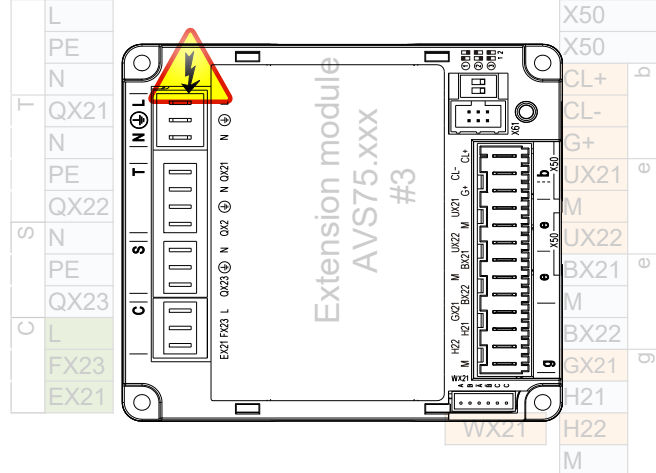

- Operating unit (HMI) AVS37.xxx
 Extension module AVS75.xxx
 Room unit QAA...
 Room unit QAA...

Attention: Extension module 3 is inside the heat pump

Control connection options

1 ControlBox

ControlBox, with two built-in extension modules, enables numerous options for application control on the consumer side behind the heat pump. For more, see the ControlBox schematic and the application diagrams sheet.

2 Fix flow temperature setpoint - On / Off dry (potential free) contact

2 wire shielded cable 2 x 0.5 mm² - Setpoint = 45°C (editable by param. 1859)

Connection terminal - see wiring diagram

3 Analog 0..10V flow temperature setpoint control

2 wire shielded cable 2 x 0.5 mm² - Setpoint: 0V = 16°C ~ 10V = 60°C (editable in parameter set)

Connection terminal - see wiring diagram

4 ModBus RTU communication command

3 wire shielded cable min. 3 x 0.25mm²

For ModBus mapping table contact technical support

5 MQTT IoT communication protocol

For more information contact technical support