

Basic performance data - WAMAK TBW 400 EVI HeavyDuty 2L4

Heating - EN 14511		
Heating capacity [kW]	B0 / W35 (max)	384.4 (48.1 / 384.4)
	B0 / W35 (min)	48.1 (48.1 / 384.4)
	B0 / W34	384.0 (48.0 / 384.0)
Electrical power input [kW]	B0 / W35 (max)	86.8 (10.6 / 86.8)
	B0 / W35 (min)	10.6 (10.6 / 86.8)
	B0 / W34	84.9 (10.4 / 84.9)
Heating efficiency faktor [COP]	B0 / W35 (max)	4.43
	B0 / W35 (min)	4.53
	B0 / W34	4.52
Seasonal space heating energy efficiency - SCOP EN 14825		
Average Climate / Low Temperature [35 °C]	SCOP	5.03
	η [%]	201.1
	Label	A+++
	Qhe [kWh]	157876.1
	Pdesignh [kW]	384.4
	Tbivalent [°C]	-10
Cooling		
Cooling capacity - [kW]	A35 / W23-18	387.4
	A25 / W23-18	407.2
	A35 / W12-7	387.4
	A25 / W12-7	387.4
Seasonal space cooling energy efficiency - SEER EN 14825		
[W 23 / 18 °C]	SEER	5.15
	Qce [kWh]	42700.8
	η_c [%]	205.8
Sound EN 12102		
Acoustic power - Lw	dB(A)	75.7
Acoustic pressure - Lp	1 m dB(A)	67.7
	5 m dB(A)	53.7
	10 m dB(A)	47.7
Mechanical and operational information		
Compressor type (3~ 400/50)	SCROLL / 8 /	On/Off
Refrigerant	R410A (GWP - 2088)	4 x 11.5 kg
Operating limit temperatures heating - (min / max) [°C]		25 / 65
Operating limit temperatures source - (min / max) [°C]		-10 (7) / 30
Weight		2480 kg

Main technical data - WAMAK TBW 400 EVI HeavyDuty 2L4

Enclosure type			HD2L4			Heat energy rejection side data		
Basic dimensions	Height [mm]	2000	Operating limit temperatures heating	MAX [°C]	65			
	Width [mm]	2800		MIN [°C]	25			
	Length [mm]	1200		for more see operating limits diagram				
Weight [kg]	2480		Condenser	Port size	4 x VIC 2.1/2 "			
Colour	Gray			Type	BPHE			
Enclosure IP Class	IP20			Count	4			
				Material	AISI 316			
Refrigeration cycle								
Compressor	Type	Scroll		Maximal operating pressure - refrigerant [bar]	50			
	Number of stages	8		Maximal operating pressure - Water [bar]	6			
	On/Off			Testing pressure [bar]	70			
	Power factor Cosφ	0.64		Heat transfer medium	Water			
	Winding resistance	0.76 Ohm		Volume flow @ dT 5K (nom) - Water [m3/h]	8.30 ~ 66.43			
Refrigerant		R410A		Internal pressure drop - Water [kPa]	4 x 20			
	Volme	4 x 11.5 kg		Temperature difference	@ 35°C (nom)	5 K		
	GWP	2088			@ 55°C	8 K		
	Safety class	A1			@ 65°C	10 K		
Refrigeration oil type	POE RL32-3MAF		Renewable energy extraction side data					
	Oil volume	8 x 3.38 L		Operating limit temperatures source	MIN [°C]	-10 (7)		
Maximal pressure - refrigerant [bar]	50			MAX [°C]	30			
	PED class	2		for more see operating limits diagram				
EVI - vapour injection with economizer								
Electrical connection data								
Line voltage [#~ V/Hz]	3~ 400/50		Evaporator	Port size	4 x VIC 2.1/2 "			
Current	nominal [A]	188.24		Type	BPHE			
	maximal [A]	299.20		Count	4			
	starting [A]	57.2	Material	AISI 316				
Softstart	-		Maximal operating pressure - refrigerant [bar]	29				
Main safety	C300		Heat transfer medium	Ethylenglykol				
Control System								
Main controller	SIEMENS	RVS 61	Brine proportion [%]	29				
Extension module	AVS75.3xx	AVS75.3xx	Antifreeze to [°C]	-15				
Bus Clip-In	LPB OCI346	Modbus OCI352	Maximal operating pressure - Ethylenglykol [bar]	6				
Online connection	Web server OZW672	ToSyMo	Volume flow - Ethylenglykol [m3/h]	8.48 ~ 67.82				
Superheat controller	SEC61		Internal pressure drop - Ethylenglykol [kPa]	4 x 20				
			Temperature difference - Ethylenglykol	4 K				

*** with accessory

WAMAK TBW 400 EVI HeavyDuty 2L4

ErP (EU) No 811/2013: Technical parameters for heat pump space heaters

Model	TBW 400 EVI HeavyDuty 2L4
Air-to-water heat pump	no
Brine-to-water heat pump	yes
Water-to-water heat pump	no
Low-temperature heat pump	no
Equipped with a supplementary heater	no
Heat pump combination heater	no
Temperature application	low (35°C - 30°C)
Climate conditions	average

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output at Tdesignh	Prated	384.4	kW	Seasonal space heating energy efficiency	η_s	201.1	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	384.0	kW	Tj = -7 °C	COPd	4.52	-
Tj = +2 °C	Pdh	381.9	kW	Tj = +2 °C	COPd	4.9	-
Tj = +7 °C	Pdh	380.2	kW	Tj = +7 °C	COPd	5.4	-
Tj = +12 °C	Pdh	378.2	kW	Tj = +12 °C	COPd	5.7	-
Tj = bivalent temperature	Pdh	384.4	kW	Tj = bivalent temperature	COPd	4.4	-
Tj = operation limit temperature	Pdh	---	kW	Tj = operation limit temperature	COPd	---	-
Bivalent temperature	Tbiv	-10	°C	Tj = operation limit temperature	TOL	---	°C
Power consumption in modes other than active mode				Heating water operating limit temperature	WTOL	65	°C
Off mode	Poff	0.010	kW	Supplementary heater			
Thermostat-off mode	Pto	0.010	kW	Rated heat output	Psup	74.1	kW
Standby mode	Psb	0.010	kW	Type of energy input	electricity		
Crankcase heater mode	Pck	0.000	kW	For air-to-water heat pumps:			
Other items				Rated air flow rate, outdoors	-	---	m ³ /h
Capacity control	multi-stage			For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger			
Sound power level							
indoors	Lwa	76	dB				
outdoors	Lwa	---	dB				
Annual energy consumption	Q _{HE}	157876.1	kWh				

Contact details: WAMAK, s.r.o., Orovnicna 252, 96652, Orovnicna, Slovakia, info@wamak.sk

WAMAK TBW 400 EVI HeavyDuty 2L4

ErP (EU) No 811/2013: Technical parameters for heat pump space heaters

Model	TBW 400 EVI HeavyDuty 2L4
Air-to-water heat pump	no
Brine-to-water heat pump	yes
Water-to-water heat pump	no
Low-temperature heat pump	no
Equipped with a supplementary heater	no
Heat pump combination heater	no
Temperature application	middle (55°C - 47°C)
Climate conditions	average

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output at Tdesignh	Prated	393.1	kW	Seasonal space heating energy efficiency	η_s	160.8	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7 °C	Pdh	395.5	kW	Tj = -7 °C	COPd	3.29	-
Tj = +2 °C	Pdh	395.7	kW	Tj = +2 °C	COPd	4.1	-
Tj = +7 °C	Pdh	388.8	kW	Tj = +7 °C	COPd	4.6	-
Tj = +12 °C	Pdh	386.6	kW	Tj = +12 °C	COPd	5.0	-
Tj = bivalent temperature	Pdh	393.1	kW	Tj = bivalent temperature	COPd	2.9	-
Tj = operation limit temperature	Pdh	---	kW	Tj = operation limit temperature	COPd	---	-
Bivalent temperature	Tbiv	-10	°C	Tj = operation limit temperature	TOL	---	°C
Power consumption in modes other than active mode				Heating water operating limit temperature	WTOL	65	°C
Off mode	Poff	0.010	kW	Supplementary heater			
Thermostat-off mode	Pto	0.010	kW	Rated heat output	Psup	74.1	kW
Standby mode	Psb	0.010	kW	Type of energy input	electricity		
Crankcase heater mode	Pck	0.000	kW	For air-to-water heat pumps:			
Other items				Rated air flow rate, outdoors	-	---	m ³ /h
Capacity control	multi-stage			For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger			
Sound power level							
indoors	Lwa	76	dB				
outdoors	Lwa	---	dB				
Annual energy consumption	Q _{HE}	201891.3	kWh				

Contact details: WAMAK, s.r.o., Orovnic 252, 96652, Orovnic, Slovakia, info@wamak.sk



ENERG Y IIA
 енергия - ενεργεια IE IA



TBW 400 EVI
 HeavyDuty 2L4



55 °C

35 °C



A+++

A+++



76 dB



--- dB

■ 413	■ 393
■ 394	■ 385
■ 386	■ 366
kW	kW



2019

811/2013

TBW 400 EVI
 HeavyDuty 2L4

ErP Data

	55 °C	35 °C
Energy class	A+++	A+++
η [%]	160.8	201.1
P_{rated} [kW]	394	385
Q_{HE} [kWh/y]	201892	157877
SCOP [-]	4.02	5.03
$T_{bivalent}$ [°C]	-10	-10

CONTROLLER



+ QAA55/75 class VII 3.5% ↓
 - QAA55/75 class III 1.5% ↓

Heating performance data

Version: v2024.010-BW-WW

Source - Brine [0°C] / Low Temperature [35°C]

ZHI46K1P-TWD_R410A_8_BWW

Operating conditions		Qh	P	COP
1	B0 / W30-35	384.4	86.8	4.43
2	B0 / W30-35 (MIN)	48.1	10.6	4.53
A	B0 / Wxx-34	384.0	84.9	4.52
B	B0 / Wxx-30	381.9	77.7	4.92
C	B0 / Wxx-27	47.5	8.8	5.37
D	B0 / Wxx-24	47.3	8.2	5.73
E	B0 / Wxx-35	384.4	86.8	4.43
F	B0 / Wxx-35	384.4	86.8	4.43

SCOP DATA EN 14825:2018	
Source - Brine [0°C] / Low Temperature [35°C]	
SCOPon	5.03
SCOPnet	5.03
SCOP	5.03
η [%]	201.13
Label	A+++
Qh [kWh]	157876
Pdesignh [kW]	384.4
Tbivalent [°C]	-10

Source - Brine [0°C] / Medium Temperature [55°C]

Operating conditions		Qh	P	COP
1	B0 / W47-55	393.1	136.1	2.89
2	B0 / W47-55 (MIN)	49.1	16.5	2.96
A	B0 / Wxx-52	395.5	124.2	3.29
B	B0 / Wxx-42	395.7	97.0	4.13
C	B0 / Wxx-36	48.6	10.5	4.64
D	B0 / Wxx-30	48.3	9.5	5.10
E	B0 / Wxx-55	393.1	136.1	2.89
F	B0 / Wxx-54	396.0	127.1	3.12

SCOP DATA EN 14825:2018	
Source - Brine [0°C] / Medium Temperature [55°C]	
SCOPon	4.02
SCOPnet	4.02
SCOP	4.02
η [%]	160.85
Label	A+++
Qh [kWh]	201891
Pdesignh [kW]	393.1
Tbivalent [°C]	-10

Source - Water [10°C] / Low Temperature [35°C]

Operating conditions		Qh	P	COP
1	W10 / W30-35	484.8	86.8	5.58
2	W10 / W30-35 (MIN)	60.6	10.6	5.72
A	W10 / Wxx-34	484.8	85.0	5.70
B	W10 / Wxx-30	485.1	78.1	6.21
C	W10 / Wxx-27	485.2	73.2	6.79
D	W10 / Wxx-24	485.1	68.7	7.24
E	W10 / Wxx-35	484.8	86.8	5.58
F	W10 / Wxx-35	484.8	86.8	5.58

SCOP DATA EN 14825:2018	
Source - Water [10°C] / Low Temperature [35°C]	
SCOPon	6.35
SCOPnet	6.35
SCOP	6.35
η [%]	254.06
Label	A+++
Qh [kWh]	157627
Pdesignh [kW]	484.8
Tbivalent [°C]	-10.00

WAMAK TBW 400 EVI HeavyDuty 2L4

Source - Water [10°C] / Medium Temperature [55°C]

Operating conditions	Qh	P	COP
1 W10 / W47-55	483.6	136.1	3.55
2 W10 / W47-55 (MIN)	60.5	16.6	3.64
A W10 / Wxx-52	488.5	123.9	3.94
B W10 / Wxx-42	489.6	96.7	5.06
C W10 / Wxx-36	490.3	85.9	5.85
D W10 / Wxx-30	490.8	78.1	6.44
E W10 / Wxx-55	483.6	136.1	3.55
F W10 / Wxx-55	483.6	136.1	3.55

SCOP DATA EN 14825:2018	
Source - Water [10°C] / Medium Temperature [55°C]	
SCOPon	4.93
SCOPnet	4.93
SCOP	4.93
η [%]	197.19
Label	A+++
Qh [kWh]	202591
Pdesignh [kW]	483.6
Tbivalent [°C]	-10.00

Low temperature cooling W 12 / 7°C

Operating conditions	Qc	P	EER
A W30-35 / W12-7	299.1	92.8	3.22
B W26-xx / W12-7	304.6	84.9	3.59
C W22-xx / W12-7	309.4	77.7	3.98
D W18-xx / W12-7	311.5	74.2	4.20

SEER DATA EN 14825:2018 [W 12 / 7°C]	
SEERon	3.86
SEER	3.86
Qc [kWh]	174600
η [%]	154.51

Radiant cooling W 23 / 18°C

Operating conditions	Qc	P	EER
A W50-xx / W23-18	347.5	145.9	2.38
B W40-xx / W23-18	375.5	116.0	3.24
C W30-35 / W23-18	398.0	92.8	4.29
D W26-xx / W23-18	405.5	84.9	4.77


SEER DATA EN 14825:2018 [W 23 / 18°C]	
SEERon	5.15
SEER	5.15
Qc [kWh]	174600
η [%]	205.81

WAMAK TBW 400 EVI HeavyDuty 2L4

ZHI46K1P-TWD_R410A_8_BWW


Performance lines - heating

- Qh-nom-35
- Qh-min-35
- Qh-max-65
- Qh-nom-45
- Qh-nom-55
- Qh-nom-65

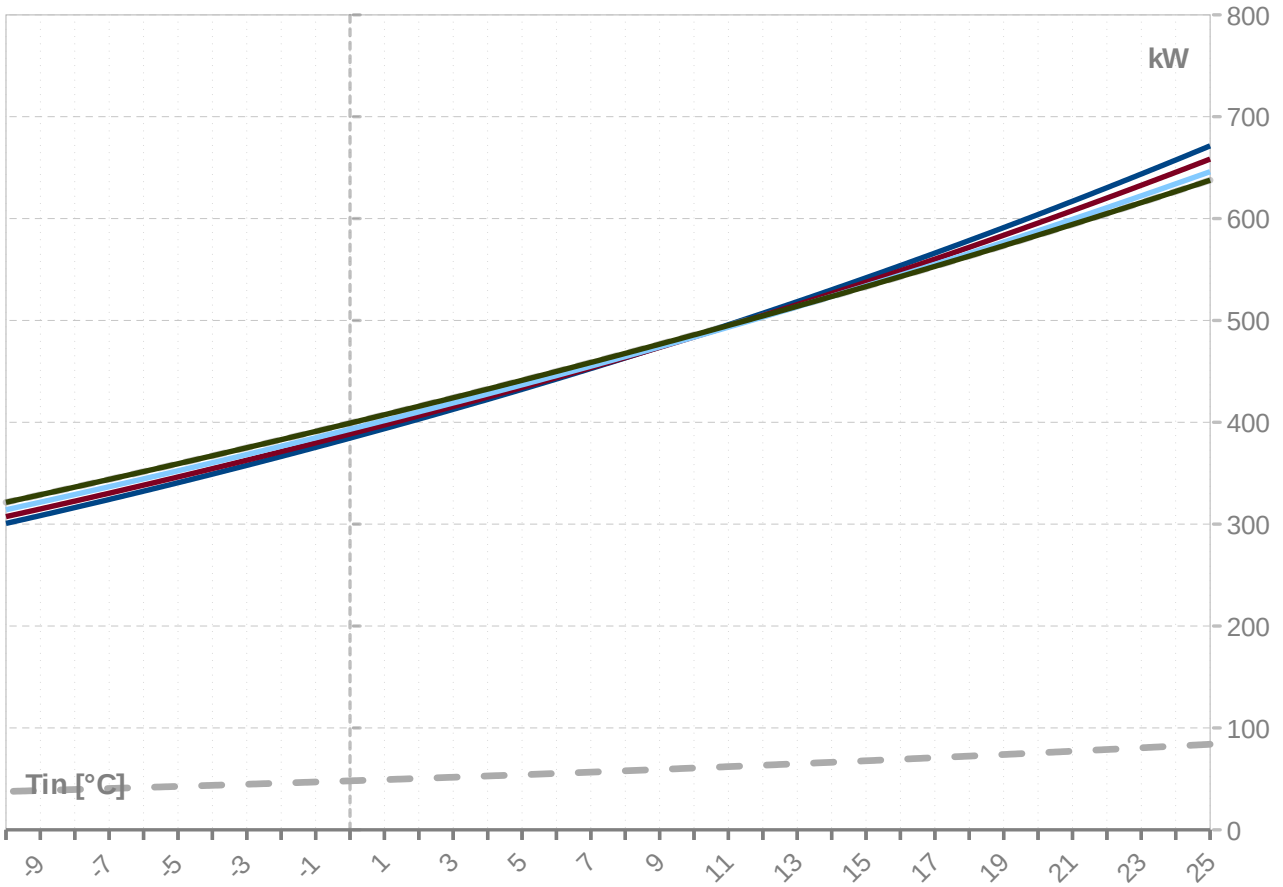

Performance lines - cooling

- Qc-nom-12-7
- Qc-nom-23-18

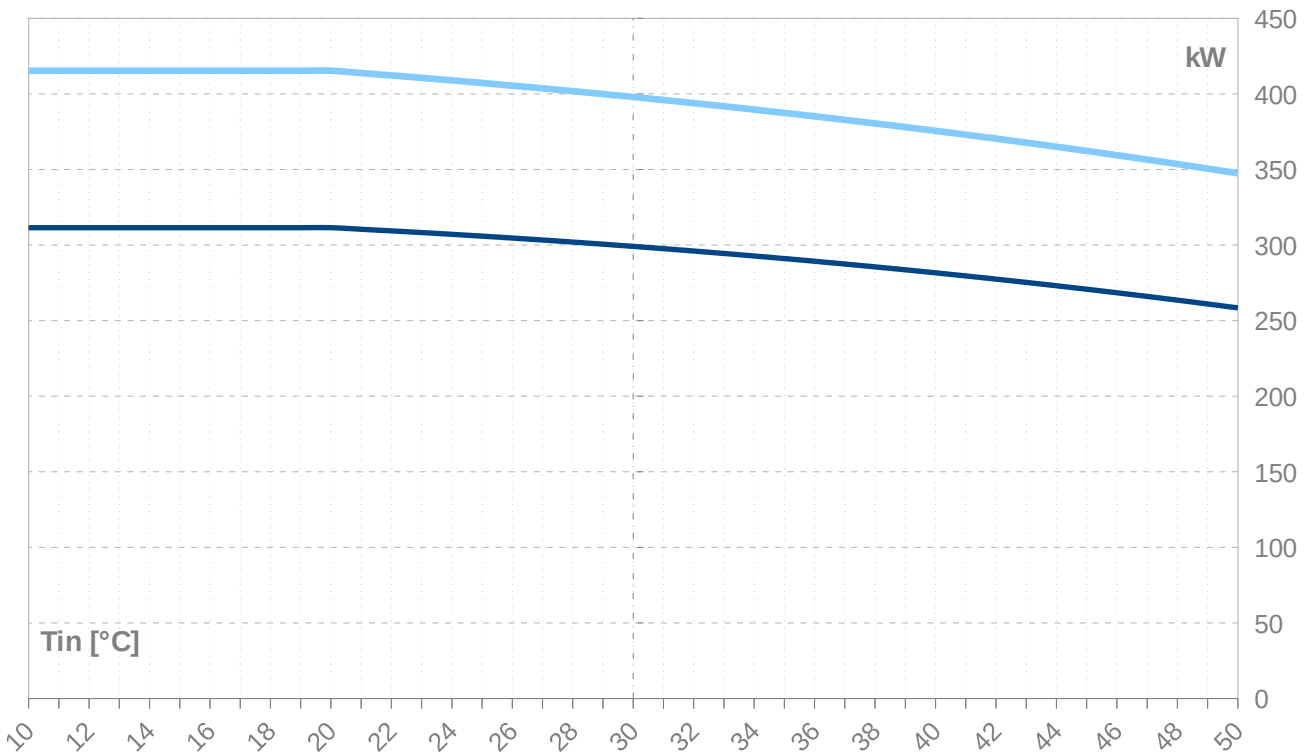

WAMAK TBW 400 EVI HeavyDuty 2L4

Th -OU	35										
Ts -IN [°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin min [kW]	Pin max [kW]	COP nom kW / kW	Qc nom [kW]	Qc min [kW]	Qc max [kW]	I nom [A]
25	671.4	83.9	671.4	88.5	10.8	88.5	7.59	588.7	73.6	588.7	187.2
24	657.4	82.2	657.4	88.2	10.8	88.2	7.45	575.0	71.9	575.0	186.9
23	643.7	80.5	643.7	88.0	10.7	88.0	7.31	561.5	70.2	561.5	186.6
22	630.3	78.8	630.3	87.8	10.7	87.8	7.18	548.2	68.5	548.2	186.4
21	617.0	77.1	617.0	87.7	10.7	87.7	7.04	535.1	66.9	535.1	186.2
20	604.0	75.5	604.0	87.5	10.7	87.5	6.90	522.2	65.3	522.2	186.0
19	591.1	73.9	591.1	87.4	10.7	87.4	6.76	509.5	63.7	509.5	185.9
18	578.5	72.3	578.5	87.3	10.6	87.3	6.63	497.0	62.1	497.0	185.9
17	566.1	70.8	566.1	87.2	10.6	87.2	6.49	484.7	60.6	484.7	185.9
16	553.9	69.2	553.9	87.1	10.6	87.1	6.36	472.5	59.1	472.5	185.9
15	541.9	67.7	541.9	87.0	10.6	87.0	6.23	460.6	57.6	460.6	185.9
14	530.0	66.3	530.0	87.0	10.6	87.0	6.10	448.8	56.1	448.8	186.0
13	518.4	64.8	518.4	86.9	10.6	86.9	5.96	437.3	54.7	437.3	186.1
12	507.0	63.4	507.0	86.9	10.6	86.9	5.84	425.9	53.2	425.9	186.3
11	495.8	62.0	495.8	86.9	10.6	86.9	5.71	414.7	51.8	414.7	186.4
10	484.8	60.6	484.8	86.8	10.6	86.8	5.58	403.7	50.5	403.7	186.6
9	473.9	59.2	473.9	86.8	10.6	86.8	5.46	392.8	49.1	392.8	186.8
8	463.3	57.9	463.3	86.8	10.6	86.8	5.34	382.2	47.8	382.2	187.0
7	452.8	56.6	452.8	86.8	10.6	86.8	5.22	371.7	46.5	371.7	187.2
6	442.5	55.3	442.5	86.8	10.6	86.8	5.10	361.4	45.2	361.4	187.4
5	432.4	54.0	432.4	86.8	10.6	86.8	4.98	351.3	43.9	351.3	187.7
4	422.4	52.8	422.4	86.8	10.6	86.8	4.87	341.4	42.7	341.4	187.9
3	412.7	51.6	412.7	86.8	10.6	86.8	4.75	331.6	41.4	331.6	188.1
2	403.1	50.4	403.1	86.8	10.6	86.8	4.64	322.0	40.3	322.0	188.3
1	393.7	49.2	393.7	86.8	10.6	86.8	4.53	312.6	39.1	312.6	188.6
0	384.4	48.1	384.4	86.8	10.6	86.8	4.43	303.3	37.9	303.3	188.8
-1	375.4	46.9	375.4	86.8	10.6	86.8	4.32	294.3	36.8	294.3	189.0
-2	366.4	45.8	366.4	86.8	10.6	86.8	4.22	285.3	35.7	285.3	189.2
-3	357.7	44.7	357.7	86.8	10.6	86.8	4.12	276.6	34.6	276.6	189.4
-4	349.1	43.6	349.1	86.8	10.6	86.8	4.02	268.0	33.5	268.0	189.5
-5	340.6	42.6	340.6	86.8	10.6	86.8	3.93	259.6	32.5	259.6	189.7
-6	332.4	41.5	332.4	86.7	10.6	86.7	3.83	251.4	31.4	251.4	189.8
-7	324.2	40.5	324.2	86.7	10.6	86.7	3.74	243.3	30.4	243.3	189.9
-8	316.2	39.5	316.2	86.6	10.6	86.6	3.65	235.3	29.4	235.3	190.0
-9	308.4	38.6	308.4	86.6	10.6	86.6	3.56	227.6	28.4	227.6	190.0
-10	300.7	37.6	300.7	86.5	10.6	86.5	3.48	220.0	27.5	220.0	190.0
-11	293.2	36.6	293.2	86.4	10.5	86.4	3.39	212.5	26.6	212.5	189.9
-12	285.8	35.7	285.8	86.2	10.5	86.2	3.31	205.2	25.7	205.2	189.9
-13	278.5	34.8	278.5	86.1	10.5	86.1	3.23	198.1	24.8	198.1	189.7
-14	271.4	33.9	271.4	86.0	10.5	86.0	3.16	191.1	23.9	191.1	189.6
-15	264.4	33.0	264.4	85.8	10.5	85.8	3.08	184.3	23.0	184.3	189.3

-- attention: operating limits not reflected in performance table

ZHI46K1P-TWD_R410A_8_BWW

WAMAK TBW 400 EVI HeavyDuty 2L4

Th -OU	45										
[°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin min [kW]	Pin max [kW]	COP nom kW / kW	Qc nom [kW]	Qc min [kW]	Qc max [kW]	I nom [A]
25	658.4	82.3	658.4	106.6	13.0	106.6	6.18	558.8	69.9	558.8	211.5
24	645.4	80.7	645.4	106.5	13.0	106.5	6.06	545.9	68.2	545.9	211.3
23	632.7	79.1	632.7	106.5	13.0	106.5	5.94	533.2	66.7	533.2	211.1
22	620.1	77.5	620.1	106.5	13.0	106.5	5.82	520.7	65.1	520.7	211.0
21	607.8	76.0	607.8	106.5	13.0	106.5	5.71	508.3	63.5	508.3	210.9
20	595.6	74.4	595.6	106.5	13.0	106.5	5.59	496.2	62.0	496.2	210.8
19	583.6	73.0	583.6	106.5	13.0	106.5	5.48	484.2	60.5	484.2	210.8
18	571.8	71.5	571.8	106.5	13.0	106.5	5.37	472.3	59.0	472.3	210.7
17	560.2	70.0	560.2	106.5	13.0	106.5	5.26	460.7	57.6	460.7	210.7
16	548.8	68.6	548.8	106.6	13.0	106.6	5.15	449.2	56.2	449.2	210.8
15	537.5	67.2	537.5	106.6	13.0	106.6	5.04	437.9	54.7	437.9	210.8
14	526.4	65.8	526.4	106.7	13.0	106.7	4.94	426.8	53.4	426.8	210.9
13	515.5	64.4	515.5	106.7	13.0	106.7	4.83	415.9	52.0	415.9	210.9
12	504.8	63.1	504.8	106.8	13.0	106.8	4.73	405.1	50.6	405.1	211.0
11	494.2	61.8	494.2	106.8	13.0	106.8	4.63	394.5	49.3	394.5	211.1
10	483.8	60.5	483.8	106.9	13.0	106.9	4.53	384.0	48.0	384.0	211.2
9	473.6	59.2	473.6	106.9	13.0	106.9	4.43	373.7	46.7	373.7	211.3
8	463.5	57.9	463.5	107.0	13.1	107.0	4.33	363.6	45.4	363.6	211.4
7	453.6	56.7	453.6	107.0	13.1	107.0	4.24	353.6	44.2	353.6	211.5
6	443.8	55.5	443.8	107.1	13.1	107.1	4.14	343.8	43.0	343.8	211.6
5	434.2	54.3	434.2	107.1	13.1	107.1	4.05	334.2	41.8	334.2	211.7
4	424.8	53.1	424.8	107.2	13.1	107.2	3.96	324.7	40.6	324.7	211.7
3	415.5	51.9	415.5	107.2	13.1	107.2	3.88	315.4	39.4	315.4	211.8
2	406.4	50.8	406.4	107.2	13.1	107.2	3.79	306.2	38.3	306.2	211.8
1	397.4	49.7	397.4	107.2	13.1	107.2	3.71	297.2	37.2	297.2	211.9
0	388.5	48.6	388.5	107.2	13.1	107.2	3.62	288.4	36.0	288.4	211.9
-1	379.8	47.5	379.8	107.2	13.1	107.2	3.54	279.7	35.0	279.7	211.8
-2	371.2	46.4	371.2	107.2	13.1	107.2	3.46	271.1	33.9	271.1	211.8
-3	362.8	45.3	362.8	107.1	13.1	107.1	3.39	262.7	32.8	262.7	211.7
-4	354.5	44.3	354.5	107.1	13.1	107.1	3.31	254.5	31.8	254.5	211.6
-5	346.3	43.3	346.3	107.0	13.1	107.0	3.24	246.4	30.8	246.4	211.4
-6	338.3	42.3	338.3	106.9	13.0	106.9	3.16	238.4	29.8	238.4	211.2
-7	330.4	41.3	330.4	106.8	13.0	106.8	3.09	230.6	28.8	230.6	211.0
-8	322.6	40.3	322.6	106.7	13.0	106.7	3.02	222.9	27.9	222.9	210.8
-9	314.9	39.4	314.9	106.6	13.0	106.6	2.96	215.4	26.9	215.4	210.4
-10	307.4	38.4	307.4	106.4	13.0	106.4	2.89	208.0	26.0	208.0	210.1
-11	299.9	37.5	299.9	106.2	13.0	106.2	2.82	200.8	25.1	200.8	209.7
-12	292.6	36.6	292.6	106.0	12.9	106.0	2.76	193.7	24.2	193.7	209.2
-13	285.5	35.7	285.5	105.7	12.9	105.7	2.70	186.7	23.3	186.7	208.7
-14	278.4	34.8	278.4	105.5	12.9	105.5	2.64	179.9	22.5	179.9	208.1
-15	271.4	33.9	271.4	105.2	12.8	105.2	2.58	173.2	21.6	173.2	207.4

-- attention: operating limits not reflected in performance table

WAMAK TBW 400 EVI HeavyDuty 2L4

Th -OU	55										
[°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin min [kW]	Pin max [kW]	COP nom kW / kW	Qc nom [kW]	Qc min [kW]	Qc max [kW]	I nom [A]
25	646.0	80.8	646.0	134.7	16.4	134.7	4.79	520.2	65.0	520.2	245.2
24	634.1	79.3	634.1	134.8	16.5	134.8	4.70	508.1	63.5	508.1	245.1
23	622.3	77.8	622.3	134.9	16.5	134.9	4.61	496.3	62.0	496.3	245.1
22	610.7	76.3	610.7	135.0	16.5	135.0	4.52	484.6	60.6	484.6	245.1
21	599.2	74.9	599.2	135.1	16.5	135.1	4.44	473.1	59.1	473.1	245.2
20	588.0	73.5	588.0	135.2	16.5	135.2	4.35	461.7	57.7	461.7	245.2
19	576.8	72.1	576.8	135.3	16.5	135.3	4.26	450.5	56.3	450.5	245.3
18	565.9	70.7	565.9	135.4	16.5	135.4	4.18	439.4	54.9	439.4	245.4
17	555.1	69.4	555.1	135.5	16.5	135.5	4.10	428.5	53.6	428.5	245.5
16	544.4	68.1	544.4	135.6	16.5	135.6	4.01	417.8	52.2	417.8	245.5
15	533.9	66.7	533.9	135.7	16.6	135.7	3.93	407.2	50.9	407.2	245.6
14	523.6	65.4	523.6	135.8	16.6	135.8	3.86	396.8	49.6	396.8	245.7
13	513.4	64.2	513.4	135.9	16.6	135.9	3.78	386.5	48.3	386.5	245.8
12	503.3	62.9	503.3	136.0	16.6	136.0	3.70	376.4	47.0	376.4	245.9
11	493.4	61.7	493.4	136.0	16.6	136.0	3.63	366.4	45.8	366.4	246.0
10	483.6	60.5	483.6	136.1	16.6	136.1	3.55	356.5	44.6	356.5	246.1
9	474.0	59.3	474.0	136.2	16.6	136.2	3.48	346.8	43.4	346.8	246.1
8	464.5	58.1	464.5	136.2	16.6	136.2	3.41	337.3	42.2	337.3	246.2
7	455.1	56.9	455.1	136.3	16.6	136.3	3.34	327.9	41.0	327.9	246.2
6	445.9	55.7	445.9	136.3	16.6	136.3	3.27	318.6	39.8	318.6	246.2
5	436.8	54.6	436.8	136.3	16.6	136.3	3.20	309.5	38.7	309.5	246.2
4	427.8	53.5	427.8	136.3	16.6	136.3	3.14	300.5	37.6	300.5	246.1
3	419.0	52.4	419.0	136.3	16.6	136.3	3.07	291.7	36.5	291.7	246.0
2	410.2	51.3	410.2	136.2	16.6	136.2	3.01	283.0	35.4	283.0	245.9
1	401.6	50.2	401.6	136.2	16.6	136.2	2.95	274.5	34.3	274.5	245.8
0	393.1	49.1	393.1	136.1	16.6	136.1	2.89	266.0	33.3	266.0	245.6
-1	384.7	48.1	384.7	136.0	16.6	136.0	2.83	257.7	32.2	257.7	245.4
-2	376.5	47.1	376.5	135.9	16.6	135.9	2.77	249.6	31.2	249.6	245.1
-3	368.3	46.0	368.3	135.7	16.6	135.7	2.71	241.5	30.2	241.5	244.8
-4	360.3	45.0	360.3	135.6	16.5	135.6	2.66	233.6	29.2	233.6	244.4
-5	352.3	44.0	352.3	135.4	16.5	135.4	2.60	225.9	28.2	225.9	244.0
-6	344.5	43.1	344.5	135.2	16.5	135.2	2.55	218.2	27.3	218.2	243.6
-7	336.7	42.1	336.7	134.9	16.5	134.9	2.50	210.7	26.3	210.7	243.1
-8	329.1	41.1	329.1	134.7	16.4	134.7	2.44	203.3	25.4	203.3	242.5
-9	321.6	40.2	321.6	134.4	16.4	134.4	2.39	196.1	24.5	196.1	241.9
-10	314.1	39.3	314.1	134.1	16.4	134.1	2.34	188.9	23.6	188.9	241.2
-11	306.7	38.3	306.7	133.7	16.3	133.7	2.29	181.9	22.7	181.9	240.4
-12	299.5	37.4	299.5	133.3	16.3	133.3	2.25	175.0	21.9	175.0	239.6
-13	292.3	36.5	292.3	132.9	16.2	132.9	2.20	168.2	21.0	168.2	238.7
-14	285.2	35.7	285.2	132.4	16.2	132.4	2.15	161.5	20.2	161.5	237.7
-15	278.2	34.8	278.2	131.9	16.1	131.9	2.11	155.0	19.4	155.0	236.6

-- attention: operating limits not reflected in performance table

WAMAK TBW 400 EVI HeavyDuty 2L4

Th -OU	65 (T-max)										
[°C]	Qh nom [kW]	Qh min [kW]	Qh max [kW]	Pin nom [kW]	Pin min [kW]	Pin max [kW]	COP nom kW / kW	Qc nom [kW]	Qc min [kW]	Qc max [kW]	I nom [A]
25	637.6	79.7	637.6	171.7	21.0	171.7	3.71	477.3	59.7	477.3	288.0
24	626.6	78.3	626.6	171.9	21.0	171.9	3.65	466.1	58.3	466.1	288.2
23	615.7	77.0	615.7	172.0	21.0	172.0	3.58	455.0	56.9	455.0	288.4
22	604.9	75.6	604.9	172.1	21.0	172.1	3.51	444.1	55.5	444.1	288.6
21	594.2	74.3	594.2	172.3	21.0	172.3	3.45	433.4	54.2	433.4	288.9
20	583.7	73.0	583.7	172.4	21.0	172.4	3.39	422.8	52.8	422.8	289.1
19	573.4	71.7	573.4	172.5	21.0	172.5	3.32	412.3	51.5	412.3	289.3
18	563.2	70.4	563.2	172.6	21.1	172.6	3.26	402.0	50.2	402.0	289.6
17	553.1	69.1	553.1	172.7	21.1	172.7	3.20	391.8	49.0	391.8	289.8
16	543.1	67.9	543.1	172.8	21.1	172.8	3.14	381.7	47.7	381.7	290.0
15	533.2	66.7	533.2	172.9	21.1	172.9	3.08	371.8	46.5	371.8	290.2
14	523.5	65.4	523.5	172.9	21.1	172.9	3.03	362.0	45.3	362.0	290.4
13	513.9	64.2	513.9	173.0	21.1	173.0	2.97	352.4	44.0	352.4	290.6
12	504.4	63.1	504.4	173.0	21.1	173.0	2.92	342.8	42.9	342.8	290.7
11	495.1	61.9	495.1	173.1	21.1	173.1	2.86	333.4	41.7	333.4	290.8
10	485.8	60.7	485.8	173.1	21.1	173.1	2.81	324.2	40.5	324.2	291.0
9	476.7	59.6	476.7	173.1	21.1	173.1	2.75	315.1	39.4	315.1	291.0
8	467.7	58.5	467.7	173.0	21.1	173.0	2.70	306.1	38.3	306.1	291.1
7	458.7	57.3	458.7	173.0	21.1	173.0	2.65	297.2	37.1	297.2	291.1
6	449.9	56.2	449.9	172.9	21.1	172.9	2.60	288.4	36.1	288.4	291.1
5	441.2	55.2	441.2	172.8	21.1	172.8	2.55	279.8	35.0	279.8	291.0
4	432.6	54.1	432.6	172.7	21.1	172.7	2.50	271.3	33.9	271.3	290.9
3	424.1	53.0	424.1	172.6	21.1	172.6	2.46	262.9	32.9	262.9	290.8
2	415.7	52.0	415.7	172.4	21.0	172.4	2.41	254.7	31.8	254.7	290.6
1	407.4	50.9	407.4	172.2	21.0	172.2	2.37	246.5	30.8	246.5	290.3
0	399.1	49.9	399.1	172.0	21.0	172.0	2.32	238.5	29.8	238.5	290.0
-1	391.0	48.9	391.0	171.8	21.0	171.8	2.28	230.6	28.8	230.6	289.7
-2	382.9	47.9	382.9	171.5	20.9	171.5	2.23	222.8	27.8	222.8	289.3
-3	375.0	46.9	375.0	171.2	20.9	171.2	2.19	215.1	26.9	215.1	288.8
-4	367.1	45.9	367.1	170.9	20.9	170.9	2.15	207.5	25.9	207.5	288.3
-5	359.3	44.9	359.3	170.5	20.8	170.5	2.11	200.1	25.0	200.1	287.7
-6	351.6	43.9	351.6	170.1	20.8	170.1	2.07	192.7	24.1	192.7	287.0
-7	343.9	43.0	343.9	169.7	20.7	169.7	2.03	185.5	23.2	185.5	286.3
-8	336.3	42.0	336.3	169.2	20.6	169.2	1.99	178.3	22.3	178.3	285.5
-9	328.8	41.1	328.8	168.7	20.6	168.7	1.95	171.3	21.4	171.3	284.6
-10	321.4	40.2	321.4	168.1	20.5	168.1	1.91	164.4	20.5	164.4	283.6
-11	314.0	39.3	314.0	167.6	20.4	167.6	1.87	157.6	19.7	157.6	282.6
-12	306.7	38.3	306.7	166.9	20.4	166.9	1.84	150.9	18.9	150.9	281.5
-13	299.5	37.4	299.5	166.3	20.3	166.3	1.80	144.2	18.0	144.2	280.3
-14	292.3	36.5	292.3	165.5	20.2	165.5	1.77	137.7	17.2	137.7	279.0
-15	285.2	35.6	285.2	164.8	20.1	164.8	1.73	131.3	16.4	131.3	277.6

-- attention: operating limits not reflected in performance table

WAMAK TBW 400 EVI HeavyDuty 2L4

Tc -OU		W 12 / 7 °C										
Ts -IN	Qc nom	Qc min	Qc max	Pin nom	Pin min	Pin max	EER	Qh nom	Qh min	Qh max	I nom	
[°C]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	kW / kW	[kW]	[kW]	[kW]	[A]	
40	281.6	35.2	281.6	116.0	14.2	116.0	2.43	389.9	48.7	389.9	221.9	
39	283.6	35.5	283.6	113.4	13.8	113.4	2.50	389.5	48.7	389.5	218.9	
38	285.6	35.7	285.6	110.9	13.5	110.9	2.58	389.1	48.6	389.1	216.0	
37	287.4	35.9	287.4	108.4	13.2	108.4	2.65	388.7	48.6	388.7	213.2	
36	289.3	36.2	289.3	106.0	12.9	106.0	2.73	388.3	48.5	388.3	210.5	
35	291.0	36.4	291.0	103.7	12.7	103.7	2.81	387.9	48.5	387.9	207.8	
34	292.8	36.6	292.8	101.4	12.4	101.4	2.89	387.5	48.4	387.5	205.3	
33	294.4	36.8	294.4	99.2	12.1	99.2	2.97	387.1	48.4	387.1	202.7	
32	296.0	37.0	296.0	97.0	11.8	97.0	3.05	386.6	48.3	386.6	200.3	
31	297.6	37.2	297.6	94.9	11.6	94.9	3.14	386.2	48.3	386.2	197.9	
30	299.1	37.4	299.1	92.8	11.3	92.8	3.22	385.8	48.2	385.8	195.5	
29	300.6	37.6	300.6	90.8	11.1	90.8	3.31	385.3	48.2	385.3	193.2	
28	302.0	37.7	302.0	88.8	10.8	88.8	3.40	384.9	48.1	384.9	191.0	
27	303.3	37.9	303.3	86.8	10.6	86.8	3.49	384.4	48.1	384.4	188.8	
26	304.6	38.1	304.6	84.9	10.4	84.9	3.59	384.0	48.0	384.0	186.6	
25	305.9	38.2	305.9	83.1	10.1	83.1	3.68	383.5	47.9	383.5	184.5	
24	307.1	38.4	307.1	81.2	9.9	81.2	3.78	383.0	47.9	383.0	182.4	
23	308.3	38.5	308.3	79.4	9.7	79.4	3.88	382.4	47.8	382.4	180.3	
22	309.4	38.7	309.4	77.7	9.5	77.7	3.98	381.9	47.7	381.9	178.3	
21	310.4	38.8	310.4	75.9	9.3	75.9	4.09	381.3	47.7	381.3	176.2	
20	311.5	38.9	311.5	74.2	9.1	74.2	4.20	380.8	47.6	380.8	174.2	

Tc [°C]		W 23 / 18 °C										
0	Qc nom	Qc min	Qc max	Pin nom	Pin min	Pin max	EER	Qh nom	Qh min	Qh max	I nom	
[°C]	[kW]	[kW]	[kW]	[kW]	[kW]	[kW]	kW / kW	[kW]	[kW]	[kW]	[A]	
40	375.5	46.9	375.5	116.0	14.2	116.0	3.24	483.6	60.4	484.0	221.7	
39	378.0	47.3	378.0	113.4	13.8	113.4	3.33	483.6	60.5	483.8	218.6	
38	380.5	47.6	380.5	110.9	13.5	110.9	3.43	483.7	60.5	483.7	215.6	
37	382.8	47.9	382.8	108.4	13.2	108.4	3.53	483.8	60.5	483.6	212.6	
36	385.2	48.1	385.2	106.0	12.9	106.0	3.63	483.9	60.5	483.6	209.8	
35	387.4	48.4	387.4	103.7	12.7	103.7	3.74	484.0	60.5	483.5	207.0	
34	389.6	48.7	389.6	101.4	12.4	101.4	3.84	484.0	60.5	483.5	204.2	
33	391.8	49.0	391.8	99.2	12.1	99.2	3.95	484.1	60.5	483.5	201.6	
32	393.9	49.2	393.9	97.0	11.8	97.0	4.06	484.3	60.5	483.5	199.0	
31	396.0	49.5	396.0	94.9	11.6	94.9	4.17	484.4	60.5	483.5	196.4	
30	398.0	49.7	398.0	92.8	11.3	92.8	4.29	484.5	60.6	483.6	193.9	
29	399.9	50.0	399.9	90.8	11.1	90.8	4.41	484.6	60.6	483.6	191.4	
28	401.8	50.2	401.8	88.8	10.8	88.8	4.53	484.7	60.6	483.7	189.0	
27	403.7	50.5	403.7	86.8	10.6	86.8	4.65	484.8	60.6	483.8	186.6	
26	405.5	50.7	405.5	84.9	10.4	84.9	4.77	484.8	60.6	483.9	184.2	
25	407.2	50.9	407.2	83.1	10.1	83.1	4.90	484.9	60.6	484.0	181.9	
24	408.9	51.1	408.9	81.2	9.9	81.2	5.03	485.0	60.6	484.0	179.6	
23	410.6	51.3	410.6	79.4	9.7	79.4	5.17	485.1	60.6	484.1	177.3	
22	412.2	51.5	412.2	77.7	9.5	77.7	5.31	485.1	60.6	484.3	175.0	
21	413.8	51.7	413.8	75.9	9.3	75.9	5.45	485.2	60.6	484.4	172.8	
20	415.3	51.9	415.3	74.2	9.1	74.2	5.60	485.2	60.6	484.5	170.5	

-- attention: operating limits not reflected in performance table

LEGEND:

Ts-IN: Temperature renewable source - inlet [°C]

Th-OU: Temperature heating - outlet (flow) [°C]

Tc-OU: Temperature cooling - outlet (flow) [°C]

Qh nom: Heating capacity nominal

Qh min: Heating capacity minimal

Qh max: Heating capacity maximal

Pin nom: Power input at nominal heating capacity

Pin min: Power input at minimal heating capacity

Pin max: Power input at maximal heating capacity

COP nom: coefficient of performance at nominal heating capacity

Qc nom: cooling / heat extraction capacity at nominal heating capacity



Qc min: cooling / heat extraction at minimal heating capacity







Qc max: cooling / heat extraction at maximal heating capacity



I nom: Current at nominal heating capacity


EER: energy efficiency ratio at nominal cooling capacity


Operating limits

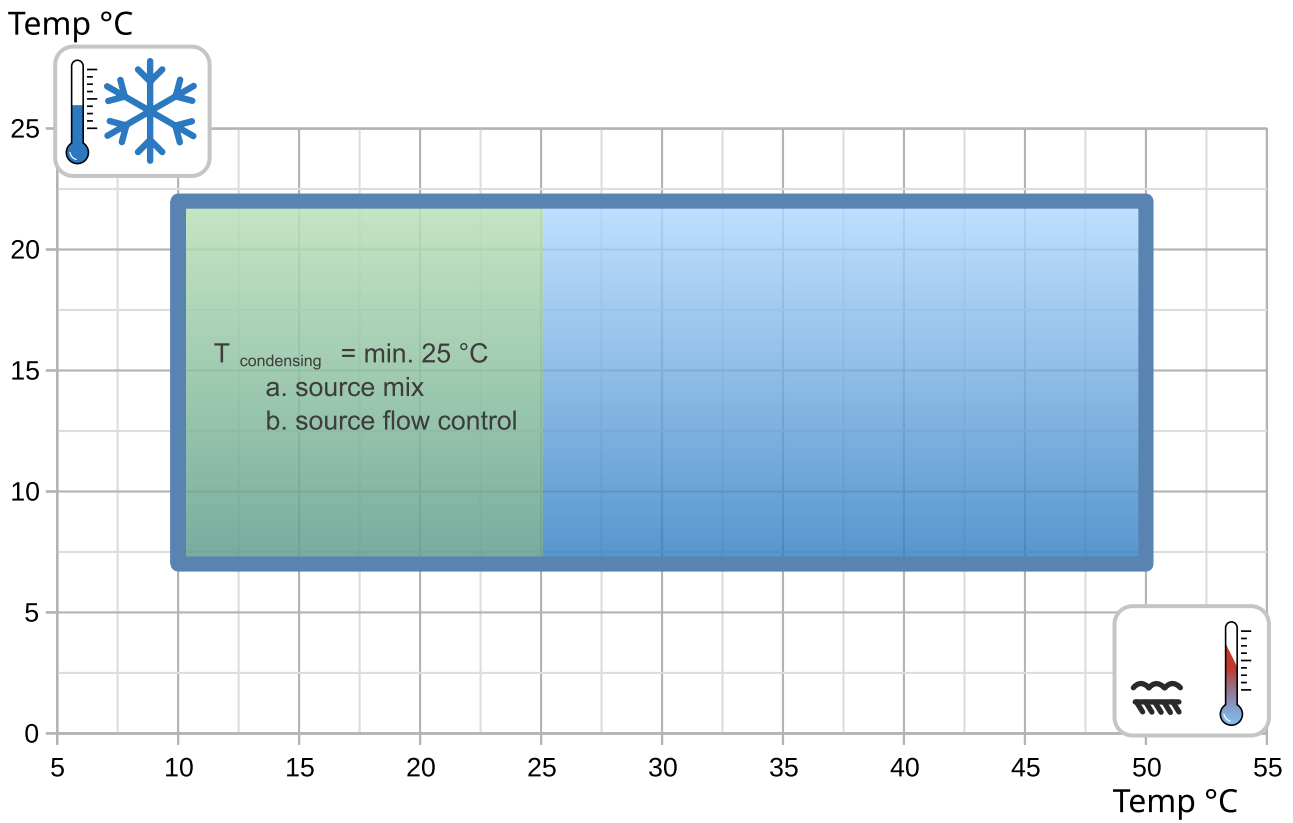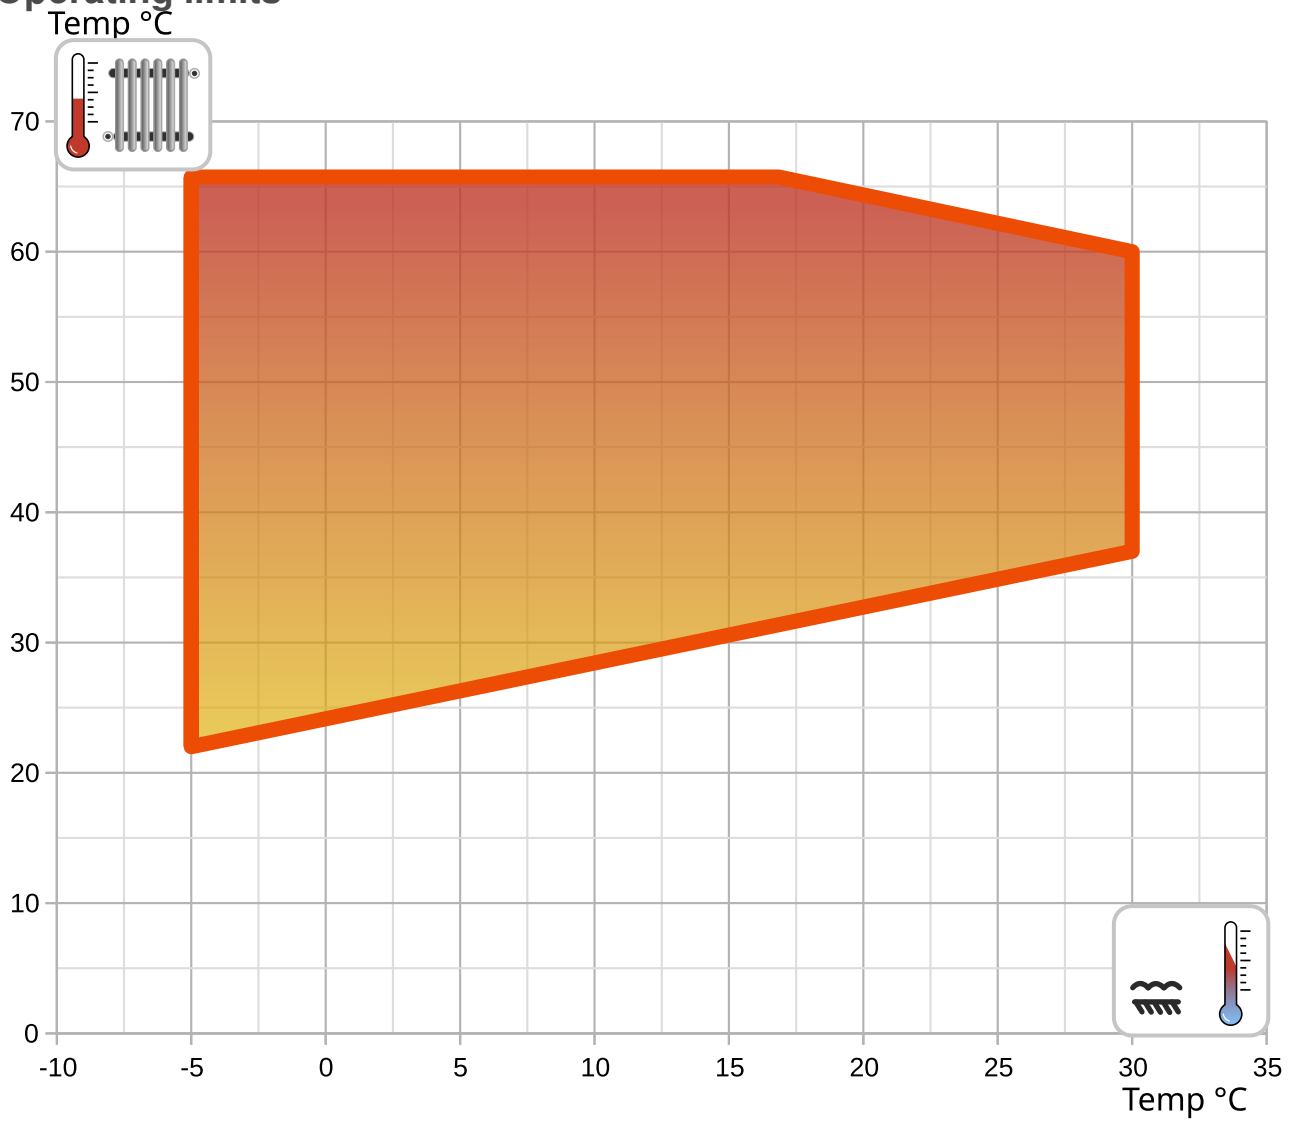

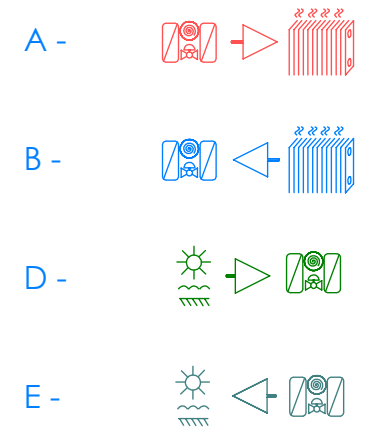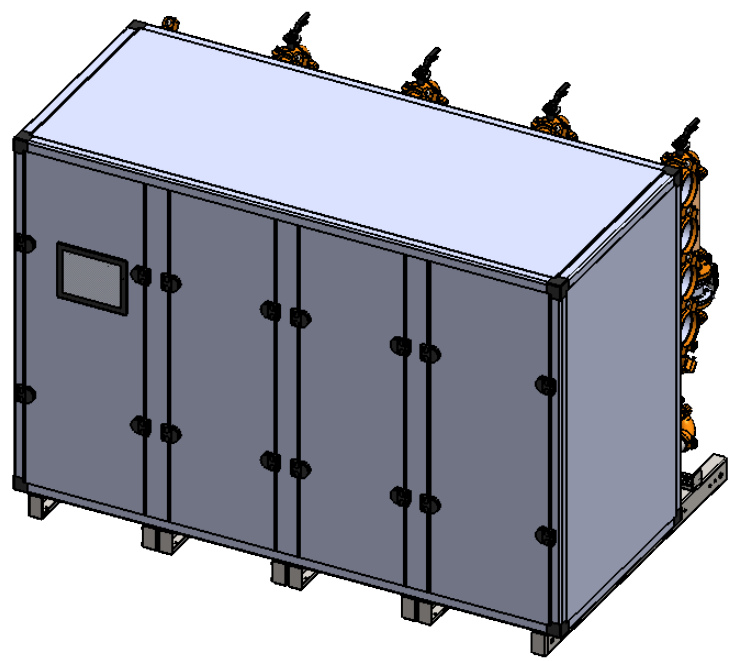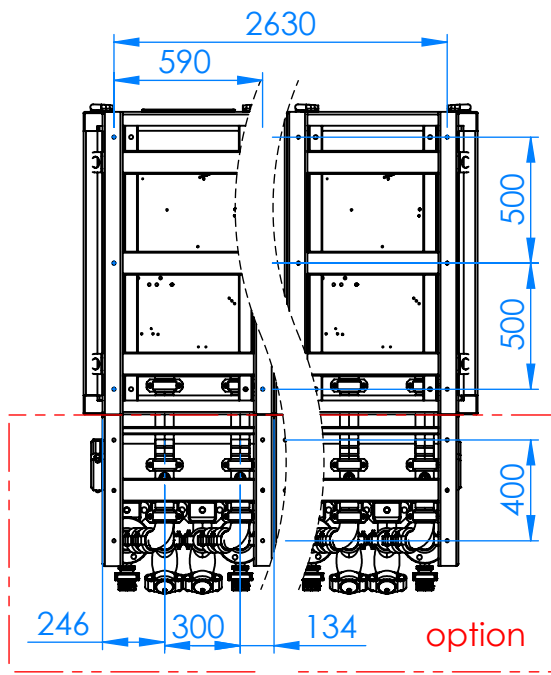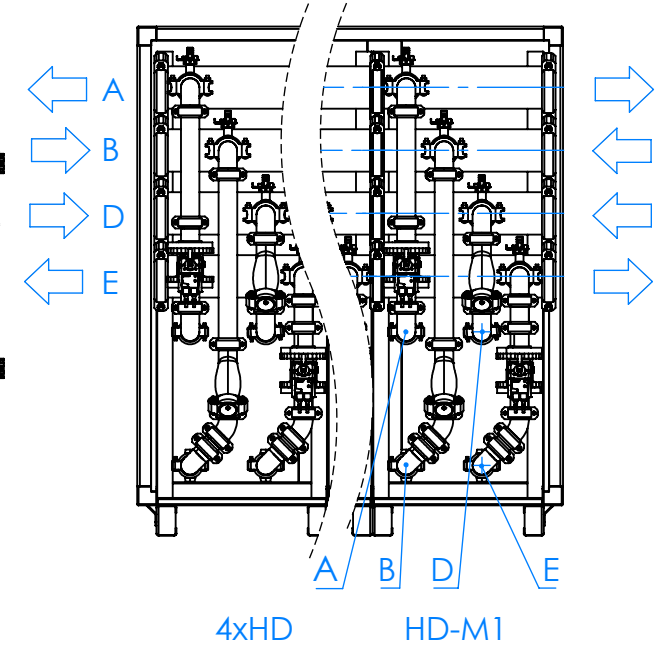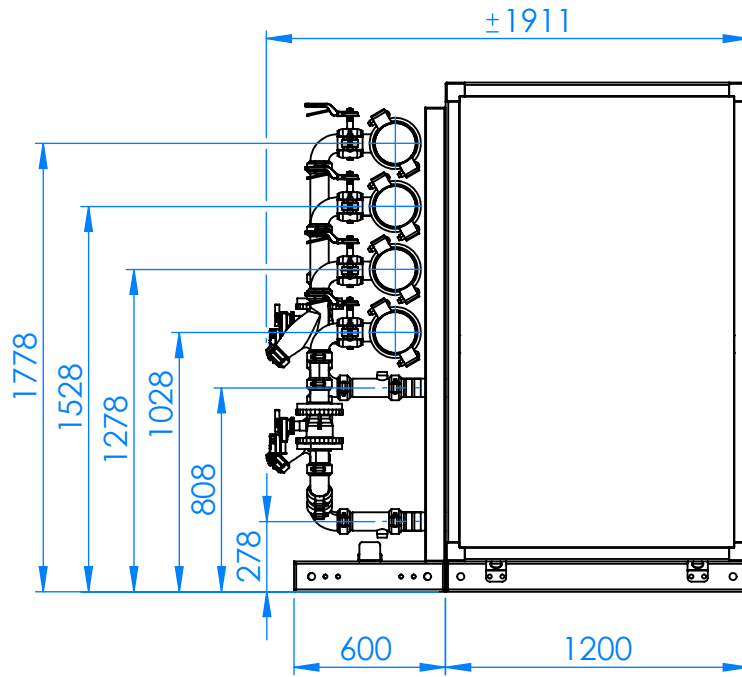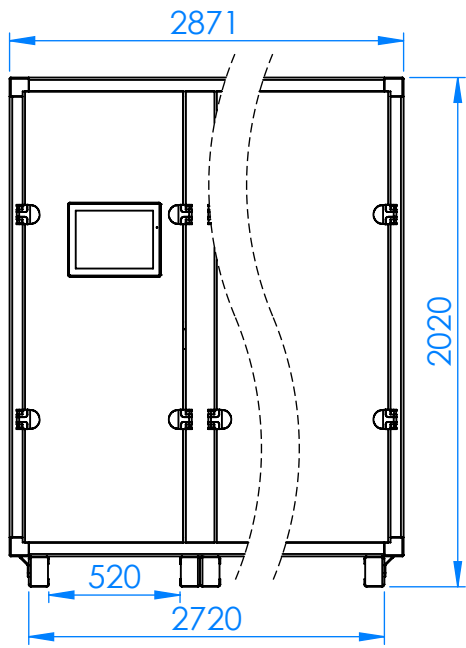

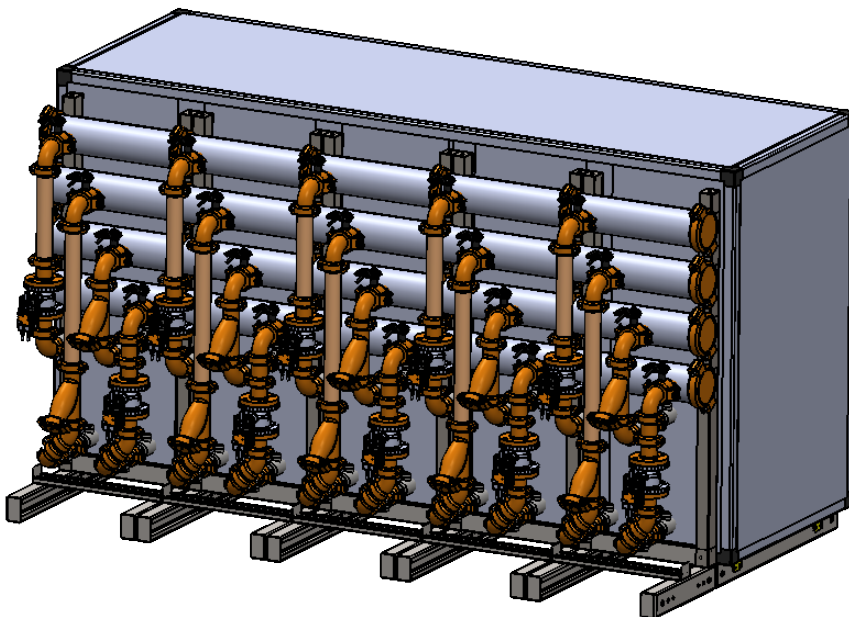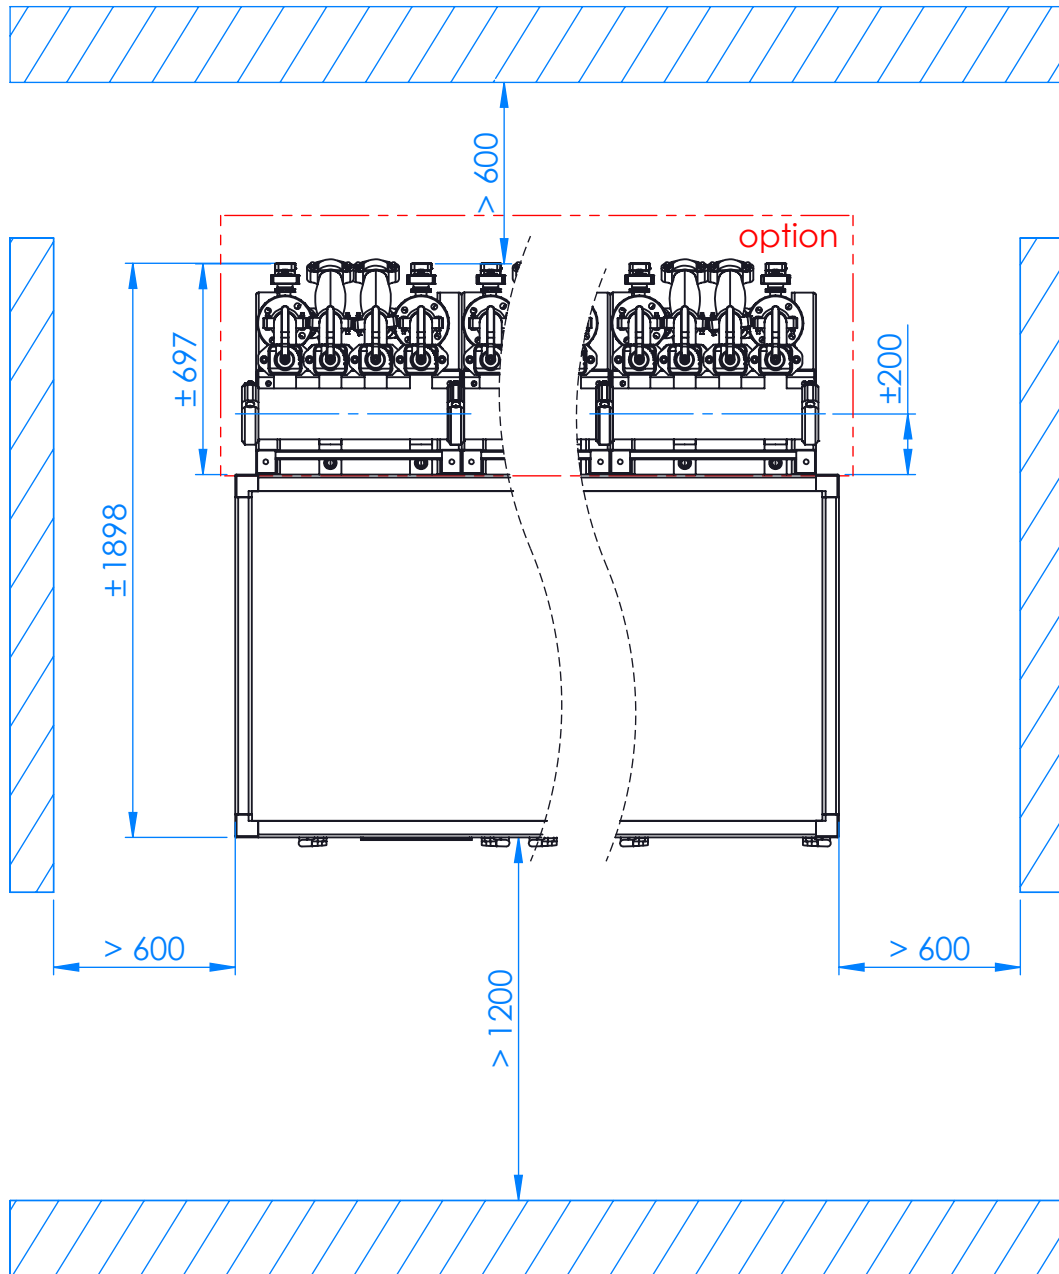

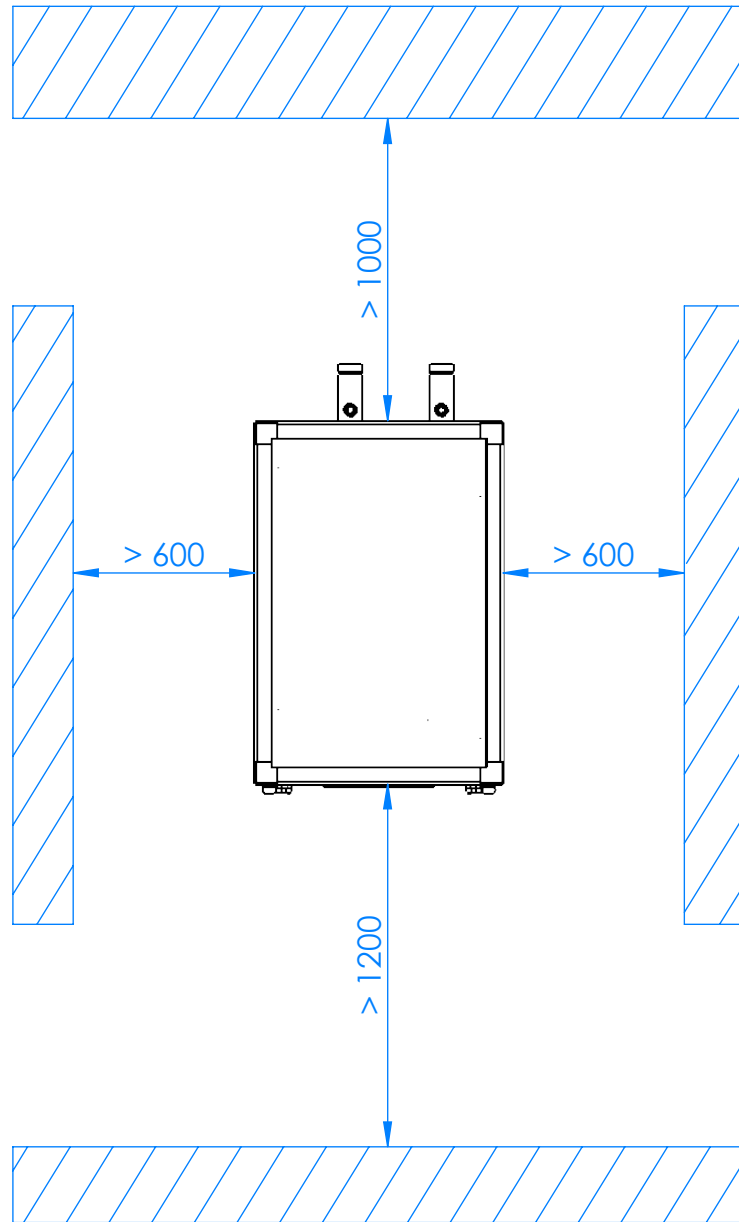

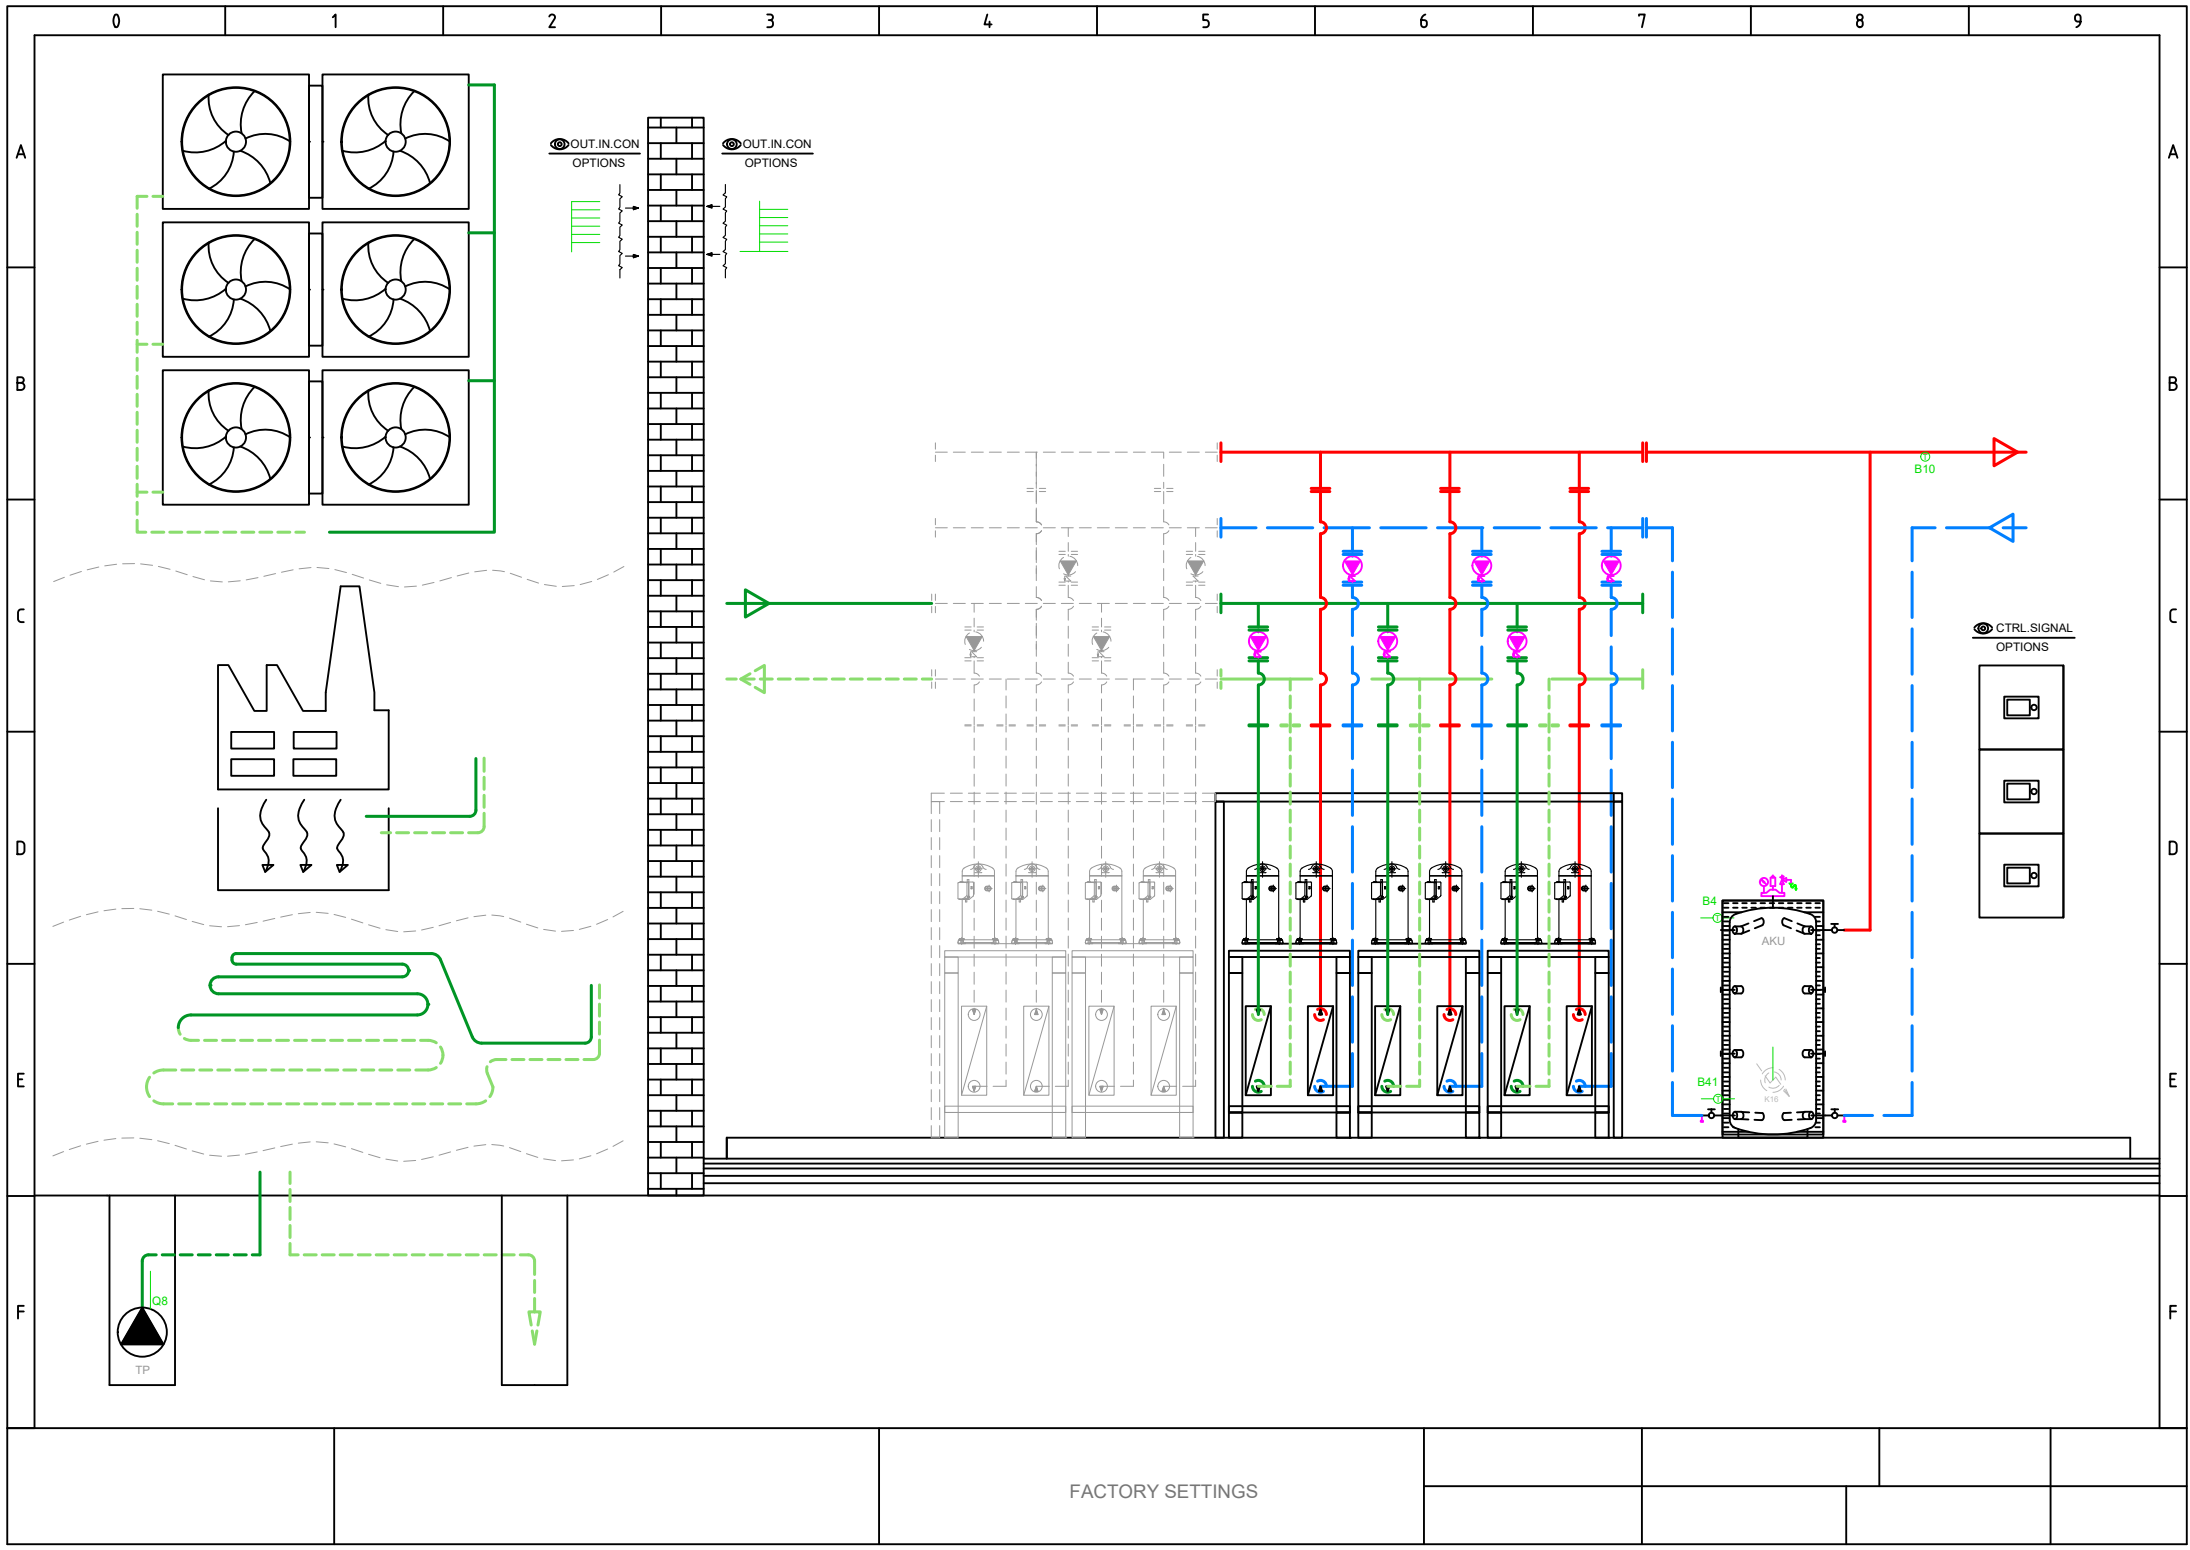

Total: max 6A
1 x QX...: max 2A

Main power supply 230V / 50 Hz
Ground
Neutral conductor

- E9 Low-pressure switch E9
- E10 High-pressure switch E10
- E15 Flow switch source E15
- E24 Flow switch consumers E24
- E6 Electrical utility lock E6
- E12 Overload compressor 2 E12
- E21 Mains supervision E21
- E22 Mains supervision E22
- E23 Mains supervision E23
- E11 Overload compressor 1 E11
- K1 Compressor stage 1 K1

Q8 Source pump Q8

Q9 Condenser pump Q9


K10 Alarm output K10

K40 Crankcase heater K40

K81 Valve evaporator K81

K82 Valve EVI K82


K2 Compressor stage 2 K2

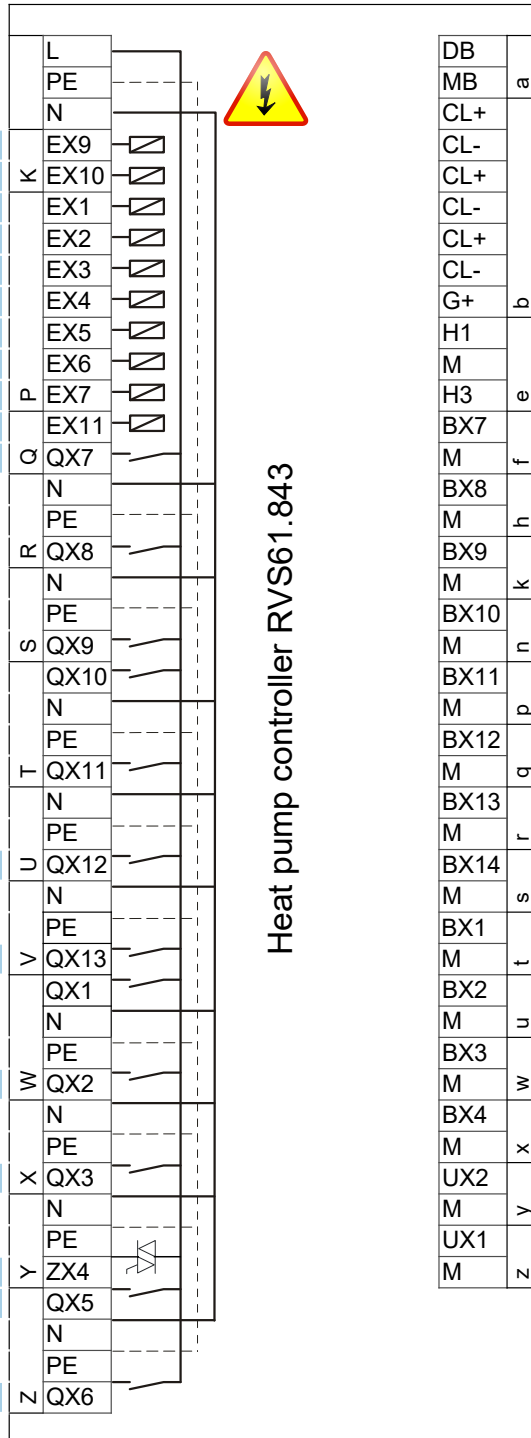

- DB LPB Bus data
- MB LPB Bus GND
- CL+ Room unit QAA...
- CL- Room unit QAA...
- CL+ Room unit QAA... 2.
- CL- Room unit QAA... 2.
- CL+ Room unit QAA... 3.
- CL- Room unit QAA... 3.
- G+ 12V supply → OUT
- H1
- M
- H3 Consumer request VK1
- BX7 B81 Hot-gas sensor K1 B81
- M
- BX8
- M
- BX9
- M
- BX10 B21 HP flow sensor B21
- M
- BX11
- M
- BX12 B71 HP return sensor B71
- M
- BX13 B91 Source inlet sensor B91
- M
- BX14 B84 Source outl sens B92/B84
- M
- BX1
- M
- BX2
- M
- BX3 B83 Refrig sensor liquid B83
- M
- BX4 B82 Hot-gas sensor K2 B82
- M
- UX2 Condenser pump Q9
- M
- UX1 0..10 V Signal
- M
- Z 0..10 V Signal



- AVS75.390
- AVS75.391
- AVS75.370

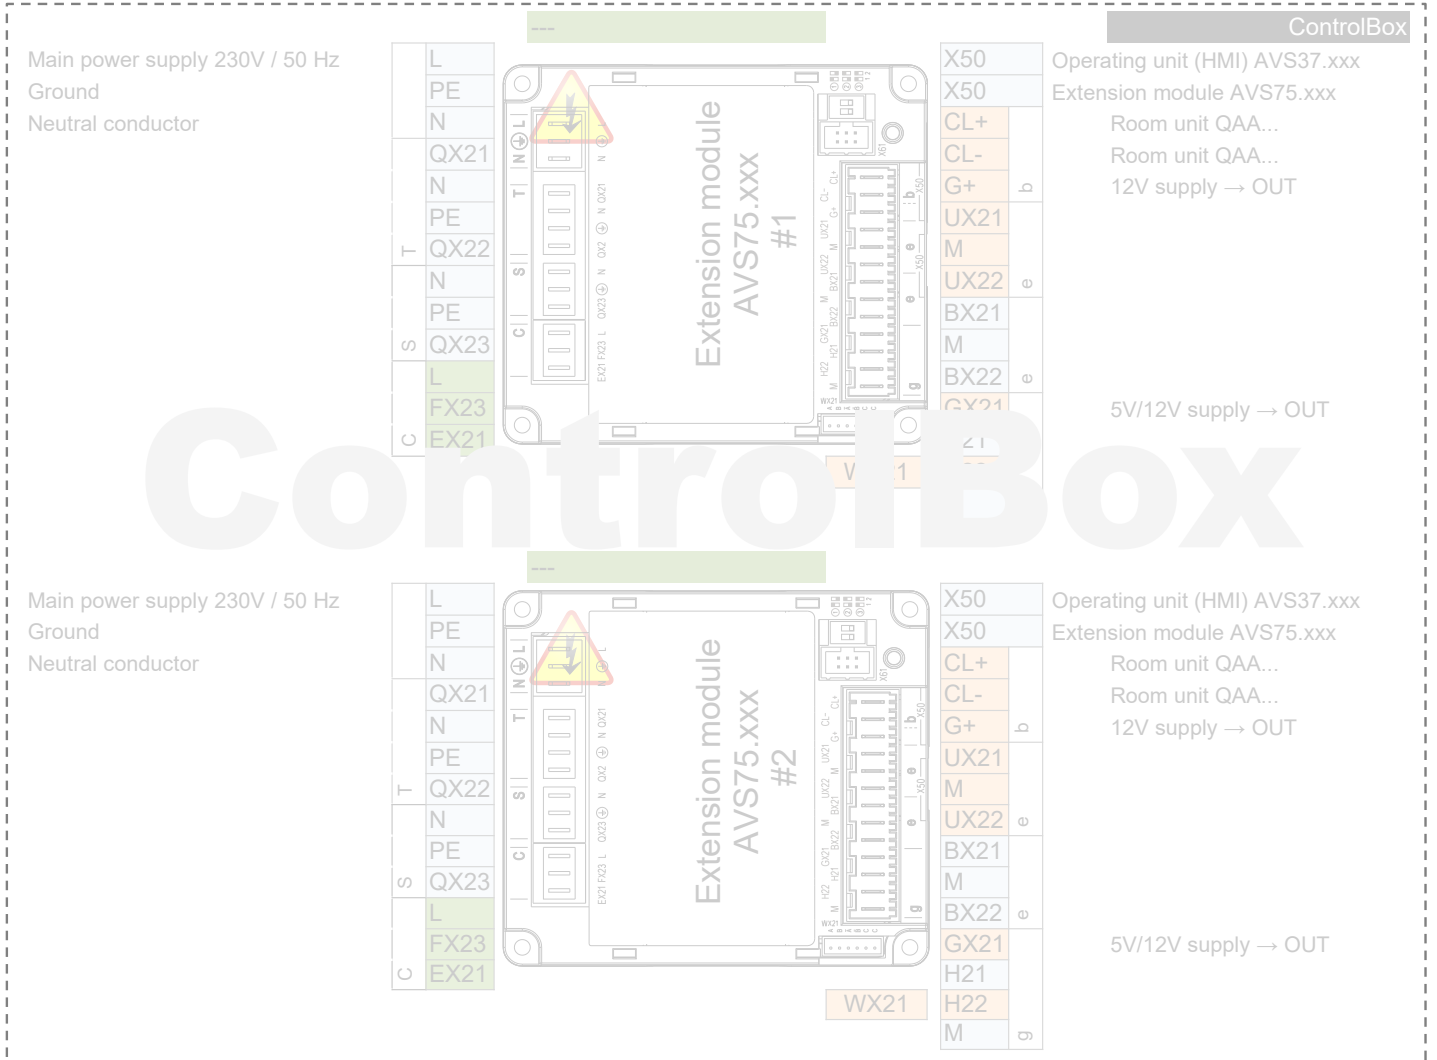

HEAT PUMP

EXTERNAL
INTERNAL



K1

K2

K82

K81

K40

K10

Q8 UX1

Q9 UX2

E11
KRW1
F1K
E11


E12
KRW2
F2K
E12

E6

Q9 ERR
F1S
E24

Q8.ERR
F1Z
E15

E10
E9



230V,50Hz max 6A

0...10V



DO



0...10V



DO



0...10V



DO



0...10V



DO



0...10V



DO



0...10V



DO



0...10V



DO



0...10V



DO





0...10V



DO




DO

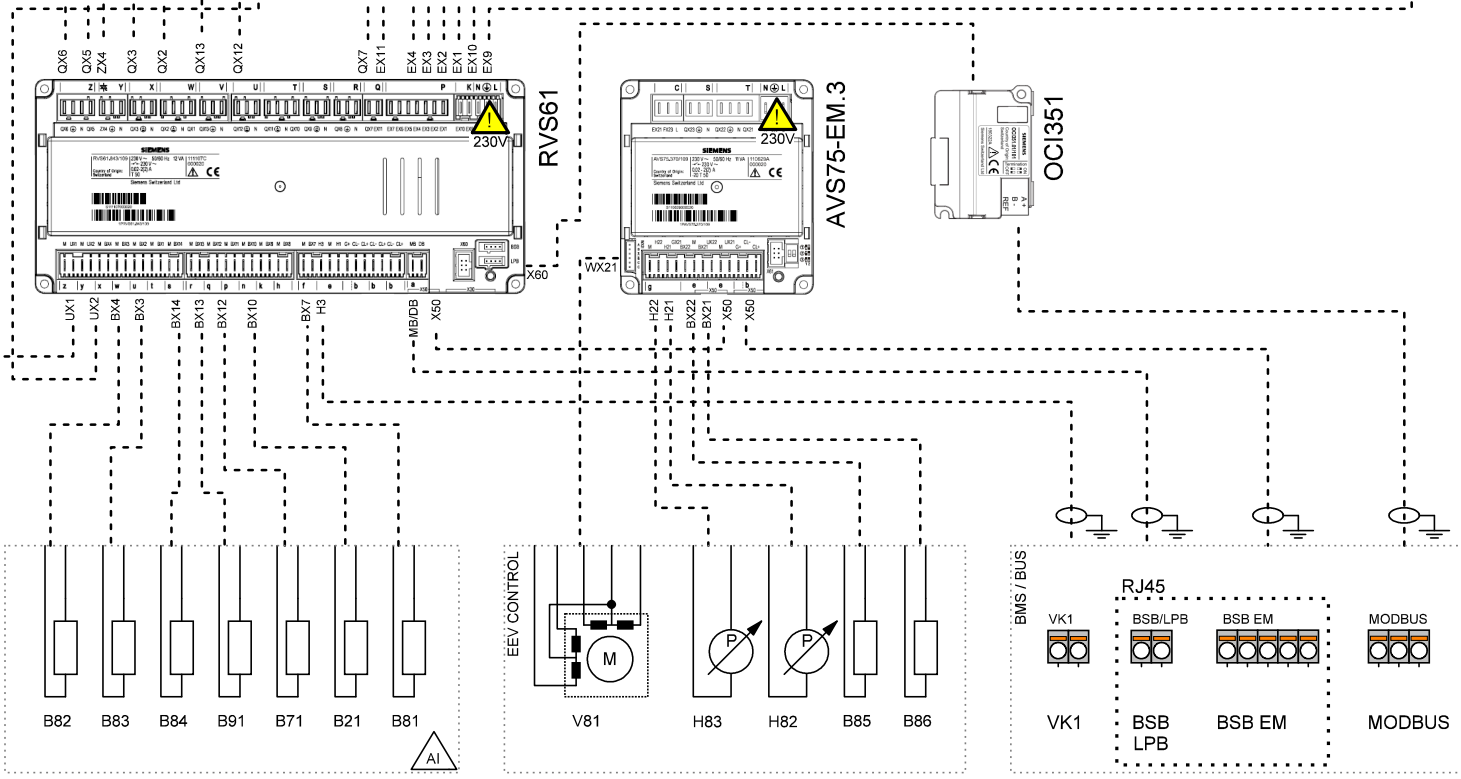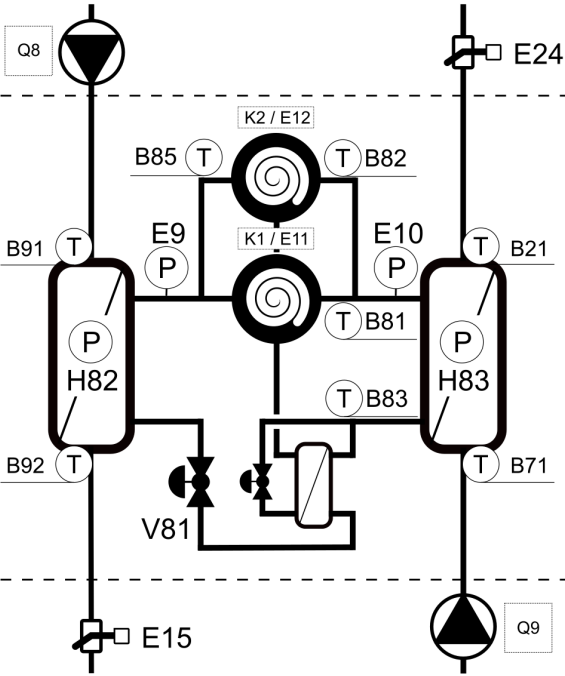

PWR SPLY: 3~ 400V, 50 Hz
CTRL: 1~ 230V, 50 HZ

Company	Title	Version / Note	Number	Created by	Date	Page
	TBW-TWW	05/2024				1

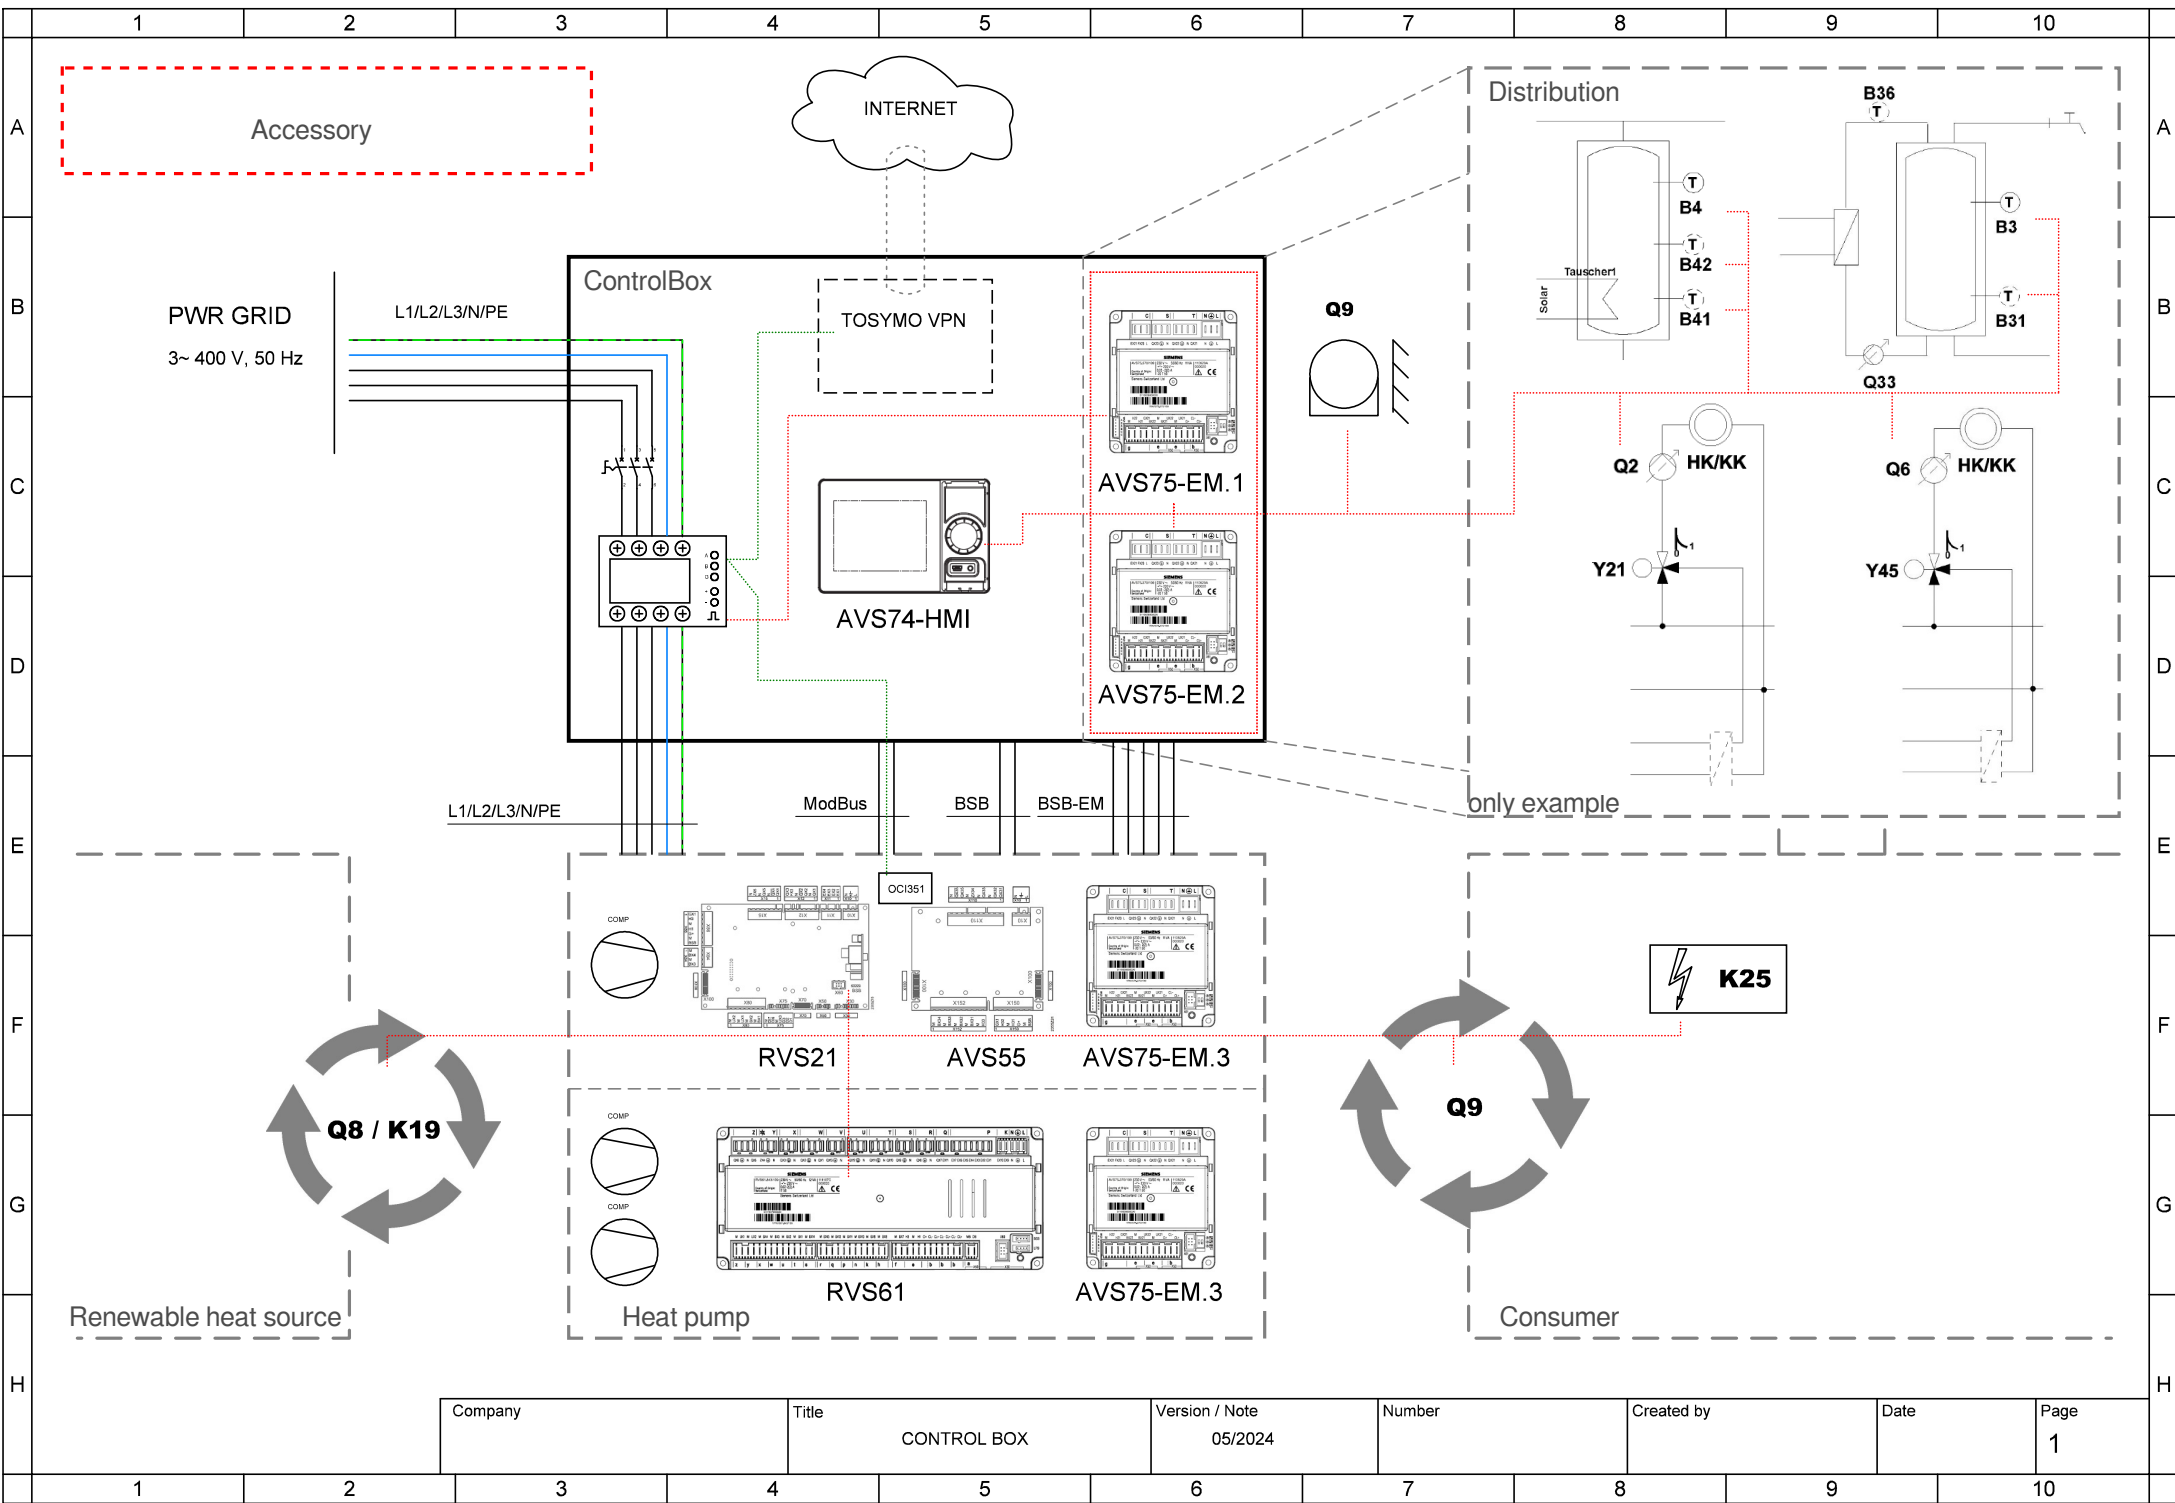

Company	Title	Version / Note	Number	Created by	Date	Page
	CONTROL BOX	05/2024				1



A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

1 2 3 4 5 6 7 8 9 10

1 2 3 4 5 6 7 8 9 10



Company	Title	Version / Note	Number	Created by	Date	Page
	CONTROL BOX	05/2024				3



Company	Title	Version / Note	Number	Created by	Date	Page
	CONTROL BOX	05/2024				4


- AVS75.390
- AVS75.391
- AVS75.370

- AVS75.370**
 Main power supply 230V / 50 Hz
 Ground
 Neutral conductor
Y1 Mixing valve Open

Y2 Mixing valve Close

Q2 Heat circuit pump HC1 Q2

L Phase 230V
E61 Smart grid E61

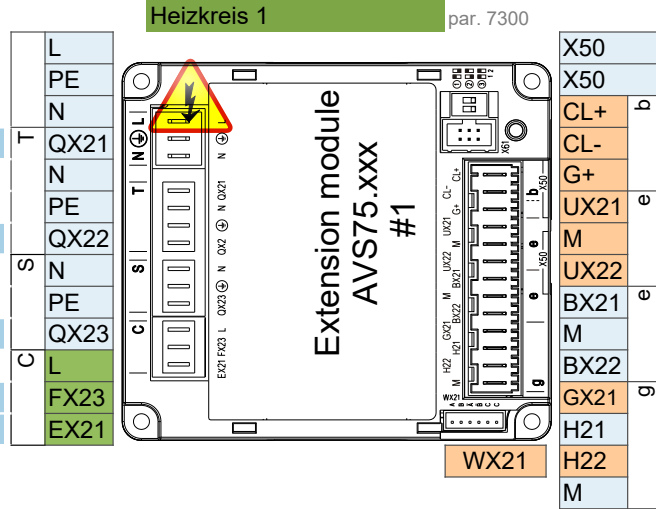

- Extension module AVS75.xxx
 Room unit QAA...
 Room unit QAA...

B1 Flow sensor 1


 Pulse count

- AVS75.370**
 Main power supply 230V / 50 Hz
 Ground
 Neutral conductor
Q3 DHW ctrl elem Q3

K6 El imm heater DHW K6

Q6 Heat circuit pump HC2 Q6

L Phase 230V
E62 Smart grid E62

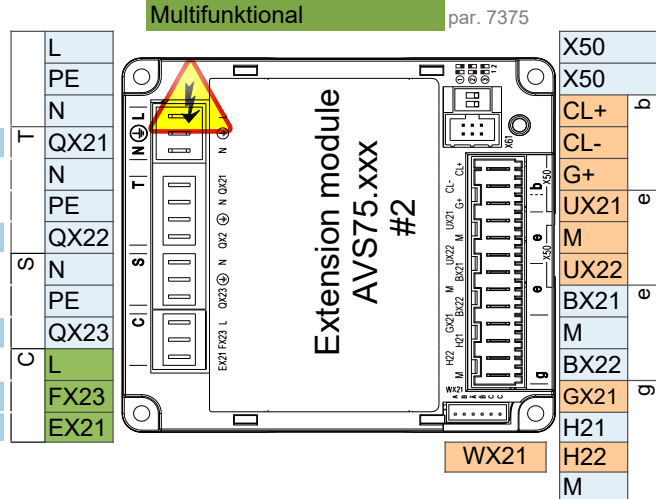


- Operating unit (HMI) AVS37.xxx
 Extension module AVS75.xxx
 Room unit QAA...
 Room unit QAA...

B3 DHW sensor B3

B4 Buffer sensor B4

- Main power supply 230V / 50 Hz
 Ground
 Neutral conductor

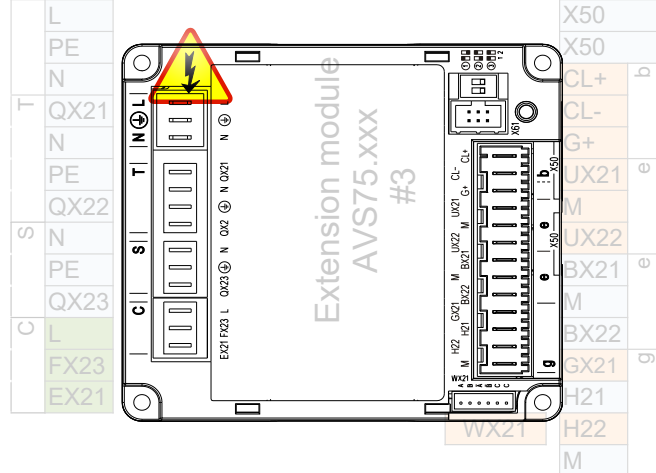

- Operating unit (HMI) AVS37.xxx
 Extension module AVS75.xxx
 Room unit QAA...
 Room unit QAA...

Attention: Extension module 3 is inside the heat pump

Control connection options

1 ControlBox

ControlBox, with two built-in extension modules, enables numerous options for application control on the consumer side behind the heat pump. For more, see the ControlBox schematic and the application diagrams sheet.

2 Fix flow temperature setpoint - On / Off dry (potential free) contact

2 wire shielded cable 2 x 0.5 mm² - Setpoint = 45°C (editable by param. 1859)

Connection terminal - see wiring diagram

3 Analog 0..10V flow temperature setpoint control

2 wire shielded cable 2 x 0.5 mm² - Setpoint: 0V = 16°C ~ 10V = 60°C (editable in parameter set)

Connection terminal - see wiring diagram

4 ModBus RTU communication command

3 wire shielded cable min. 3 x 0.25mm²

For ModBus mapping table contact technical support

5 MQTT IoT communication protocol

For more information contact technical support